

MAXxAIR®

VENTILATION SOLUTIONS

YOUR #1 CHOICE FOR RV VENTILATION



THE ONLY VENT COVER TUFF ENOUGH
6-YEAR Limited WARRANTY*

*see website for warranty details

MAXxAIR II

RAIN COVER FOR RV ROOF VENTS

More Vent Area Than Any Other Vent Cover.
Twice The Vent Area Of Our Original Vent Cover!


- ▶ Exclusive side louvers provide cross ventilation - MORE FRESH AIR, **RAIN OR SHINE!**
- ▶ The MaxxAir II is the ONLY vent cover that includes hinged brackets for easy opening for cleaning and inspection

FOR INSTALLATION OVER HIGH POWERED RV FAN VENTILATORS SEE DETAILED INSTRUCTIONS ON BACK.

INSTALLATION INSTRUCTIONS

FOR STANDARD ROOF VENTS

1. Based on your roof vent location, choose which side of the MaxxAir II to install the hinged brackets. Install as shown in Fig. 1 using the #10-32 screws and locknuts provided.
2. With the louvers facing the rear of the vehicle, slide the MaxxAir II with the installed hinged brackets up to the side of your roof vent. Center the brackets front to back on the vent side wall. Mark center of slots in brackets onto the roof vent side wall. Move MaxxAir II out of the way. Drill one 3/16" hole at center of the marked slots. Attach brackets with the #8-32 screw. Place fender washers, lock washers and nuts on the inside of the roof vent side wall.
3. Close MaxxAir II, mark location of feet onto the roof on the opposite side.
4. Line brackets up with marks on the roof. Drill one 3/16" hole in the side wall of the roof vent at the center of each slot location. Attach brackets to the vent side wall with the #8-32 screws. Place fender washers, lock washers and nuts on the inside of the roof vent side wall.
5. Close MaxxAir II and slide the two snap lock pins into place as shown. Press the snap lock pins downward to lock into position.

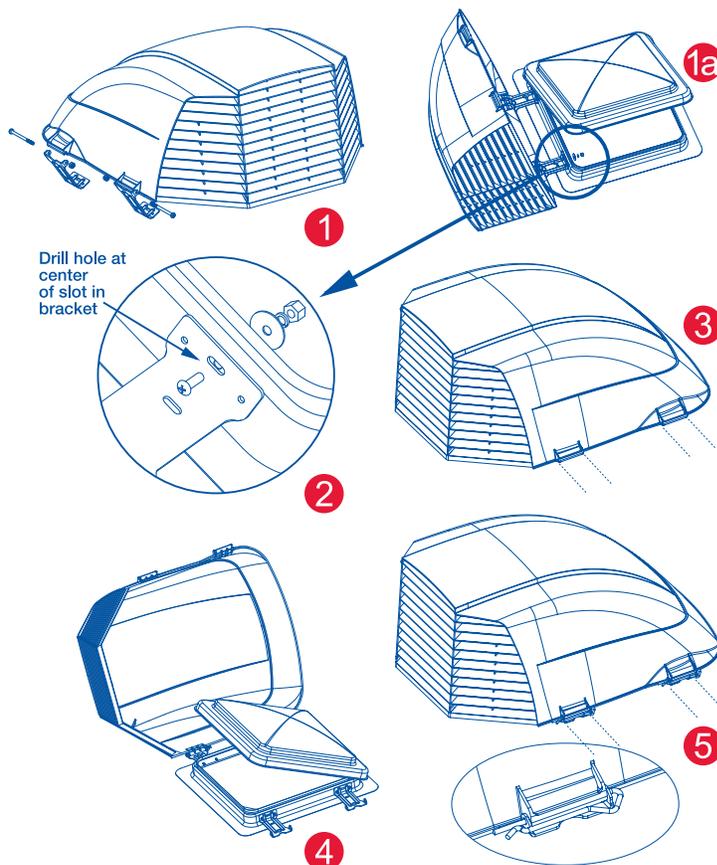

THIS CONCLUDES THE INSTALLATION.
ENJOY YOUR NEW MAXXAIR II.

CONTENTS OF KIT

- | | |
|--|--|
| 1 - MaxxAir II Vent Cover | 4 - #8-32 SS Nuts |
| 4 - Aluminum Brackets | 4 - #8 SS Lock Washers |
| 2 - Snap Lock Pins | 4 - #8 Fender Washers |
| 2 - #10-32 x 2.75" SS Screws | 8 - #6 x 1/2" SS Self-Tapping Screws (for installation over High-Powered Fans) |
| 2 - #10-32 SS Lock Nuts | |
| 4 - #8 - 32 x 1/2" SS Phil. HD Screws. | |

TOOLS REQUIRED

POWER DRILL WITH 3/16" DRILL BIT, PHILLIPS HEAD SCREWDRIVER, ADJUSTABLE WRENCH & PENCIL

SEE OUR INSTALLATION VIDEO AT www.AIRXCEL.com

* Warranty limited to repair or replacement of the MaxxAir II by MAXXAIR VENTILATION SOLUTIONS

P/N: 10-50109, REV NEW, 08-21-2013

Mounting the MAXXAIR II Over High Powered Fans Like MaxxFan Standard Fans, Fantastic Fans and ShurFlo Fans

The MAXXAIR II Vent Cover can be safely installed over high-powered RV ventilator fans, however our Fan/Mate Fan Cover specifically designed for this application allows higher air flow from your existing ventilator fan.


If you have limited space on your RV roof the MAXXAIR II Vent Cover would be a good choice to cover your high powered fan.

Follow the instructions below for installation over high powered fans. Use eight (8), #6 x 1/2" long Self-Tapping, Stainless Steel screws included in the hardware kit to complete this installation, you will not need to use the four (4), #8-32 x 1/2" screws, nuts & washers for this installation.

TOOLS REQUIRED

POWER DRILL WITH 3/32" DRILL BIT,
PHILLIPS HEAD SCREW DRIVER AND PENCIL


1. Based on your fan location, choose which side of the MaxxAir II to install the hinged brackets. Install the hinged brackets to the MaxxAir II as shown in Fig. 1. NOTE: If you are installing the MaxxAir II over a MaxxFan Standard Fan simply remove the plastic plugs from the side walls of the MaxxFan and fasten the mounting brackets into the pre-drilled holes using the #6 x 1/2 inch screws provided
2. With the louvers facing the rear of the vehicle, slide the MaxxAir II with the installed hinged brackets up to the side of your fan. Center the brackets front to back on the fan side wall. Mark both hole locations in the brackets onto the fan side wall. Move the MaxxAir II out of the way. Drill a 3/32" hole at the center of the marked holes. DO NOT drill more than 1/2" deep to avoid damaging internal wiring. Attach the brackets to the fan using two (2) #6 x 1/2" long screws per bracket.
3. Close the MaxxAir II and mark the location of the feet onto the roof on the side opposite the hinged brackets.
4. Open the MaxxAir II. Line brackets up with marks on the roof. Drill a 3/32" hole at the center of both holes in the brackets. DO NOT drill more than 1/2" deep to avoid damaging internal wiring. Attach the brackets to the fan using two (2) #6 x 1/2" long screws per bracket.
5. Close the MaxxAir II and slide the two snap lock pins into place as shown. Press the snap lock pins downward to lock into position on the bracket.

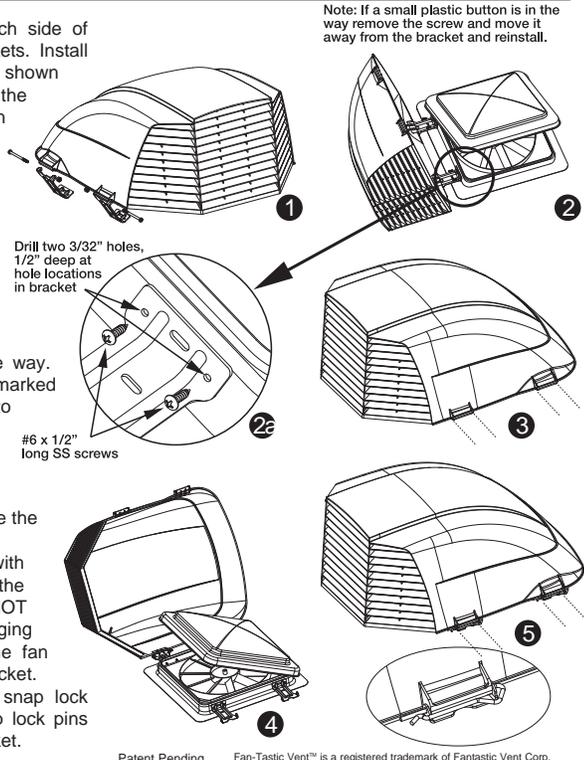

Patent Pending Fan-Tastic Vent™ is a registered trademark of Fantastic Vent Corp.


MAXXFAN® The MaxxFan Solution for RV Ventilation

MaxxFan Standard Model



- Remote control models now include backup controls at ceiling - A MaxxFan Exclusive!
- Fan runs with lid closed to circulate air (Ceiling Fan Mode)
- Lid Available in White or Smoke
- Flush mounted, easy to clean Keypad, controls fan speed, thermostat, air intake and exhaust
- Features a powerful 10-speed fan motor
- Provides over 900 Cubic feet of air per minute to keep you cool and comfortable
- Installs into all standard 14" x 14" RV roof openings
- 2-YEAR Limited WARRANTY with LIFETIME Limited WARRANTY on lid

MaxxFan Deluxe Model With Built-In Rain Cover

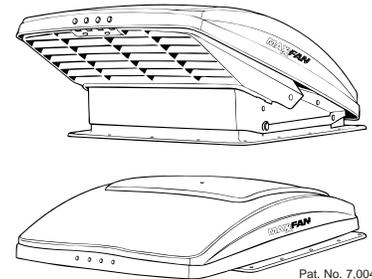

Pat. No. 7,004,832

BOTH STANDARD AND DELUXE MAXXFANS ARE AVAILABLE IN MANUAL OR REMOTE CONTROL OPENING MODELS

Standard Model

Manual Opening: P/N 00-04000K MaxxFan® White Lid

Standard Model

Electric Opening: P/N 00-04500K MaxxFan® Smoke Lid (With Remote)


Deluxe Models

Manual Opening: P/N 00-05100K MaxxFan® White Lid
P/N 00-06200K MaxxFan® Smoke Lid

Deluxe Models

Electric Opening: P/N 00-07000K MaxxFan® White Lid (With Remote)
P/N 00-07500K MaxxFan® Smoke Lid (With Remote)

MAXXAIR® The Original VENT COVER




- ▶ PROTECTS your RV interior from rain and hail
- ▶ RV America's FRESH AIR CHOICE since 1988
- ▶ Proven, super-tough one piece design
- ▶ 6-YEAR Limited WARRANTY*

P/N: 00-933066 White Vent Cover
P/N: 00-933067 Smoke Vent Cover
P/N: 00-933068 Shell White Vent Cover (Almond)
P/N: 00-933069 Black Vent Cover

FAN/MATE®

Rain Cover for High-Powered Ceiling Fans

- ▶ Model 850 (White) and Model 950 (Black) feature a 20% larger vent area for better fan performance
- ▶ Both models have a protective exhaust screen prevents debris and insects from entering into the fan area
- ▶ Both models have louvers to prevent water from entering your RV
- ▶ Both models feature HINGE OPENING MOUNTING BRACKETS that provide easy access for cleaning and servicing of your fan

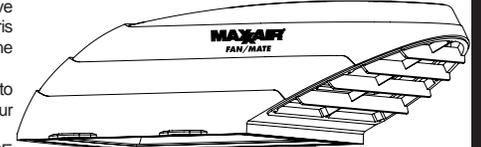

6-YEAR limited WARRANTY*

*Warranty limited to repair or replacement of the MaxxAir II by MAXXAIR VENTILATION SOLUTIONS - see website for additional information

P/N: 00-945003 Model 850 White Fan/Mate®
P/N: 00-945004 Model 950 Black Fan/Mate®

MaxxAir products are protected by U.S. Patent Nos. 7,004,832; 5,897,435; D463,541; D679,796 and other Patents Pending.

CALL YOUR DEALER FOR DETAILS

AIRXCEL, INC. - RV Products Division / MAXXAIR • 3050 N. St. Francis St. • Wichita, KS 67219 • 316-832-3400

P/N: 10-50109, REV NEW, 08-21-2013