

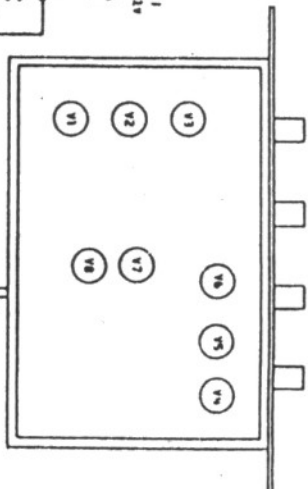


- J2 TAPE
- J3 TUNER
- J4 AUX 1
- J5 AUX 2
- J6 MONITOR INPUT
- J7 TAPE OUTPUT

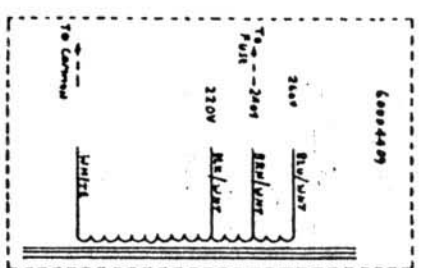

1. USE CAUTION WHEN SERVICING THE VOLTAGE COMPONENTS. CONTACT WITH STORED ENERGY EVEN WITH POWER OFF COULD BE FATAL.
2. ALL CAP IS IN: RES 1/2W 5% UNLESS NOTED.
3. RESISTOR CO. VALUES HAVE 1% OR 5% TOLERANCE UNLESS NOTED. POWER TO PREVENT CATASTROPHIC FAILURE AND POSSIBLE OSCILLATION.
4. V1 AND V2 ARE SELECTED FOR LOW NOISE AND MICROCOMPLEXES. FOR BEST SOUND RESULTS USE ONLY CECILIAN FOR V1, 2, 4, 5 AND 4000 CECILIAN 6000 FOR V3, 6.
5. REMOVE R27 FOR 10% OR 20% GAIN REDUCTION. (LOCATED ON TECHNICAL PAGES BELOW IN.)
6. R27, 4, 20W 20% 1W3%, SONIC IMPROVEMENTER AS SHOWN AND CALIBRATED BEFORE PROCEEDING.
7. R15, 5, 50C 5% 1W3%, SONIC AND STABILITY IMPROVEMENTER. C1 WAS 20 PF, R2 WAS 1.82K.

PROPRIETARY NOTICE
THE INFORMATION CONTAINED HEREIN IS
CONSIDERED PROPRIETARY AND IS FOR RESEARCH
AND DEVELOPMENT PURPOSES ONLY. IT IS NOT
TO BE RELEASED OR DISCLOSED TO THE PUBLIC
WITHOUT THE WRITTEN PERMISSION OF THE
FEDERAL BUREAU OF INVESTIGATION.

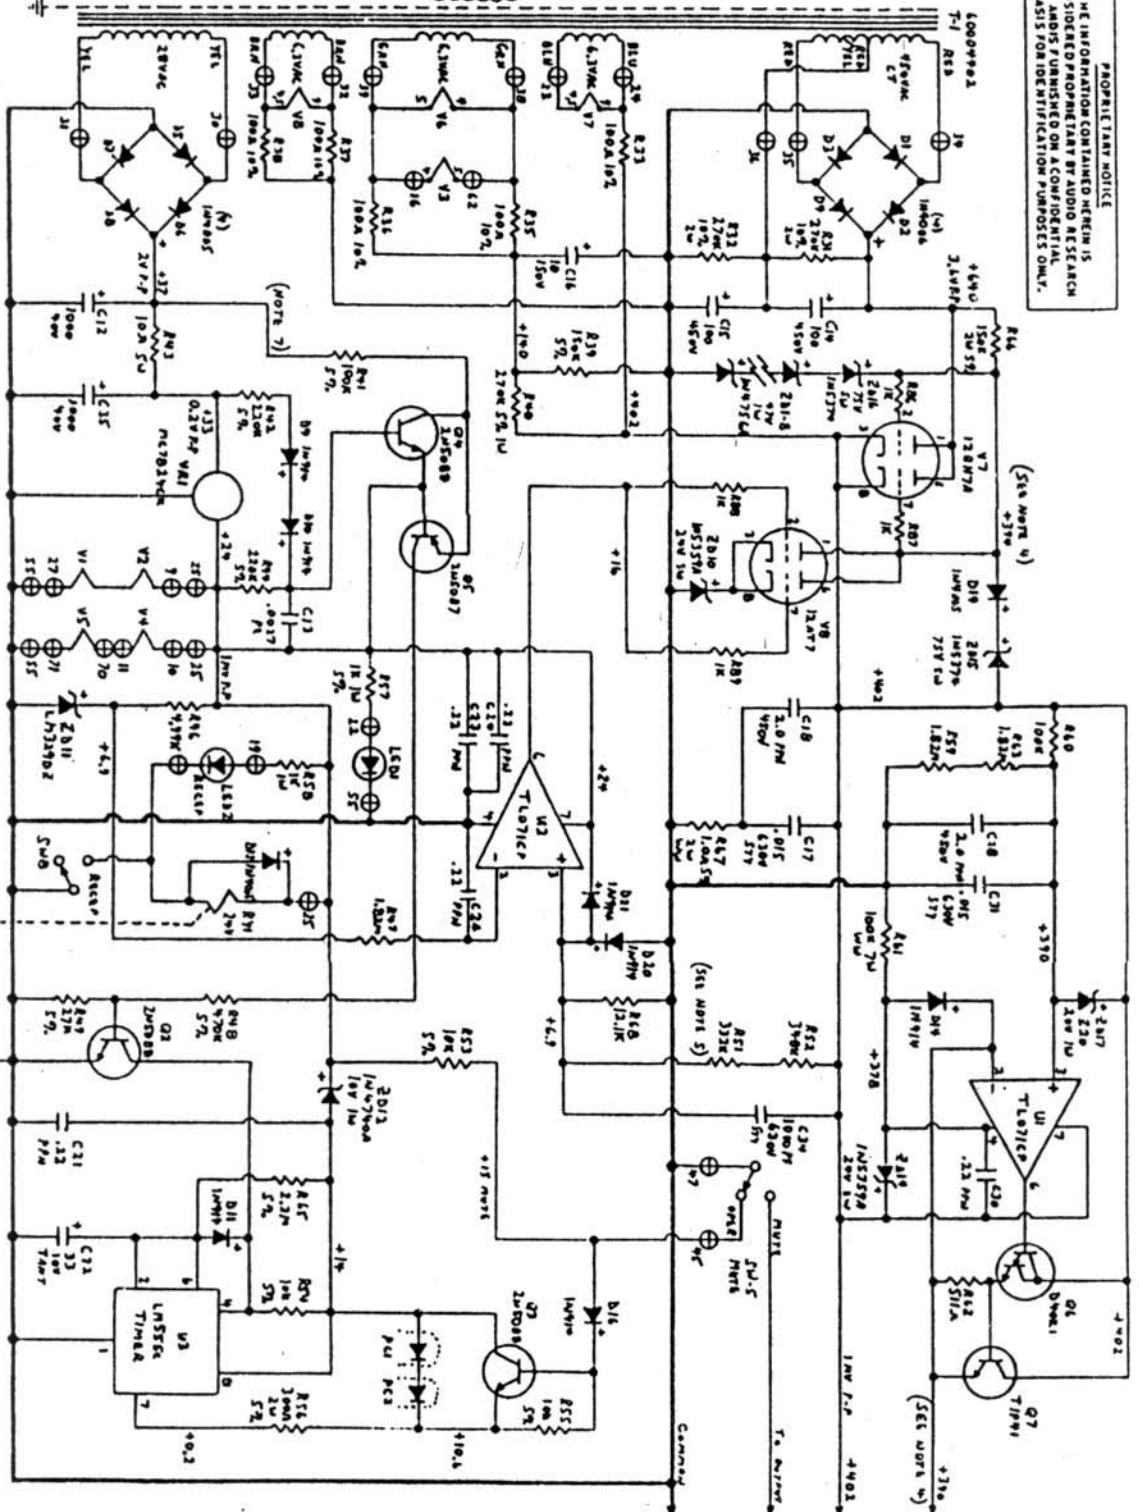

NOTES:
1. USE CAUTION WHEN SERVICING WITH POWER COMPONENTS.
2. CONTACT WITH SHOCKED COMPONENTS WITH POWER OFF COULD BE LETHAL.
3. ALL CAPS ARE 100% TESTED TO SPECIFICATION.
4. ALL CAPS ARE 100% TESTED TO SPECIFICATION.
5. ALL CAPS ARE 100% TESTED TO SPECIFICATION.
6. ALL CAPS ARE 100% TESTED TO SPECIFICATION.
7. ALL CAPS ARE 100% TESTED TO SPECIFICATION.
8. ALL CAPS ARE 100% TESTED TO SPECIFICATION.
9. ALL CAPS ARE 100% TESTED TO SPECIFICATION.
10. ALL CAPS ARE 100% TESTED TO SPECIFICATION.

9-0-10
REL
910078-10E
SP8 POWER SUPPLY