


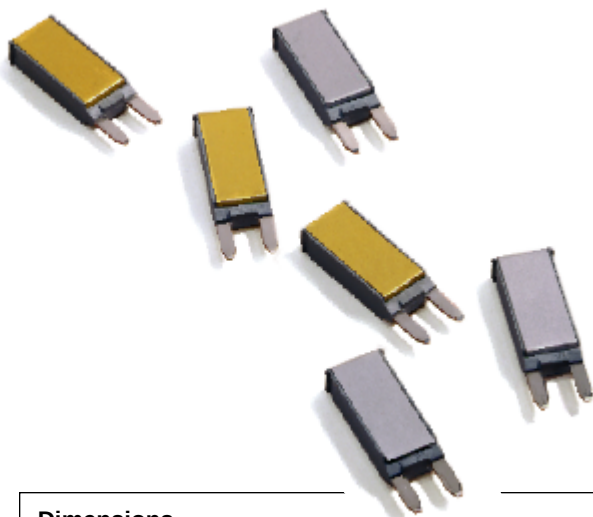

Series 21X Mini Circuit Breakers

Auto & Modified Reset

SPECIFICATIONS

Single Pole Thermal Type Breakers

Ratings: 7.5A, 10A, 15A, 20A, 25A, 30A; Voltage of 14VDC.

Operating Temperature: -40°F (-40°C) to 185°F (85°C).

Storage Temperature: -40°F (-40°C) to 260°F (125°C).


Cover: Gray 94VO Thermoplastic housing with standard gold cover (Type I) or silver cover (Type II).

Marking: Standard marking includes amp/volt ratings, part number, and date code. OCR marking available.

Termination Type: Compatible with 280 Type fuse blocks using 8.1mm centerline.

Approvals: Complies with SAE standard J553 Type I and Type II Circuit Breakers.

Dimensions

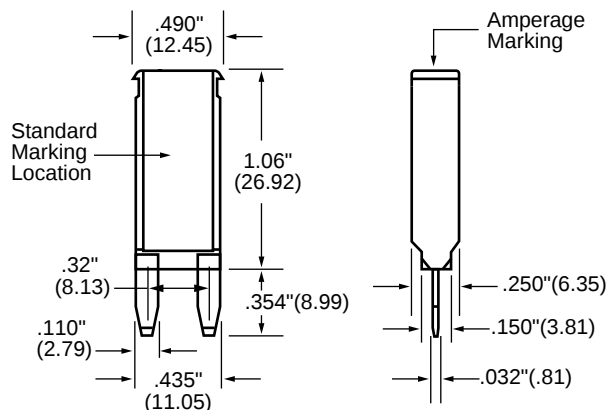


MINI Circuit Breaker Puller - Part Number 32002




See page 13 for more information.

TRIP TIME VS. PERCENT OF RATED CURRENT

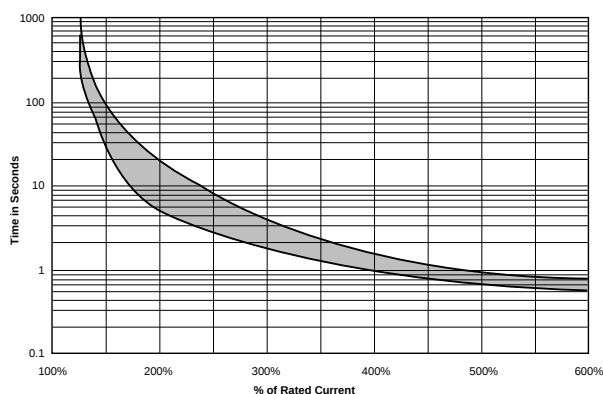

TEMPERATURE DERATING CURVES

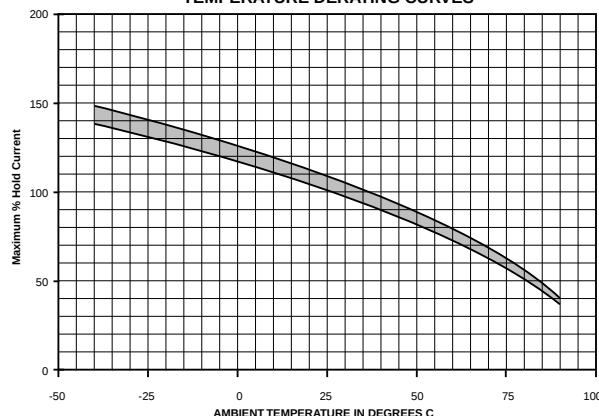

PART NUMBERING SYSTEM

Series

211 – Type I, 14VDC
212 – Type II,

Rating

7.5 – 7.5 amps
10 – 10 amps
15 – 15 amps
20 – 20 amps
25 – 25 amps
30 – 30 amps

Marking

00 – Std. Marking
(Consult Factory for Special Options)

Special Options

(Consult Factory for Special Options)