

PFP-2hpHND-M

HONDA POWERED PUMP

This pump model is the smallest and lightest pump of our line up. It's very easy to carry around and will insure that you can access any remote location. Now that's meeting your requirement!

Also available in skid version



ENGINE SPECIFICATIONS

- GXH50 Honda air cooled engine
- Single cylinder, 4-stroke gasoline engine
- Recoil start
- 0.2 gallon (0.77 l) integrated fuel tank

PUMP UNIT SPECIFICATIONS

- Direct drive C.E.T. single stage centrifugal pump
- Pump body made from resistant aluminum alloy
- Aluminum impeller
- Mechanical shaft seal
- Hand priming system; guaranteed up to 6' (2 m) lift*
- One 1 1/2" (38 mm) delivery outlet with 1/4-turn ball valve
- One 1 1/2" (38 mm) suction inlet
- Dimensions: Length: 13" (330 mm); Width: 16 1/2" (419 mm); Height: 16" (406 mm)
- Wet weight : 31 lbs (14kg)

INCLUDED ACCESSORIES


- Low oil alert.

** It is highly recommended to use a foot valve at the end of the suction hose. It will be easier to prime the pump.*

PERFORMANCE

MAX FLOW: 85 GPM
MAX PRESSURE: 60 PSI
75 GPM @ 10 PSI

55 GPM @ 25 PSI
25 GPM @ 50 PSI

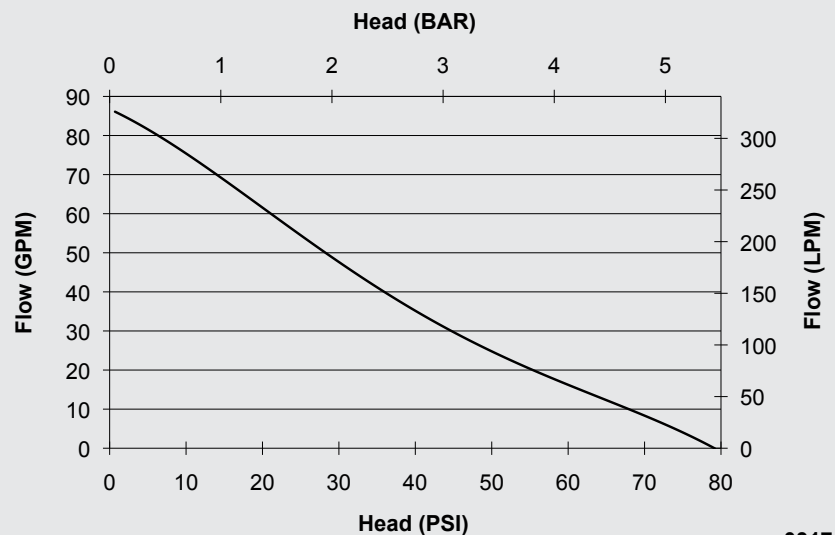


0317

LIMITED WARRANTY

- 3 YEARS for pump components
- 1 YEAR for engine components



ACCEPT ONLY THE BEST



**A CENTURY
OF ENGINEERING
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com