


P26-Series

Pushbutton Switches

PRODUCT WEBPAGE

request sample, configure part

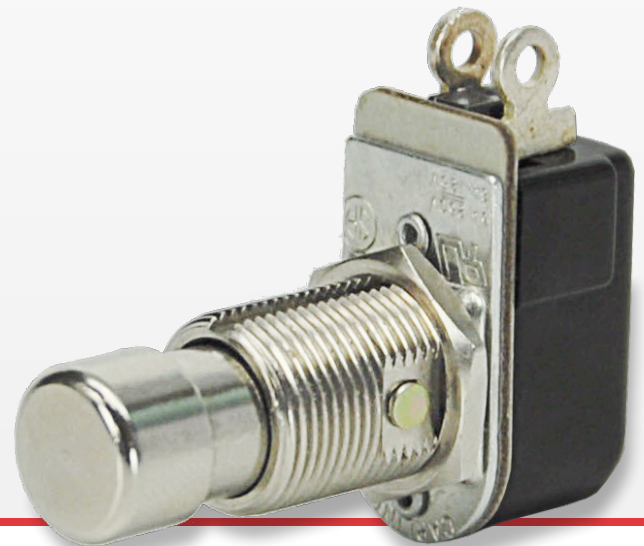

The P26-Series pushbutton switches are single pole, AC rated for 6 amps at 125 VAC and suitable for shallow back panel applications. These switches are momentary action with a medium actuation force (13 oz. typical). The P26-Series switch is equipped with a slow-make, slow-break contact mechanism.

1	3-6	125-277	125
Pole	Amps	VAC	VDC

Typical Applications

- Intercoms
- Security System
- Electronic Signs
- Marine
- Lighting

Tech Specs

Dielectric Strength

UL/CSA: 1000V - live to dead metal parts

Electrical Life

25,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

Ordering Scheme

Sample Part Number **P26L - 1D - BL**

Selection 1 2 3

1. SERIES

Single Pole	Solder Lug	.250 Tab	Wire Leads
3A 250VAC, 6A 125 VAC, 3/4A 125V	P26A	P26B	P26F
Off - (On)	P26L	-	P26T
On - (Off)			
3A 277VAC, 6A 125 VAC¹	P267A	P267B	P267F
Off - (On)	P267L	-	P267T
On - (Off)			

2. BUSHING STYLE

	length	diameter
1A	.406	.375
1B	.406	.468
1C	.465	.375
1D³	.465	.468

3. BUTTON STYLE / COLOR

BL	Black Nylon	RND MTL²	Round Metal
RD	Red Nylon	CON MTL²	Concave Metal

Notes:

- Additional ratings available. Consult factory for details
 - Only available with 1D bushing in .562 length
 - Length is .562 for RND MTL and CON MTL buttons
- () Indicates momentary function.

[Configure Complete Part Number >](#)

[Browse Standard Parts >](#)

Dimensional Specs

inches [millimeters]

