


S.M.S.L



A0200 MKII

使用说明书/USER MANUAL/取扱説明書

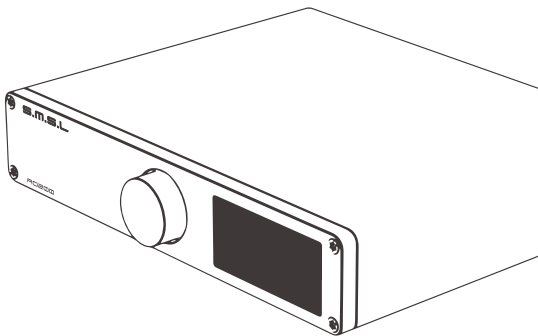

安全注意事项

- 请将本音响系统安装在通风良好、阴凉、干燥、干净的位置，远离直射阳光热源、振动、灰尘、潮湿或寒冷。
- 只能使用本机指定的电压。使用高于指定数值的电压很危险，而且可能导致火灾，损坏本机或造成人身伤害。对于使用高于指定电压造成的任何损害，我司将不负任何责任。
- 不要试图自行改造或修理本机。如果需要任何服务，请与销售或者我司客服人员联系。不管有任何理由，都没有打开机壳的必要。
- 如果打算长时间不使用本机（比如度假时），请从墙壁交流电源插座上断开电源线的连接。

重要提示：

本说明书所提到的产品规格和资讯仅供参考。如有内容更新，恕不另行通知。

保修条款

一、服务期限

佛山双木三林科技有限公司承诺产品的良好品质，产品自售出之后7天内正常使用情况下出现故障，客户可以选择退货或者保修（不影响二次销售才可退货）。正常使用一年内出现故障可以免费保修。

二、购买日期以销售商开出的购机发票或收据日期为准，网购可以交易截图为准。

三、有以下情况都不能享受“三包”服务

1. 一切人为因素损坏，包括非正常工作环境下使用或不按照说明书使用。
2. 用户私自拆机、改装、维修。
3. 使用非指定或许可的配件造成损坏的。
4. 机身的QC或保修贴损毁。
5. 不能出示有效购机凭证。
6. 不属于本公司产品。

四、保修方式为送修

此条款只适于中国大陆，其它地区请参考当地销售代理商的规定和国家法规。

产品特点

- 德国英飞凌新款数字大功率放大器芯片MA5332, 更高质的同时, 效率高, 能耗低;
- 使用了日本NJRC公司电子音量控制芯片NJW1194, 精准的音量控制和超低的失真度;
- 平衡设计, 从平衡输入到喇叭输出均为平衡, 大大降低信号传输时造成的失真;
- 内置SMSL SDB专利音效和高/低音调节功能, 轻松匹配各种喇叭和音乐;
- 具备超低音信号前级输出, 方便连接有源低音炮组成2.1系统。
- 蓝牙5.0接收, 更远的传输距离, 音质更好!
- 全铝合金CNC加工工艺, 采用阳极氧化技术, 做工精细, 触感一流;
- 彩色液晶显示屏和人性化操作系统简单易懂, 配备全功能遥控功能;
- 具备满足欧盟最新ErP2标准的低功耗待机功能;
- 大量采用发烧级音频元件以提升主观听感;
- 高品质镀金输入、输出端子;
- 完善的过热, 过流等保护电路;
- 内置高品质大功率音频专用开关电源。

技术参数


输入接口	XLR, RCA, BT, USB
THD+N	0.004%
信噪比	106dB
通道分离度	85dB
输入灵敏度/输入阻抗.....	290mV/47k Ω
输出功率	160Wx2(4 Ω) / 85Wx2(8 Ω)
消耗功率	40W(正常音量)
待机功率	0.5W
体积.....	210X41X196mm(WxHxD)
重量.....	1.6kg

规格时有变更, 恕不另行通知。

关于遥控器

- 如果遥控器距离本机很近时操作仍无效，请用新电池更换。
- 如果要长时间不使用遥控器，请取出遥控器的电池。
- 按照电池处置的地方性法规处置废旧电池。




遥控器的使用

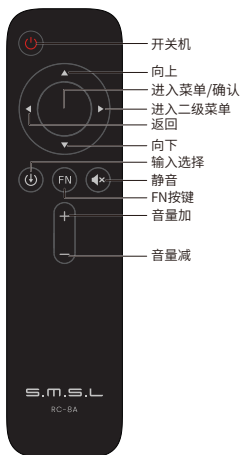

注意

遥控器请使用2节7号(AAA)电池

部件介绍

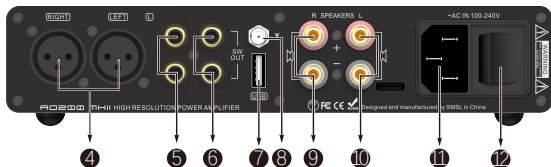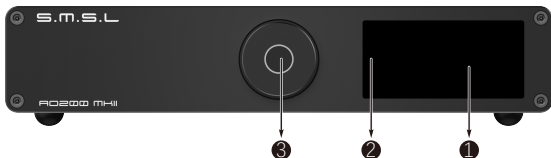


- | | | |
|--------------|---------|---------|
| 1 显示屏 | 2 红外接收窗 | 3 功能旋钮 |
| 4 平衡输入 (XLR) | 5 非平衡输入 | 6 超低音输出 |
| 7 USB输入 | 8 蓝牙天线 | 9 右声道输出 |
| 10 左声道输出 | 11 电源输入 | 12 电源开关 |

注:


连接喇叭时请注意极性, 必须按产品标注的极性, 以免影响音质。

功能介绍




有6页的设置, 屏幕如下图所示

1. INPUT (输入选择)
2. EQ (音效模式)
3. BASS (低音调整)
4. TREBLE (高音调整)
5. DIMMER (自动熄屏)
6. BRIGHTNESS (亮度)



输入菜单


1. USB
2. BALANCED (平衡输入)
3. UNBALANCED (非平衡输入)
4. BLUETOOTH (蓝牙输入)



EQ菜单

1. Direct (直通)
2. Tone (自定义)
3. SDB (SMSL专利音效)
4. Bass (低音加强音效)
5. Super Bass (低音超强音效)
6. Rock (摇滚乐音效)
7. Soft (柔和音效)
8. Clear (清晰音效)

功能介绍




低音调节范围:-10dB ~ +10dB

当EQ处于直通或其他EQ模式时, 调节低音, EQ模式会自动切换到Tone的状态



高音调节范围:-10dB ~ +10dB

当EQ处于直通或其他EQ模式时, 调节高音, EQ模式会自动切换到Tone的状态



自动熄屏:5秒 ~ 60秒

范围5秒 - 60秒, 设置后, 屏会在这个时间内自动熄灭, 遥控或者旋钮任意操作屏幕会重新点亮。



亮度调节范围:LEVEL 1~6

功能介绍

■ 蓝牙操作说明

- **连接:** 将输入源切换至蓝牙, 打开手机蓝牙功能, 搜索“**AO200MKII**”, 搜索到后点击配对连接, 当手机显示“已连接”则已连接成功。
- **重连:** 在使用蓝牙过程中, 如果失去连接, 例如: 外出, 然后回来, 有些手机不会自动重新连接, 在这个时候, **短按遥控器的蓝牙按键(FN)**就可以重新连接。
- **连接新设备: 长按遥控器的蓝牙按键(FN)**。在清除配对后, 部分手机可能会出现无法再搜索到“**AO200MKII**”, 此时需要将手机保存的蓝牙设备“**AO200MKII**”删除掉, 然后再搜索配对。

■ 恢复出厂设置

- 机器在未通电状态下, 按住开机键再通电, 直到显示屏显示文字之后, 松开按键。

AO200 MKII包装清单

- 1 × SMSL AO200 MKII
- 1 × AC电源线
- 1 × 蓝牙天线
- 1 × 遥控器
- 1 × 说明书
- 1 × 保修卡

Safety Notes

- Install this unit in a well ventilated, cool, dry, clean place-away from direct sunlight, heat sources, vibration, dust, moisture, or cold..
- Use the voltage specified on this unit Only. Using this unit with a higher voltage than specified is dangerous and may cause fire , damage to this unit, or personal injury. Our company will not be held responsible for any damage resulting from the use of this unit with a voltage other than that specified.
- Do not attempt to modify or fix this unit by yourself. Contact alesperson or customer service when any service is needed. The cabinet should never be opened for any reason.
- When not planning to use this unit for long periods of time (i.e. when going on vacation), disconnect the power cable from the AC wall outlet.

Important note:

The product specifications and information mentioned in this manual are for reference only. The content of this manual is subject to change without notice.

Warranty Terms

1.The Term of Service

Foshan Shuangmusanlin Technology Co., Ltd promises to offer good-quality products. If the product is broken in 7 days after purchasing when you use it normally, you can choose to send it back for return, replacement or repairing (only the product does not affect the second sales can be returned). Repairing for free in one year if you use it normally.

2.Date of purchase is in accordance with the date on invoice or receipt used by seller, and if you buy it on line, you can show the screenshot of trade.

3.If an inappropriate usage causes the unit damaged, the warranty will be void. As below.

- All damages by inappropriate use, including using it under non-normal working environment or without following the instructions.
- Dismantling, refitting, repairing by user in private.
- Causing damage by using some fittings instead of the designative or accredited ones.
- Cannot provide credible proof of purchase.
- The QC or warranty sticker of the body is damaged.
- Does not belong to our company's products.

4.Sending it back to our company for repairing.

5.Contact your S.M.S.L Audio reseller for a return or replacement.

Features

- New digital high-power amplifier chip MA5332 from Infineon, Germany, higher quality with high efficiency and low power consumption;
- Using NJRC's electronic volume control chip NJW1194 from Japan, precise volume control and low distortion;
- The balanced design, from input to speaker output, greatly reducing distortion caused by signal transmission;
- Built-in SMSL SDB patented sound and treble/bass adjustment for easy matching of a variety of speakers and music;
- Subwoofer pre out for 2.1 system application.
- New Bluetooth 5.0 reception, better sound quality, longer transmission distance!
- All aluminum alloy CNC precision processing shell, anodizing technology and chamfering process, exquisite workmanship and delicate touch;
- Color LCD display and user-friendly operating system are simple and easy to understand, equipped with full-featured remote control function;
- Low power standby function to meet the latest European ErP2 standard;
- A large number of professional Hi-Fi audio components are used to enhance the sound experience;
- High quality gold-plated input and output terminals;
- Perfect protection circuit for overheating, overcurrent, etc.
- Built-in high quality power supply, specially designed for audio!

Specifications


Inputs	XLR , RCA , BT , USB
THD+N	0.004%
SNR	106dB
Channel separation	85dB
Input Sensitivity / Input Impedance.....	290mV / 47k Ω
Output Power	160Wx2(4 Ω) / 85Wx2(8 Ω)
Power Consumption	40W(Normal Volume)
Standby power	0.5W
Size	210X41X196mm(WxHxD)
Weight	1.6kg

Specifications are subject to change without notice.

Remote control

- Install 2 x AAA batteries as instructions.
- When using the remote control, point it toward the remote control signal receiver on the main unit from a distance of 5 m (16 ft) or less. Do not place obstructions between the main unit and the remote control.
- The remote control might not work if the remote control signal receiver on the unit is exposed to direct sunlight or bright light. If this occurs, try moving the unit. Beware that use of this remote control could cause the unintentional operation of other devices that can be controlled by infra.




Operating the remote control

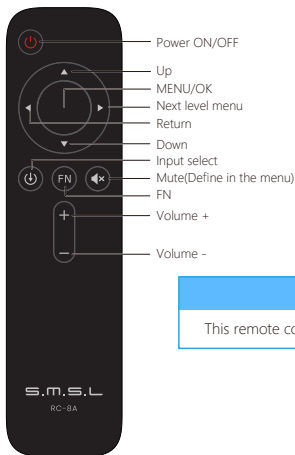

Note

This remote controller use 2 x R03/AAA batteries.

Function Introduction

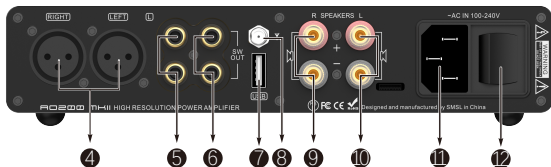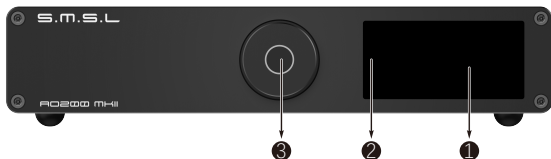


- | | | |
|-------------------------------|---------------------------------|-------------------------------|
| 1 Display | 2 Remote window | 3 Function button |
| 4 Balanced input (XLR) | 5 Unbalanced input (RCA) | 6 SW output |
| 7 USB input | 8 Bluetooth input | 9 Right channel output |
| 10 Left channel output | 11 Power input | 12 Power switch |

Note:


Please pay attention to the polarity when connecting the speakers, it must follow the mark on the unit, to avoid any effect to the sound quality.

Function Introduction




There are 6 pages of settings in this menu.

1. INPUT
2. EQ
3. BASS
4. TREBLE
5. DIMMER
6. BRIGHTNESS



INPUTS


1. USB
2. BALANCED
3. UNBALANCED
4. BLUETOOTH



EQ Setting

1. Direct
2. Tone
3. SDB
4. Bass
5. Super Bass
6. Rock
7. Soft
8. Clear

Function Introduction




Bass adjustment range: -10dB ~ +10dB

When the EQ mode is Direct or other EQ mode, changing the Bass will change the EQ to Tone mode.



Treble adjustment range: -10dB ~ +10dB

When the EQ mode is Direct or other EQ mode, changing the Treble will change the EQ to Tone mode.



DIMMER: 5second ~ 60 second

The range is 5 seconds-60 seconds. After setting, the screen will automatically go off within this time, and the screen will re-light up if you operate the remote control or the knob at any time.



Brightness Level: 1 ~ 6

Function Introduction

Bluetooth operating instructions

Connection:

- Step 1: Switch the input source in the SETTING MENU or press the Bluetooth button of the remote;
- Step 2: Turn on the Bluetooth function of the mobile phone, search for "AO200MKII", and tap to pairing. When the mobile phone displays "connected", it has been successfully connected.

Re-connection:

When you had lost the connection with the AO200 MKII, for example, going out, and back home, some phones will not re-connect the AO200 MKII if the AO200 MKII has not been re-boot, so you can **short press the Bluetooth button (FN)** on the remote to Re-connect.

Clear pairing: Long press the "Bluetooth" button(FN) on the remote control. After clearing the pairing, some phones may no longer be able to search for "AO200MKII". In this case, you need to delete the Bluetooth device "AO200MKII" which saved in the phone, and then search and pairing again.

Factory Reset

- Connect the power cord when pressing the power button, until the screen shows the logo. Then stop pressing and restart the unit.

Package list

- 1× SMSL AO200 MKII
- 1× AC cable
- 1× Bluetooth antenna
- 1× Remote control
- 1× User manual
- 1× Warranty card

安全指示

- 商品は、風通しがよく、涼しく、乾燥した清潔な場所で、直射日光や熱源から離れた場所に設置してください。直射日光、熱源、振動、ほこり、湿気、寒さを避けてください。
- 本機に指定されている電圧のみを使用してください。規定以上の電圧を使用することは危険であり、火災や本機の破損の原因となります。規定以上の電圧を使用したことによる損害については、一切の責任を負いたしません。
- ご自分で本機を改造したり修理したりしないでください。サービスが必要な場合は、セラーまたは当社のカスタマーサービスにご連絡ください。
- 長期間ご使用にならない場合(休暇中など)は、電源コードをコンセントから抜いてください。

重要なお知らせ:

このパンフレットに記載されている製品の仕様や情報は、あくまで参考情報です。内容は予告なく更新されることがあります

保証条件

一、サービス期間

S.M.S.L社は、製品の品質の良さを追求しています。通常の使用状態で販売日から7日以内に製品が故障した場合、お客様は返品または保証期間内の無料修理を選択することができます(二次販売に影響しない場合に限り返品可能)。正常な使用状態で1年以内に故障した場合は、無料修理対応いたします。

二、購入日は販売者が発行した購入請求書または領収書の日付が対象となり、オンライン購入の場合は取引画面のスクリーンショットが対象となります。

三、以下の場合は、「返品/新品交換」のサービスの対象外となります。

- 通常の作業環境以外での使用や、指示に従わない場合など、人為的な要因で生じた損害。
- ユーザーが個人的に本機を解体、改造、修理した場合。
- 指定外の付属品やライセンスされた付属品の使用によって生じた損害。
- 本体に貼られているQCシールや保証書シールが破損した場合。
- 有効な購入証明書の提示がない場合。
- 当社の製品に属さないもの。

四、保証方法は配送による

その他の地域については、お客様の販売代理店の規定および各国の規定をご参照ください。

特徴

- インフィニオンの新型デジタルハイパワーアンプチップ「MA5332」を採用し、高効率・低消費電力を実現しながら、より高品質を実現しています。
- 日本のNJRC社の電子ボリュームコントロールチップNJW1194を使用し、正確なボリューム制御と超低歪みを実現しています。
- バランスド設計で、バランスド入力からスピーカー出力まで、信号伝送による歪みを大幅に低減しています。
- 内蔵のSMSL SDB特許音響効果と高音/低音調整機能を備えており、さまざまなスピーカーや音楽に簡単に対応できます。
- サブウーファー信号プリアンプ出力が装備されており、アクティブサブウーファーを接続して2.1システムを構成するのが容易です。
- Bluetooth 5.0受信により、より長い送信距離と優れた音質を実現しています！
- 全アルミ合金CNC加工技術を使用し、陽極酸化技術を採用しており、精密な仕上げと一流のタッチを実現しています。
- カラーLCDディスプレイと使いやすいオペレーティングシステムで、理解しやすく、多機能のリモコン機能が備わっています。
- 最新のEU ErP2基準を満たす低消費電力スタンバイ機能があります。
- ゼンマイ級のオーディオ素子を大量に採用して主観を高めます
- 高音質ゴールドメッキ入出力端子を備えています。
- 完璧な過熱、過電流などの保護回路が組み込まれています。
- 高品質で高パワーなオーディオ専用スイッチング電源が内蔵されています。

技術仕様


入力コネクタ	XLR, RCA, BT, USB
THD+N	0.004%
信号対雑音比	106dB
チャンネル分離度	85dB
入力感度/入力インピーダンス.....	290mV/47k Ω
出力電力	160Wx2(4 Ω) / 85Wx2(8 Ω)
消費電力	40W(通常音量)
スタンバイパワー	0.5W
容積.....	210X41X196mm(WxHxD)
重量.....	1.6kg

仕様は予告なく変更されることがあります

リモコンについて

- リモコンを近くで操作しても動作しない場合は、新しい電池に交換してください。
- リモコンを長期間使用しない場合は、リモコンから電池を取り外してください。
- 使用済みの電池を廃棄する際は、地域の電池廃棄に関する規制に従ってください。




リモコンの使い方

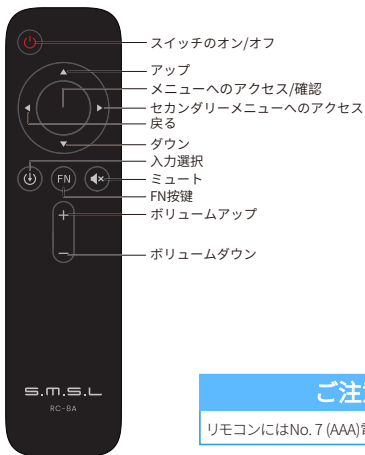

ご注意

リモコンにはNo. 7 (AAA)電池2本をご使用ください

部品紹介

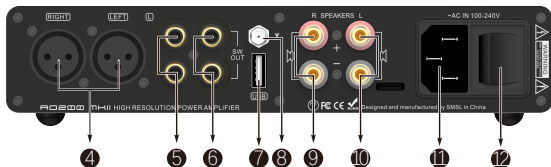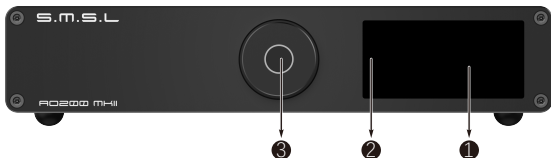


- | | | |
|---------------|-----------------|-------------|
| 1 ディスプレイ | 2 赤外線受信窓 | 3 ファンクションノブ |
| 4 バランス入力(XLR) | 5 ノンバランス入力 | 6 超低音出力 |
| 7 USB入力 | 8 Bluetoothアンテナ | 9 右チャンネル出力 |
| 10 左チャンネル出力 | 11 電源入力 | 12 電源スイッチ |

注:


スピーカーを接続する際は極性にご注意ください。音質に影響が出ないよう、必ず製品表記の極性で接続します。

機能紹介




設定項目は6ページあり、画面は以下の通り

1. INPUT (入力選択)
2. EQ (サウンドモード)
3. BASS (低音調整)
4. TREBLE (トレブル調整)
5. DIMMER (自動スクリーンオフ)
6. BRIGHTNESS (明るさ)



入力メニュー


1. USB
2. BALANCED (バランス入力)
3. UNBALANCED (アンバランス入力)
4. BLUETOOTH (Bluetooth入力)



EQメニュー

1. Direct (直通)
2. Tone (カスタム)
3. SDB (SMSL特許サウンドエフェクト)
4. Bass (ベース)
5. Super Bass (スーパーベース)
6. Rock (ロックサウンド)
7. Soft (ソフトサウンド)
8. Clear (クリアサウンド)

機能紹介




ベース調整範囲: -10dB ~ +10dB

ストレートスルーや他のEQモードでは、低音を調整するとEQモードは自動的にToneに切り替わります



トレブル調整範囲: -10dB ~ +10dB

ストレートスルーなどのEQモードでは、トレブルを調整すると、EQモードは自動的にトーンに切り替わります



オートスクリーンオフ: 5秒~60秒

5秒~60秒の範囲で、設定後、画面はこの時間内に自動的に消灯し、リモコンまたはノブで再点灯します。リモコンまたはノブを任意に操作すると、画面が再点灯します



亮度調節範囲: LEVEL 1~6

機能紹介

Bluetooth操作手順

- **接続方法:** 入力ソースをBluetoothに切り替え、携帯電話のBluetooth機能をオンにし、「AO200MKII」を検索します。検索が完了したら、ペアリング接続をクリックし、携帯電話が「接続済み」と表示されるまで待ちます。接続が成功したら完了です。
- **再接続方法:** Bluetoothを使用している途中で接続が切れた場合、例えば外出してから戻った場合、一部の携帯電話では自動的に再接続されないことがあります。その場合は、リモコンのBluetoothボタン(FN)を短押しすることで再接続できます。
- **新しいデバイスへの接続方法:** リモコンのBluetoothボタン(FN)を長押しします。ペアリングをクリアした後、一部の携帯電話では「AO200MKII」がもはや検索されない場合があります。その場合は、携帯電話上で保存する必要のあるBluetoothデバイスから「AO200MKII」を削除し、再度ペアリングを検索してください。

ファクトリーデータリセット

- 機械の電源がオフの状態、電源ボタンを長押ししてから電源を入れるまで、ディスプレイにテキストが表示されるまでボタンを離してください。

AO200 パッケージングリスト

- 1 × SMSL AO200 MKII
- 1 × AC電源ケーブル
- 1 × Bluetoothアンテナ
- 1 × リモコン
- 1 × 取扱説明書
- 1 × 保証書