



Technische Daten

Ausgangsleistung

Nennleistung 2x25 W (an 8 Ω)

Musikleistung 2x40 W (an 8 Ω).

Eingangsempfindlichkeit

Phono 2,5 mV/47 k Ω

Tuner, Aux/CD, TB/Tape 150 mV/47 k Ω

Frequenzgang

20 Hz-20 kHz

Variation der Klangsteller

Bässe ± 10 dB bei 100 Hz

Höhen ± 10 dB bei 10 kHz

Klirrfaktor $\leq 0,3\%$

Specification

Continuous power output: 20Wx2 (into 8 ohm)

Music power output: 40Wx2 (into 8 ohm)

Input sensitivity and impedance:

Phono inputs 2.5 mV/47 kohm

TUNER. AUX/CD TB/TAPE inputs 150 mV/47 kohm

Frequency response:

20 Hz-20 kHz

Tone control ranges:

Bass ± 10 dB at 100 Hz

Treble ± 10 dB at 10 kHz

Distortion factor $\leq 0.3\%$

Ruhestromeinstellung der Endstufe

Für diese Einstellung muß das Gerät mindestens 3 Minuten in Betrieb sein.

Linker Kanal: An R 788 und R 789
 $1\text{ mV} \pm 0,3\text{ mV}$ mit R 703 einstellen.

Rechter Kanal: An R 888 und R 889
 $1\text{ mV} \pm 0,3\text{ mV}$ mit R 803 einstellen.

Adjusting Quiescent Current of Output Stage

After the power switch is turned on at 3 minutes, adjust SVR 703 and SVR 803 respectively as follows.

L-Channel: SVR 703 for $1.0\text{ mV} \pm 0.3\text{ mV}$ reading between the both leads of R 788 and R 789.

R-Channel: SVR 803 for $1.0\text{ mV} \pm 0.3\text{ mV}$ reading between the both leads of R 888 and R 889.

Abgleich-Lageplan

ALIGNMENT SCHEME

PLAN DE REGLAGE


PIANO DI TARATURA

Bestückungsseite

COMPONENT SIDE

VUE DU COTE DES COMPOSANTS

LATO COMPONENTI

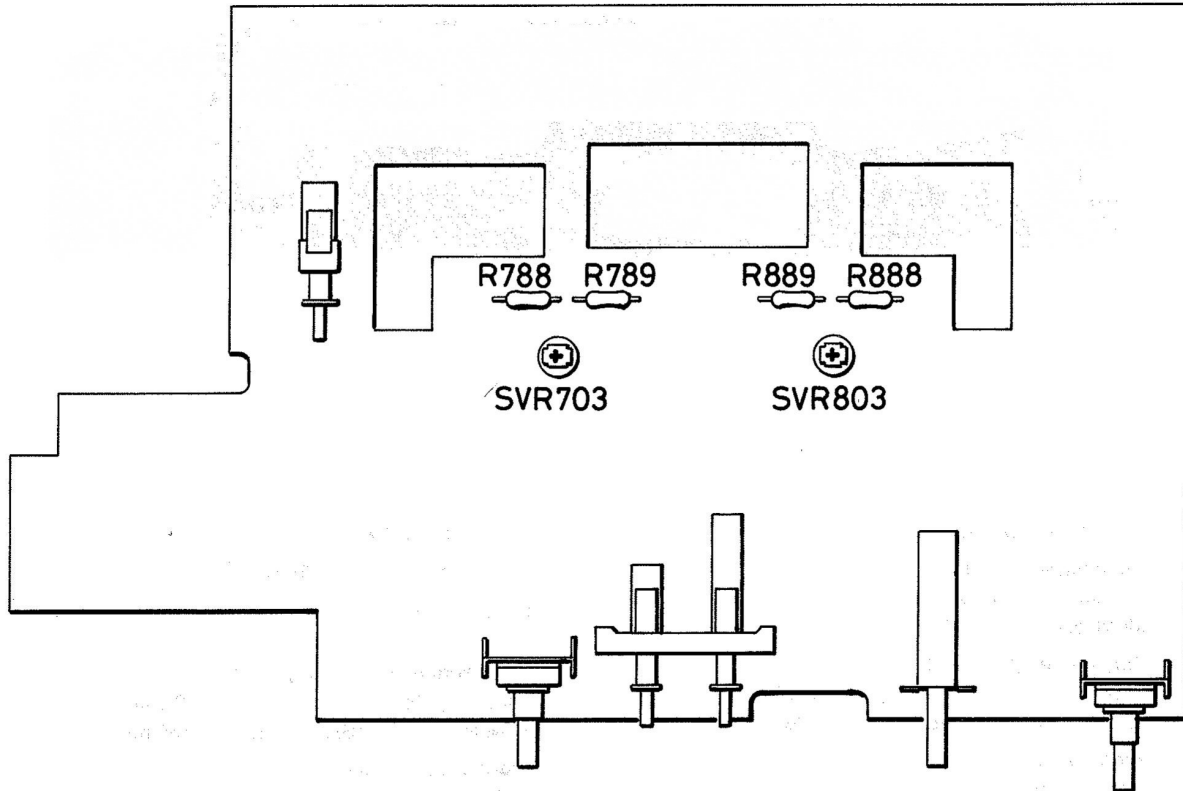

IC 701 IC702 LA6458DS

