

# WIRING DIAGRAM

DIAGRAM:

## LLWT108 LS3 SERIES

WIRING INFORMATION:

LINE VOLTAGE:


FACTORY STANDARD \_\_\_\_\_  
FACTORY OPTION \_\_\_\_\_  
FIELD INSTALLED \_\_\_\_\_

LOW VOLTAGE:

FACTORY STANDARD \_\_\_\_\_  
FACTORY OPTION \_\_\_\_\_  
FIELD INSTALLED \_\_\_\_\_

NOTES:

IF ANY OF THE ORIGINAL WIRE AS SUPPLIED WITH THE APPLIANCE MUST BE REPLACED, IT MUST BE REPLACED WITH WIRING MATERIAL HAVING THE RATING OF AT LEAST 600V 105°C

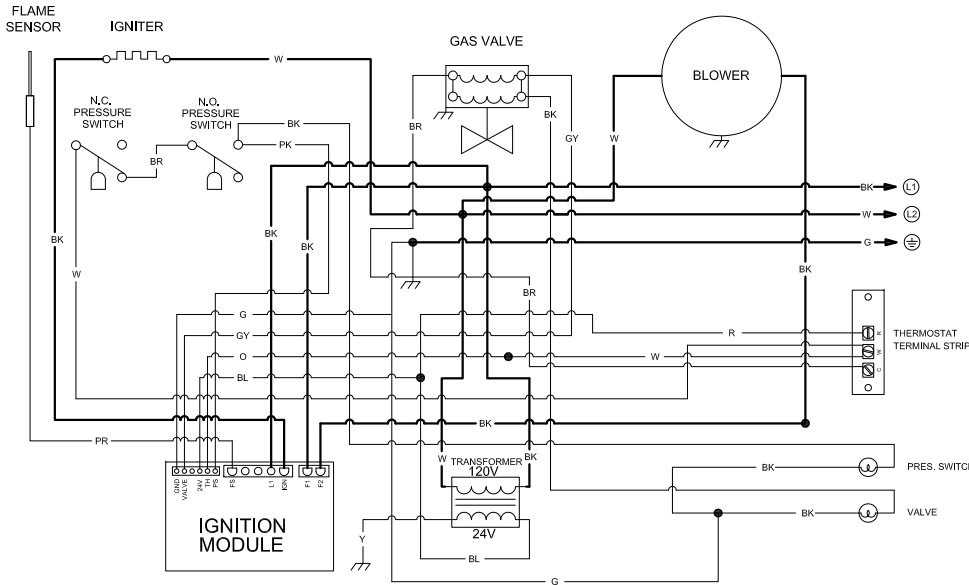

### COMPONENT CODES

⊕ EARTH GROUND	TRANSFORMER	PRESSURE SWITCH
CHASSIS GROUND	BLOWER MOTOR	S.P.S.T. RELAY
Ⓛ LINE VOLTAGE	HOT SURFACE IGNITER	INDICATOR LIGHT
Ⓜ NEUTRAL	SPARK IGNITER	GAS VALVE
● WIRE NUT	FLAME SENSOR	QUICK-CONNECT TERM.

### WIRING COLORS:

BK.....BLACK  
BN.....BROWN  
R.....RED  
O.....ORANGE  
Y.....YELLOW  
G.....GREEN  
BL.....BLUE  
PR.....PURPLE  
W.....WHITE  
GY.....GRAY

VOLTAGE:

120VAC

FREQUENCY:

60Hz

PHASE:

SINGLE

REVISION:

2

LITERATURE NUMBER:

LLWT 108-1M-08/15 (CDS)