


MODEL SP-4 AND SP-4A PREAMPLIFIER

SCHEMATIC & PARTS LIST

audio research corporation

2843 TWENTY-SIXTH AVENUE SOUTH
MINNEAPOLIS, MINNESOTA 55406

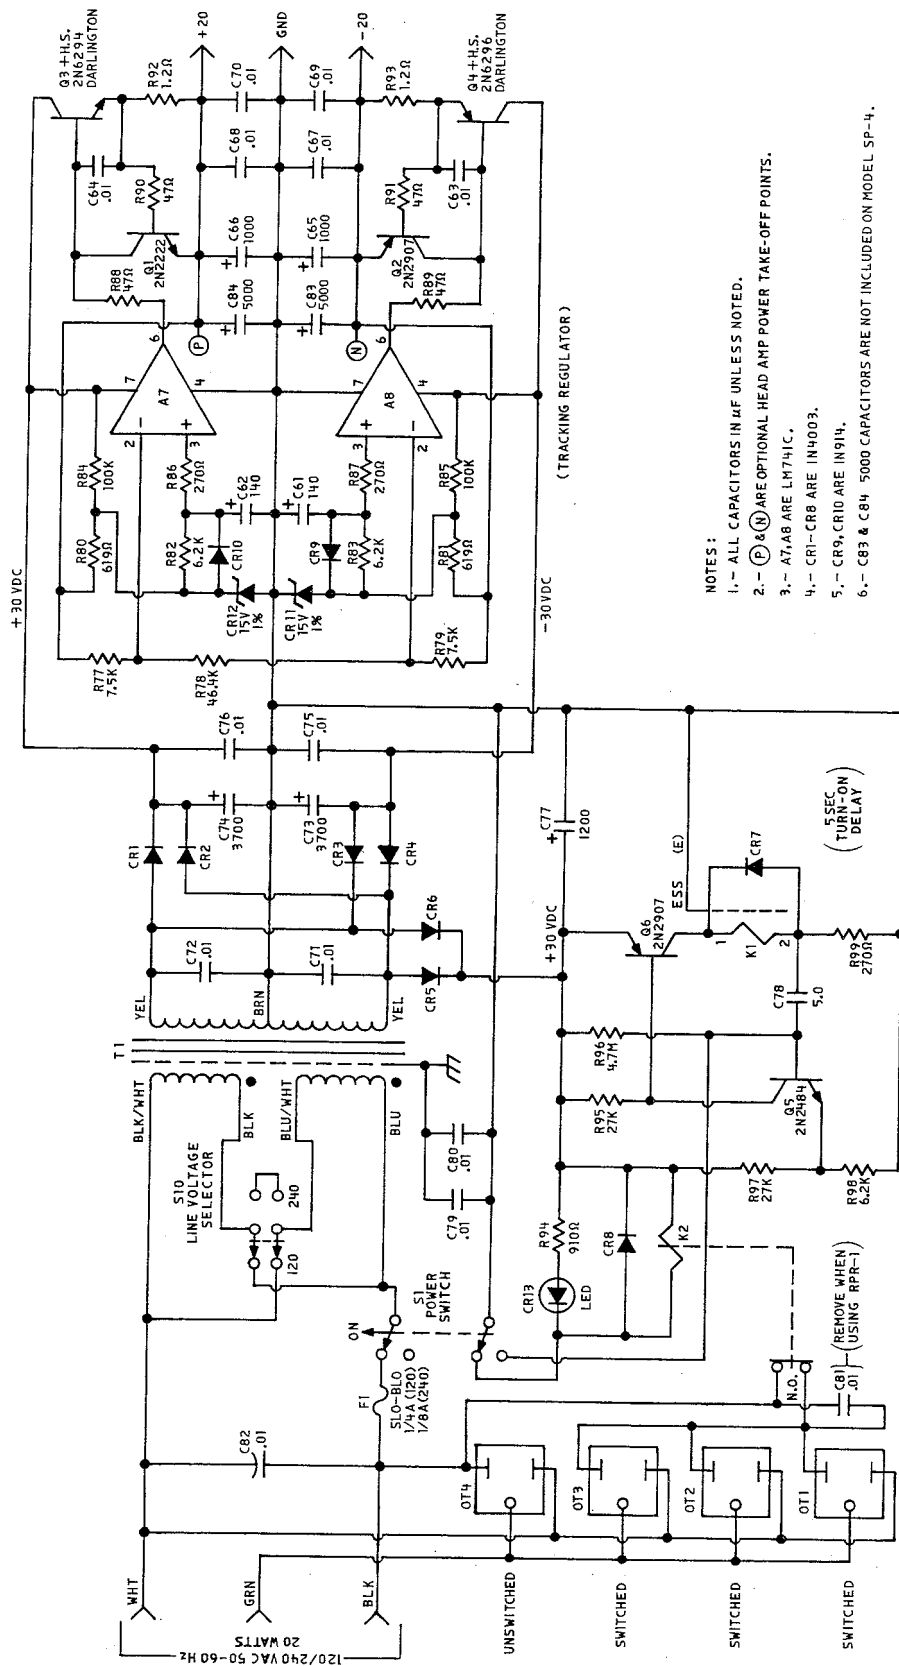

- NOTES:
- 1.- ALL CAPACITORS IN μ F UNLESS NOTED.
 - 2.- (P) & (N) ARE OPTIONAL HEAD AMP POWER TAKE-OFF POINTS.
 - 3.- A7, A8 ARE LM741C.
 - 4.- CR1-CR8 ARE IN4003.
 - 5.- CR9, CR10 ARE IN91H.
 - 6.- CR3 & C84 5000 CAPACITORS ARE NOT INCLUDED ON MODEL SP-4.

PROPRIETARY NOTICE
THIS PRINT CONTAINS PATENTED AND/OR OTHER
INFORMATION CONSIDERED PROPRIETARY OF
AUDIO RESEARCH CORPORATION AND IS FURNISHED
ON A CONFIDENTIAL BASIS FOR IDENTIFICATION
PURPOSES ONLY.

TOLERANCES UNLESS AS NOTED		AUDIO RESEARCH CORPORATION MINNEAPOLIS, MINNESOTA	
DECIMAL	SCALE	DRAWN BY	S. C.
FRACTIONAL		TITLE	APPROVED BY
ANGULAR		DATE	8-1-77
DRAWING NUMBER		SCHEMATIC SP-4 AND SP-4A POWER SUPPLY	
		910040-10 A	

SP4A PARTS LIST

COMPONENT	QUAN.	VALUE	RATING	TOL.	ARC PART NO.	COMPONENT	QUAN.	VALUE	RATING	TOL.	ARC PART NO.
A1,A2	2				AM-6	R84,R85	2	100K	1/4W	5%	41100502
A3,A4	2				AM-5	R92,R93	2	1.2 Ω	1/2W	5%	41120003
A5,A6	2				AM-4	R94	1	910 Ω	1W	5%	41910204
A7,A8	2				31000400	R95,R97	2	27K	1/4W	5%	41270402
Q1	1				30000700	R96	1	4.7M	1/4W	5%	41470602
Q2,Q6	2				30000800	R100,R101	2	Selected	1/4W	5%	41XXXX02
Q3	1				30002200	C1,2,5-8	6	150 μ F	6V	10%	51150801
Q4	1				30002300	C3,C4	2	39pF	500V	5%	57390100
Q5	1				30000600	C9-12,47-50,65,66	10	1000 μ F	25V	-10/+75%	50100903
CR1-8	8				30501700	C13,14,41-46,78	9	5.0 μ F	200V	10%	53500601
CR9,CR10	2				30500900	C15-18	4	150pF	500V	5%	57150201
CR11,CR12	2	15V	500MW	1%	30501800	C19,C20	2	.0022 μ F	200V	2%	53220301
CR13	1				34300100	C21,C22	2	.0068 μ F	200V	2%	53680301
R1	1				45100520	C23-26	4	.068 μ F	200V	2%	53680401
R2	1				45100525	C27,28,39,40	4	2.0 μ F	200V	10%	53200601
R3,R4	1				45100524	C29,30,35-38,55,56	8	10pF	500V	5%	57100100
R5-8,21,22	2				42100502	C31-34	4	300 μ F	6V	10%	51330800
R9,R10	6				42511202	C51-54	4	.015 μ F	200V	2%	53150402
R11-16,53-60,88-91	2				41470102	C57-60	4	.0018 μ F	200V	2%	53180301
R17,18,61-68	10				41100602	C61,C62	2	140 μ F	40V	-10/+75%	50140801
R19,20,86,87,99	5				41270202	C63,64,67-72,75,	12	.01 μ F	500V	20%	52100402
R23-26	4				42750502	76,79,80	2	3700 μ F	40V	-10/+75%	50370901
R27-30,39,40	6				41220702	C73,C74	1	1200 μ F	40V	-10/+75%	50120901
R31,R32	2				42100302	C77	2	.01 μ F	1600V	10%	53100403
R33,R34	2				42487402	C81,C82	2	5000 μ F	25V		50500900
R35,R36	2				42121402	C83,C84	1	$\frac{1}{2}$ A S.B.	250V		34500100
R37,R38	2				41100102	F1	1				60003201
R41,R42	2				42121502	T1	1				23200500
R43,R44	2				41270303	OT1-OT4	4				24100700
R45-48	4				42162502	S1	1				24100400
R49-52,77,79	6				42750302	S2-7	6				24000700
R69-74	6				42422402	S8	1				24000800
R75,R76	2				42511402	S9	1				24100600
R78	1				42464402	S10	1				64100200
R80,R81	2				42619202	K1	1	1750 Ω	24VDC		64100300
R82,83,98	3				41620302	K2	1	290 Ω	24VDC		23201000
						J1-22	22				