GEBRUIKSAANWIJZING VOOR PRELUDE 2 x 5 WATT.

INSTALLATIE

Plastic stofkap afnemen. Transportschroeven van de platenspeler losdraaien. Pick-up arm uitbalanceren. Vereiste naalddruk instellen. Netsnoer op het lichtnet aansluiten.

De luidsprekerboxen (Impedantie 4 Ohm) dienen d.m.v. bijgeleverde luidsprekersnoeren zodanig op de luidsprekerpluggen R en L te worden aangesloten, dat de links opgestelde luidspreker met de plug L verbonden is.

BEDIENING

Voor bediening platenspeler- c.q. wisselaar zie bijgevoegde instructie.
Met de knop "ON-OFF" apparaat inschakelen.
Met de knop "VOLUME" geluidssterkte regelen.
De "BALANCE" knop zodanig instellen, dat vanuit Uw luisterpositie, de geluidssterkte uit beide luidsprekers gelijk is.
Lage en hoge tonenregeling kan geschieden met resp. de "BASS" en "HIGH" knop.

Garrard S.P.20
SINGLE RECORD PLAYER

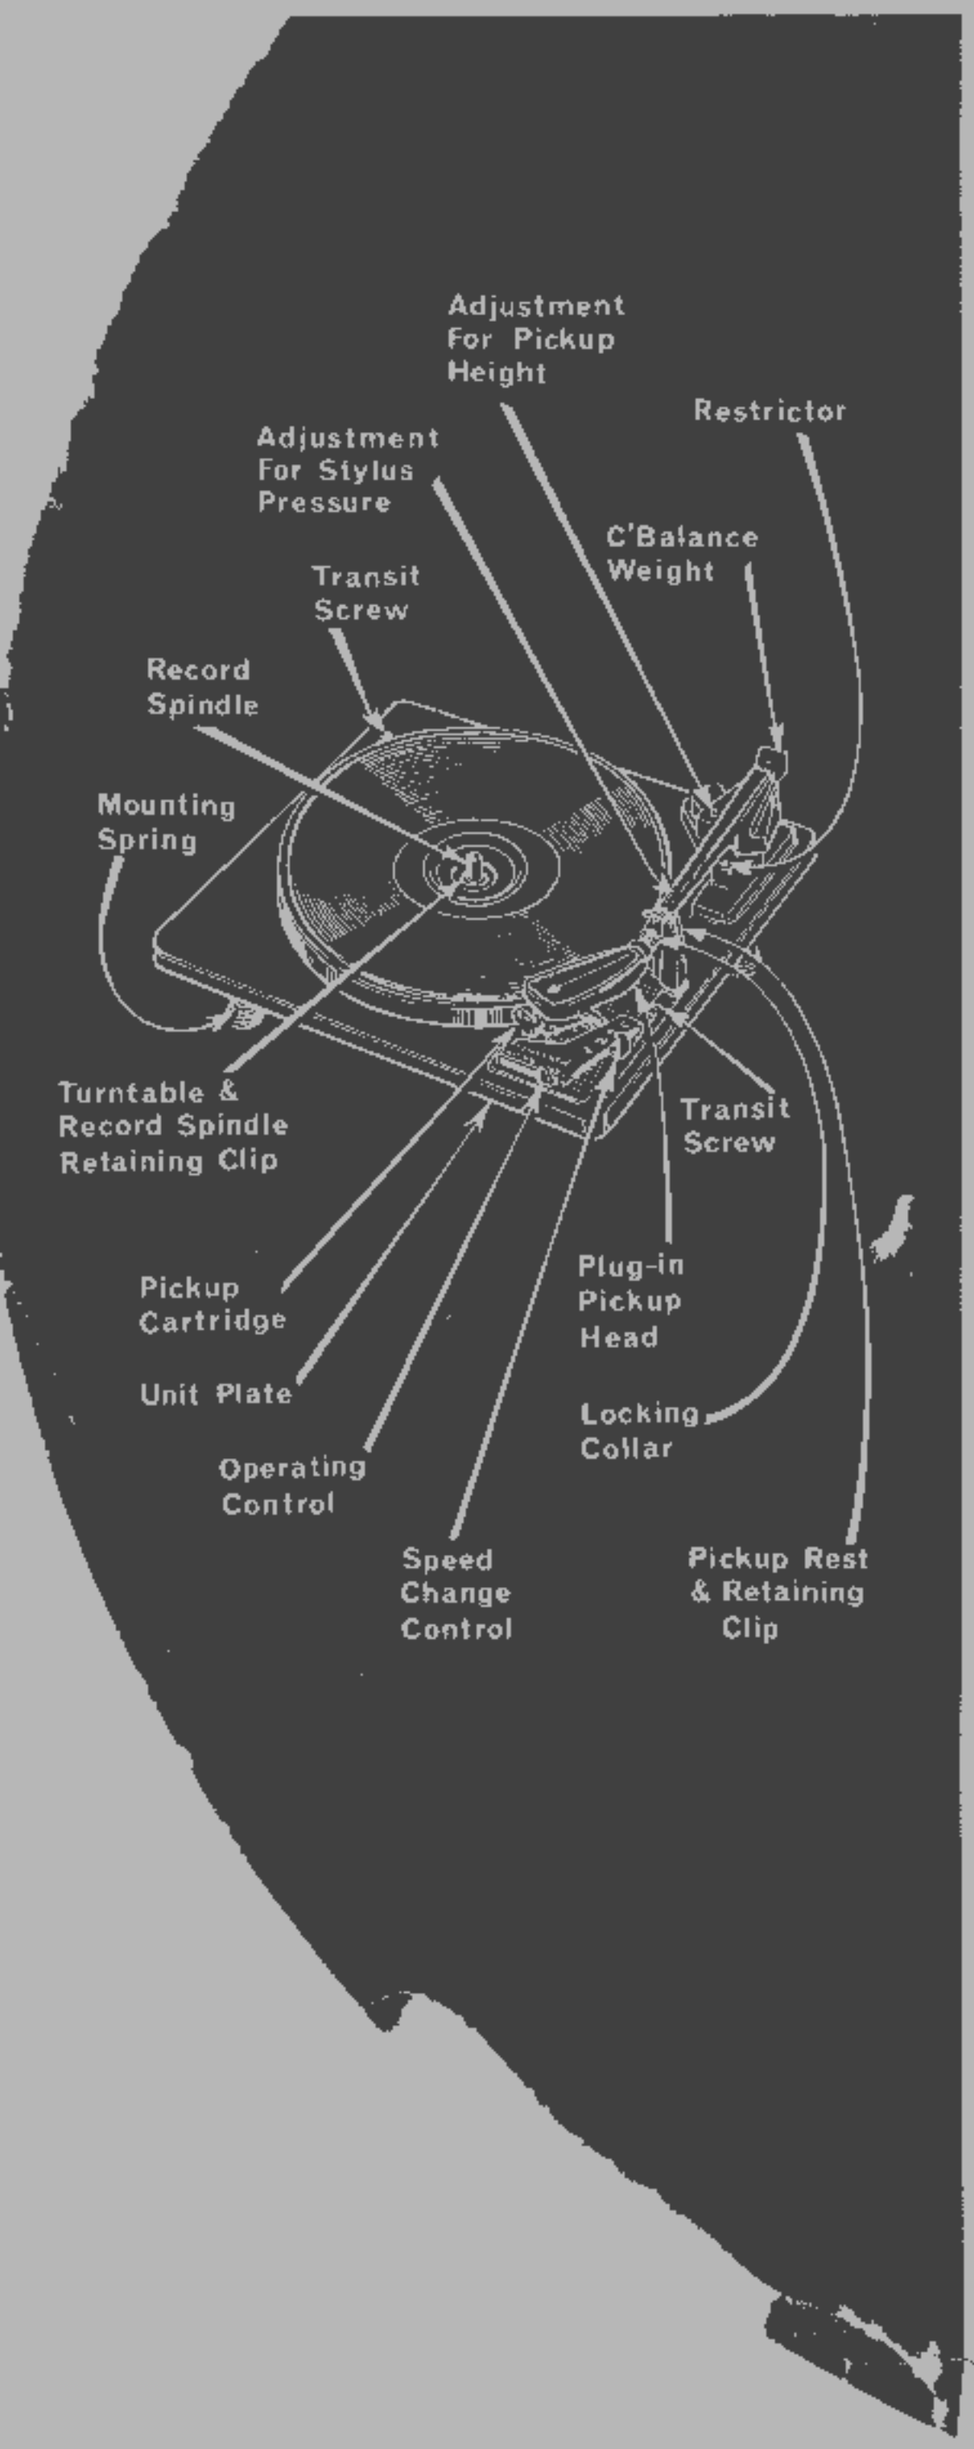

This compact, modern 4 speed record player has been styled by leading designers and engineered to a high standard of performance and reliability.

Before operation, check that both transit screws are turned fully clockwise allowing the unit to float freely on its springs.

OPERATION

1. Check correct stylus setting.
2. Check correct speed control setting.
3. Place record on turntable and release pickup from rest.
4. Move operating control to PLAY.
5. Place pickup on record.
   After playing record, pickup returns to rest and motor switches off.

TO REJECT a record being played, move control to REJECT. Pickup will then lift, return to rest and motor will switch off.

TO STOP motor, with pickup remaining on record, move control to OFF. Restart by moving control to PLAY.
45 r.p.m. records with large centre holes can be played by fitting the special adaptor provided.

Note: Store and clean records as recommended by their manufacturers.

Before transporting, tighten transit screws counterclockwise and clip pickup arm on rest.

See reverse side for Maintenance

Garrard

S.P.20

MAINTENANCE

LUBRICATION of motor, turntable spindle and rubber intermediate wheel bearings is rarely needed, as they are oil-retaining but, when necessary, remove turntable and apply thin, machine oil sparingly. Remove all surplus oil with clean, dry cloth — especially from motor pulley, intermediate wheel and inside turntable rim.

TO REMOVE TURNTABLE, pull out record spindle and remove retaining clip, noting its position for correct reassembly. Lift turntable by applying equal pressure on opposite sides.

STYLUS must be kept clean and replaced when worn.

TO REMOVE PICKUP HEAD, turn its locking collar fully clockwise and withdraw.

ADJUSTMENTS

PICKUP LIFTING HEIGHT is factory-set but is adjustable by turning a screw near back of pickup arm — clockwise to decrease and counterclockwise to increase it. Pickup arm must clear front of its rest by $\frac{1}{32}$" on return. Switch off at this time to measure and adjust.

STYLUS PRESSURE is adjusted by turning knurled nut under pickup arm clockwise to reduce and counterclockwise to increase it. If pickup arm lift restrictor blade is fitted, turn it outwards to release before adjusting pressure. If you need any assistance, please contact your dealer.

Available as optional accessories are — the Garrard Stylus Pressure Gauge for checking stylus pressure; attractively styled wood base; protective dust cover. These items are obtainable through your Garrard Dealer.

For technical information or spare parts write:

U.S.A.

Garrard Sales Corporation,
Westbury, New York 11591.

United Kingdom
(or other territories)

Garrard Engineering Limited,
Newcastle Street, SWINDON, Wilts, England.

Service and Spares Department,
50-54 Radnor Street, SWINDON, Wilts, England.
Telephone No.: SWINDON 22606.

Printed in England
71934/01
11/65