




Front View



Side View

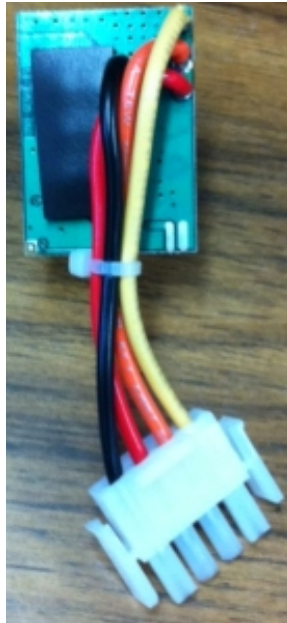

Back View



Potential  
Customer Install

## **FEATURES:**

1. Works with Incandescent or LED lights.
2. 10 amp Current Rating
3. Function:
  - a. Touching Off (The bottom side of the Switch) turns the lights off. Dimmer has a soft off feature which does not just turn the lights off, but dims to off in about 1 second.
  - b. Touching On "resumes" or turns the lights back to the previous brightness state. (Note: disconnecting battery resets level to full bright)
  - c. Holding Off, slowly dims the light to a minimum 5% brightness state.
  - d. Holding On, slowly brightens the light to 100%.

## **SPECIFICATIONS:**

1. Female contacts on Dimmer Assembly to mate to the back of a Momentary Up and Down, Center Off, Rocker Switch, SPDT (Sigma 201F-12 Rocker switch.)
  - a. J3 Common
  - b. J2 On-Bright
  - c. J1 Off-Dim
2. Harness Connector to Plug and Play with Existing Harness:
  - a. 4 Pin Amp Mate-N-Lok Plug # 1-480702-0
  - b. Amp Socket Contacts #350536-1 or equivalent
  - c. Connector Pin-Out
    - 1 - Chassis Ground (-)
    - 2 - +12V Power (+)
    - 3 - Light (+)
    - 4 - Light (-)
3. Current Rating 10amps, must be fused with 20amp Fuse.