

**CUSTOMER ORDER SPECIFICATION FOR HALE 30FS-M FIRE PUMP**

Customer Name: \_\_\_\_\_ Customer P.O. NO.: \_\_\_\_\_  
 Order Prepared By: \_\_\_\_\_ Hale Customer NO.: \_\_\_\_\_ Date: \_\_\_\_\_  
 Fire Dept. Name: \_\_\_\_\_ City: \_\_\_\_\_ State: \_\_\_\_\_  
 Requested Delivery Date: \_\_\_\_\_  
 Max. Elevation for Pump Test: \_\_\_\_\_ FT Panel Width: \_\_\_\_\_ IN.  
 Reference Specifications: \_\_\_\_\_

Engine: Mfr: \_\_\_\_\_ Model: \_\_\_\_\_ Horsepower: \_\_\_\_\_ @ \_\_\_\_\_ RPM  
 Full Load Governed RPM: \_\_\_\_\_ Peak Torque: \_\_\_\_\_ LB/FT @ \_\_\_\_\_ RPM  
 Application confirmed with : \_\_\_\_\_

**1. Pump Model:**

PUMP MODEL	Price	Material
30FS(X)-M	\$4,243	Cast Iron
30FS(X)-M	CONSULT FACTORY	Bronze

NOTE: (X) Indicates Ratio Selected Below

**2. Pump Test Certificate Options Available**

- None **N/C**
- Provided **\$575**
- Dual Rating (US GPM/LPM) **\$775**

**3. Pump Ratio (Circle Desired Model): N/C**

RATIO	MODEL
2.00	30FS2-M
2.83	30FS3-M
3.94	30FS4-M
4.93	30FS5-M

**NOTE: Engine Application data and compatibility is the responsibility of the purchaser.**

**4A. Flywheel Housing Options (Check one box):**

- Direct Mount to SAE #4 or #5 Flywheel Housing **N/C**

**4B. Drive Disc, 1-3/8 x 10 Spline**

- SAE #7-1/2 Elastomeric (005-0060-03-0) **\$2925**
- SAE #8 Spring **\$2425**
- SAE #10 Spring **\$ 270**
- SAE #11-1/2 Spring **\$ 270**
- SAE #6-1/2 Elastomeric **\$2400**
- SAE #10 Elastomeric **\$ 966**
- SAE #11-1/2 Elastomeric **\$ 966**

Note: Spring drive disc are for gasoline or 2-cycle diesel engines only. elastomeric Disc requires a SAE #4 engine bell housing

**5. Gearbox Cooler (Check One Box):**

- NONE **N/C**
- PROVIDED **\$275**

**6. Anode**


- NONE **N/C**
- Suction & Discharge (recommended) **\$ 80**

SAE FLYWHEEL DIMENSIONS						
		11-1/2 CLUTCH	10 CLUTCH	8 CLUTCH	7-1/2 CLUTCH	6-1/2 CLUTCH
A	NO.	8 EQUAL SPACE	8 EQUAL SPACE	8 EQUAL SPACE	8 EQUAL SPACE	6 EQUAL SPACE
	SIZE	3/8 - 16	3/8 - 16	3/8 - 16	5/16 - 18	5/16 - 18
B		13.125	11.625	9.625	8.750	7.875
C		13.875	12.375	10.375	9.500	8.500
D		1.56	2.12	2.44	1.19	1.19


SAE FLYWHEEL HOUSING DIMENSIONS			
		NO. 4	NO. 5
E	NO.	12	8
	SIZE	3/8 - 16	3/8 - 16
F		14.25	12.375
G		15.00	13.125

NOTE: Flywheel and bell housing must conform to SAE standards to ensure proper fit and function.

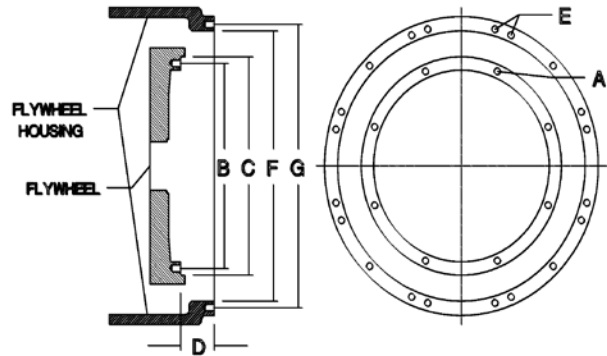

**VOLUTE POSITION (Circle Volute Position Desired)**

SPECIFY ON ORDER THE DISCHARGE POSITION DESIRED. WHEN DISCHARGE POSITION IS NOT SPECIFIED ON ORDER POSITION NO. 1 WILL BE SHIPPED

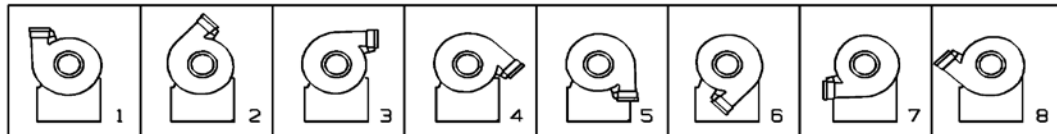

Hale Products, Inc. A Unit of IDEX Corp. 700 Spring Mill Avenue Conshohocken, PA 19428 USA  
 TEL: 610/825-6300 1-800/220-HALE FAX: 610/825-9615 www.haleproducts.com

Class 1 A Unit of IDEX Corp. 607 NW 27th Avenue Ocala FL 34475 USA  
 Tel: 352-629-5020 800-533-3569 Fax: 352-629-2902 www.class1.com

NOTE: Hale reserves the right to make improvements in design and materials and changes in price without notice  
 ALL PRICES ARE U.S. DOLLARS F.O.B. CONSHOCKEN, PA 19428 USA