

CUSTOMER ORDER SPECIFICATION FOR HALE 60FB FIRE PUMP END

Customer Name: _____ Customer P.O. NO.: _____
 Order Prepared By: _____ Hale Customer NO.: _____ Date: _____
 Fire Dept. Name: _____ City: _____ State: _____
 Requested Delivery Date: _____ Max. Elevation for Pump Test: _____ FT
 Reference Specifications: _____

Engine: Mfr: _____ Model: _____ Horsepower: _____ @ _____ RPM
 Full Load Governed RPM: _____ Peak Torque: _____ LB/FT @ _____ RPM
 Application confirmed with: (for applications not on list) _____

1. Pump Model (Circle price of Model Desired):

FLOW GPM (LPM)	1000 (4000)	1250 (5000)	1500 (N/A)	Material
60FB0-M	\$6,640	\$6,640	\$6,640	Cast Iron
60FB1-M	\$6,240	\$6,240	\$6,240	Cast Iron
60FB0-M	CONSULT FACTORY			Bronze
60FB1-M	CONSULT FACTORY			Bronze

2. Discharge Position: (Check One Box)

- Up STD
- Left \$ 250
- Right \$ 250
- Down \$ 250
- Position for Check Valve \$ 250

3A Direct Mount

- Direct Mount SAE #3 or #4 N/C
- Flywheel Housing N/C

3B Drive Disc, 1-3/8 x 10 Spline

- Adapter SAE #3 to SAE #2 \$3518
- SAE #10 Spring \$ 276
- SAE #11-1/2 Spring \$ 276
- SAE #10 Elastomeric \$ 966
- SAE #11-1/2 Elastomeric \$ 966


Note: Spring drive disc are for gasoline or 2-cycle diesel engines only

4. Suction Ends: (Check One Box)

- None (6 x 11 ASA FLANGE) N/C
- 6 inch NPTF Flange Cast Iron \$ 276
- 6 inch NPTF Flange (Stainless) \$ 820

5. Discharge End (Check One Box):

- None (4 X 9 ASA FLANGE) N/C
 - 4 inch NPTF Flange(Cast Iron) \$ 250
 - 4 inch NPTF Flange (Stainless) \$ 320
 - 4 INCH WELD FLANGE (Stainless) \$ 510
 - 4 inch NPTF Check Valve (Cast Iron) \$1890
- (Requires special 45° position)

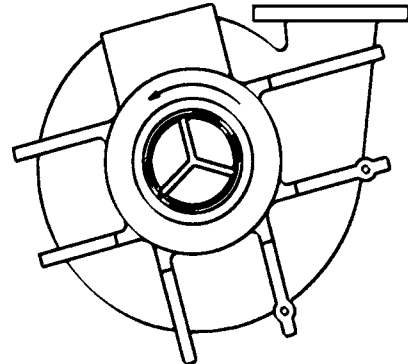


NOTE: Engine Application data and compatibility is the responsibility of the purchaser.

SAE FLYWHEEL DIMENSIONS				
		11-1/2 CLUTCH	10 CLUTCH	
A	NO.	8 EQUAL SPACE	8 EQUAL SPACE	
	SIZE	3/8 - 16	3/8 - 16	
B		13.125	11.625	
C		13.875	12.375	
D		1.56	2.12	

SAE FLYWHEEL HOUSING DIMENSIONS				
		NO. 2	NO. 3	NO. 4
E	NO.	12	12	12
	SIZE	3/8 - 16	3/8 - 16	3/8 - 16
F		17.625	16.125	14.125
G		18.375	16.875	15.00

NOTE: Flywheel and bell housing must conform to SAE standards to ensure proper fit and function.

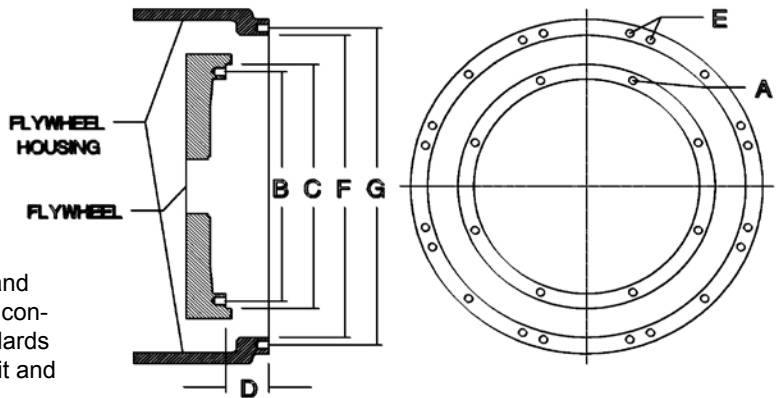

Hale Products, Inc. A Unit of IDEX Corp. 700 Spring Mill Avenue Conshohocken, PA 19428 USA
 TEL: 610/825-6300 1-800/220-HALE FAX: 610/825-9615 www.haleproducts.com
 Class 1 A Unit of IDEX Corp. 607 NW 27th Avenue Ocala FL 34475 USA
 Tel: 352-629-5020 800-533-3569 Fax: 352-629-2902 www.class1.com

NOTE: Hale reserves the right to make improvements in design and materials and changes in price without notice
 ALL PRICES ARE U.S. DOLLARS F.O.B. CONSHOHOCKEN, PA 19428 USA
 Bulletin 919-2009, Sheet 1 of 1, © 2009 Hale Products Inc, Printed in USA