

**CUSTOMER ORDER SPECIFICATION FOR HALE 60FJ FIRE PUMP END**

Customer Name: \_\_\_\_\_ Customer P.O. NO.: \_\_\_\_\_  
 Order Prepared By: \_\_\_\_\_ Hale Customer NO.: \_\_\_\_\_ Date: \_\_\_\_\_  
 Fire Dept. Name: \_\_\_\_\_ City: \_\_\_\_\_ State: \_\_\_\_\_  
 Requested Delivery Date: \_\_\_\_\_ Max. Elevation for Pump Test: \_\_\_\_\_ FT  
 Reference Specifications: \_\_\_\_\_

Engine: Mfr: \_\_\_\_\_ Model: \_\_\_\_\_ Horsepower: \_\_\_\_\_ @ \_\_\_\_\_ RPM  
 Full Load Governed RPM: \_\_\_\_\_ Peak Torque: \_\_\_\_\_ LB/FT @ \_\_\_\_\_ RPM  
 Application confirmed with: (for applications not on list) \_\_\_\_\_

**1. Pump Model (Circle price of Model Desired):**

FLOW GPM (LPM)	750 (3000)	1000 (4000)	1250 (5000)	Material
60FJ4-M	\$9,367	\$9,367	\$9,367	Cast Iron
60FJ5-M	\$8,967	\$8,967	\$8,967	Cast Iron
60FJ4-M	CONSULT FACTORY			Bronze
60FJ5-M	CONSULT FACTORY			Bronze

**2. Discharge Position: (Check One Box)**

- Up **STD**
- Left \$ 250
- Right \$ 250
- Down \$ 250
- Position for Check Valve (45° clockwise) \$ 250

**3A. (Check One Box)**

- Direct Mount SAE #3 or #4 Flywheel Housing **N/C**
- Adapter SAE #3 to SAE #2 \$3518

**3B Direct Drive 2 x 10 Spline**

- SAE #10 Spring \$ 900
- SAE#11-1/2 Spring \$ 900
- SAE#10 Elastomer \$1796
- SAE #11-1/2 Elastomeric \$1796


Note: Spring drive disc are for gasoline or 2-cycle diesel engines only

**4. Suction Ends: (Check One Box)**

- None (6 x 11 ASA Flange) **N/C**
- 6 inch NPTF Flange (Cast Iron) \$ 270
- 6 inch NPTF Flange (Stainless) \$ 820

**5. Discharge End (Check One Box):**

- None (4 X 9 ASA FLANGE) **N/C**
- 4 Inch NPTF Flange (Cast Iron) \$ 250
- 4 Inch NPTF Flange (Stainless) \$ 326
- 4 INCH WELD FLANGE (Stainless) \$ 510
- 4 Inch NPTF Check Valve (Cast Iron) \$1890




**NOTE: Engine Application data and compatibility is the responsibility of the purchaser.**

**FOR ADDITIONAL OR LOOSE ACCESSORIES, VALVES, FLANGES, SEE SEPARATE ACCESSORY PAGE PRICE LIST AND ATTACH TO PUMP ORDER**

SAE FLYWHEEL DIMENSIONS			
		11-1/2 CLUTCH	10 CLUTCH
A	NO.	8 EQUAL SPACE	8 EQUAL SPACE
	SIZE	3/8 - 16	3/8 - 16
B		13.125	11.625
C		13.875	12.375
D		1.56	2.12

SAE FLYWHEEL HOUSING DIMENSIONS				
		NO. 2	NO. 3	NO. 4
E	NO.	12	12	12
	SIZE	3/8 - 16	3/8 - 16	3/8 - 16
F		17.625	16.125	14.125
G		18.375	16.875	15.00

NOTE: Flywheel and bell housing must conform to SAE standards to ensure proper fit and function.

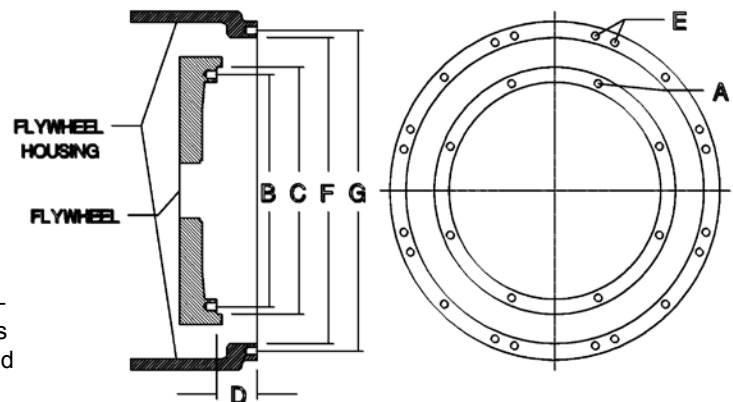

Hale Products, Inc. A Unit of IDEX Corp. 700 Spring Mill Avenue Conshohocken, PA 19428 USA  
 TEL: 610/825-6300 1-800/220-HALE FAX: 610/825-9615 www.haleproducts.com

Class 1 A Unit of IDEX Corp. 607 NW 27th Avenue Ocala FL 34475 USA  
 Tel: 352-629-5020 800-533-3569 Fax: 352-629-2902 www.class1.com

NOTE: Hale reserves the right to make improvements in design and materials and changes in price without notice  
 ALL PRICES ARE U.S. DOLLARS F.O.B. CONSHOCKEN, PA 19428 USA  
 Bulletin 920-2009, Sheet 1 of 1, © 2009 Hale Products Inc, Printed in USA