

CUSTOMER ORDER SPECIFICATION FOR HALE 80FC FIRE PUMP END

Customer Name: _____ Customer P.O. NO.: _____
 Order Prepared By: _____ Hale Customer NO.: _____ Date: _____
 Fire Dept. Name: _____ City: _____ State: _____
 Requested Delivery Date: _____ Max. Elevation for Pump Test: _____ FT
 Reference Specifications: _____

Engine: Mfr: _____ Model: _____ Horsepower: _____ @ _____ RPM
 Full Load Governed RPM: _____ Peak Torque: _____ LB/FT @ _____ RPM
 Application confirmed with: (for applications not on list) _____

1. Pump Model (Circle price of Model Desired):

FLOW (GPM) (LPM)	1750 (7000)	2000 (8000)	2250 (9000)	2500 (10000)	3000 (N/A)	Mat'l
80FC2-M*	\$10,224	\$10,224	\$10,224	\$10,224	\$10,224	Cast Iron
80FC3-M*	\$9,924	\$9,924	\$9,924	\$9,924	\$9,924	Cast Iron
80FC2-M	CONSULT FACTORY					Bronze
80FC3-M	CONSULT FACTORY					Bronze

2A (Check Two Boxes)

- Direct Mount SAE #3 or #4 Flywheel Housing N/C
- SAE 3to SAE 2 Bell Housing Adapter \$3695

2B DRIVE DISC, 2X10 SPLINE

- SAE # 10 Spring \$ 900
- SAE # 11-1/2 Spring \$ 900
- SAE # 10 Elastomeric \$1796
- SAE # 11-1/2 Elastomeric \$1796

Note: Spring drive disc are for gasoline or 2-cycle diesel engines only

3 Suction Ends: (Check One Box)

- None (8 x 13 ASA Flange) N/C
- 8 inch NPTF Flange Cast Iron \$ 590
- 8 inch NFPT Flange, Stainless \$1500

4. Discharge End (Check One Box):

- NONE (6 X 11 ASA FLANGE) N/C
- 6 INCH NPTF FLANGE Cast Iron \$ 270
- 6 INCH NPTF FLANGE Stainless \$ 820
- 6 INCH NPTF CHECK VALVE Cast Iron \$2510
(REQUIRES SPECIAL 45° POSITION)


NOTE: Engine Application data and compatibility is the responsibility of the purchaser.

5. Auxiliary Discharge Port (Circle Price of Option)

OPTION	PORT L
TRV120	383
TRV120-L	700
Magnesium Anode	128
Zinc Anode	69
1-1/4 NPT plug	N/C

6. Discharge Position (Check One Box)

- Up N/C
- Left \$250
- Right \$250
- Down \$250
- Position for Check Valve \$250

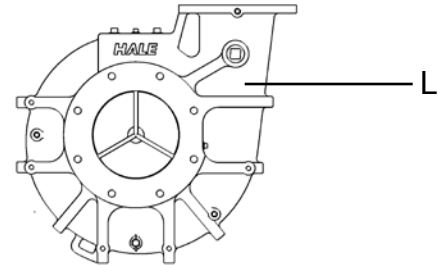


FOR ADDITIONAL OR LOOSE ACCESSORIES, VALVES, FLANGES, SEE SEPARATE ACCESSORY PAGE PRICE LIST AND ATTACH TO PUMP ORDER

SAE FLYWHEEL DIMENSIONS			
		11-1/2 CLUTCH	10 CLUTCH
A	NO.	8 EQUAL SPACE	8 EQUAL SPACE
	SIZE	3/8 - 16	3/8 - 16
B		13.125	11.625
C		13.875	12.375
D		1.56	2.12

SAE FLYWHEEL HOUSING DIMENSIONS				
		NO. 2	NO. 3	NO. 4
E	NO.	12	12	12
	SIZE	3/8 - 16	3/8 - 16	3/8 - 16
F		17.625	16.125	14.125
G		18.375	16.875	15.00

NOTE: Flywheel and bell housing must conform to SAE standards to ensure proper fit and function.

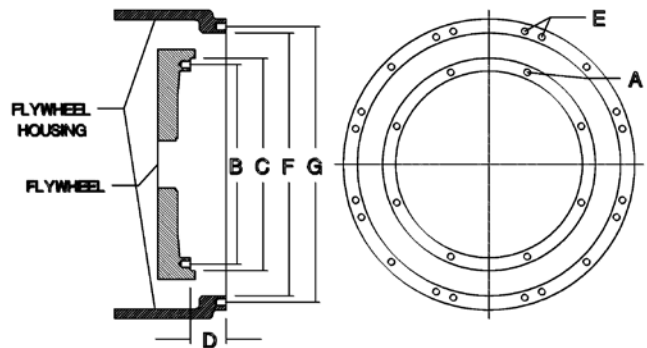

Hale Products, Inc. A Unit of IDEX Corp. 700 Spring Mill Avenue Conshohocken, PA 19428 USA
 TEL: 610/825-6300 1-800/220-HALE FAX: 610/825-9615 www.haleproducts.com

Class 1 A Unit of IDEX Corp. 607 NW 27th Avenue Ocala FL 34475 USA
 Tel: 352-629-5020 800-533-3569 Fax: 352-629-2902 www.class1.com