

CUSTOMER ORDER SPECIFICATION FOR HALE 80FCG FIRE PUMP END

Customer Name: _____ Customer P.O. NO.: _____
 Order Prepared By: _____ Hale Customer NO.: _____ Date: _____
 Fire Dept. Name: _____ City: _____ State: _____
 Requested Delivery Date: _____ Max. Elevation for Pump Test: _____ FT
 Reference Specifications: _____

Engine: Mfr: _____ Model: _____ Horsepower: _____ @ _____ RPM
 Full Load Governed RPM: _____ Peak Torque: _____ LB/FT @ _____ RPM
 Application confirmed with: (for applications not on list) _____

**1. Pump Model (Circle price of Model Desired): *
 Select Ratio in Step 3 below**

FLOW GPM LPM)	1750 (7000)	2000 (8000)	2250 (9000)	2500 (10000)	3000 (N/A)	Material
80FC2G-M*	\$23,408	\$23,408	\$23,408	\$23,408	\$23,408	Cast Iron
80FC3G-M*	\$23,108	\$23,108	\$23,108	\$23,108	\$23,108	Cast Iron
80FC2G-M	CONSULT FACTORY					Bronze
80FC3G-M	CONSULT FACTORY					Bronze

2. NFPA Rating: Options Available

- None N/C
- Provided \$675
- Dual Rating (US GPM/LPM) \$875


**3. Pump Ratio for 80FC2G-M and 80FC3G-M
 (Circle ratio desired):**

RATIO	MODEL
1.58	-15
1.71	-17
1.86	-19
2.05	-21
2.28	-23

**4. Gearbox Position (80FC2G-M and 80FC3G-M):
 (Check One Box)**

- Vertical N/C
- Inverted \$175
- Horizontal \$175


GEARBOX POSITION

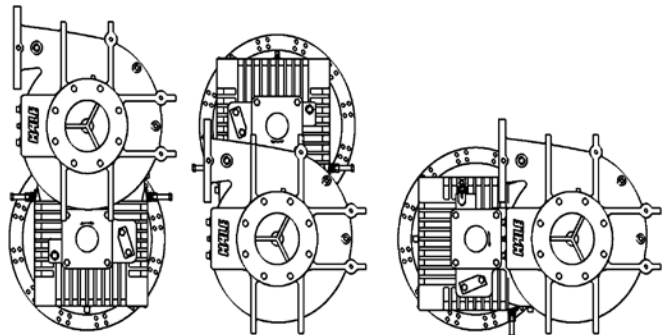

VERTICAL

INVERTED

HORIZONTAL

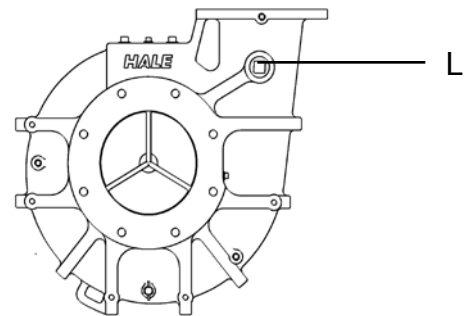

5. Auxiliary Discharge Port (Circle Price of Option)

OPTION	PORT L
TRV120	360
TRV120-L	670
Magnesium Anode	124
Zinc Anode	68
1-1/4 NPT plug	N/C

6A. (Check Two Boxes)

- Direct Mount SAE #2 or #3 Flywheel Housing N/C
- SAE 2 x SAE 1 Bell Housing Adapter \$3695

6B DRIVE DISC 2X10 SPLINE

- Drive Disc SAE#14 Elastomeric \$3100
- Drive Disc SAE #11-1/2 Elastomeric \$1796

7. Suction Ends: (Check One Box)

- None (8 x 13 ASA Flange) N/C
- 8 inch NPTF Flange Cast Iron \$ 550
- 8 inch NFPT Flange, Stainless \$1500
- 8 inch Weld Flange, Stainless \$1200

NOTE: Engine Application data and compatibility is the responsibility of the purchaser.

8. Discharge End (Check One Box):

- NONE (6 X 11 ASA FLANGE) **N/C**
- 6 INCH NPTF FLANGE Cast Iron \$ 270
- 6 INCH NPTF FLANGE Stainless \$ 820
- 6 INCH Weld Flange, Stainless \$ 925
- 6 INCH NPTF CHECK VALVE Cast Iron \$2510
(REQUIRES SPECIAL 45° POSITION)

9. Discharge Position: (Check One Box)

- Up **STD**
- Left \$ 250
- Right \$ 250
- Down \$ 250
- Position for Check Valve \$ 250

SAE FLYWHEEL DIMENSIONS				
A	NO.	14 CLUTCH	11-½ CLUTCH	10 CLUTCH
		8 EQUAL SPACE	8 EQUAL SPACE	8 EQUAL SPACE
	SIZE	1/2 - 13	3/8 - 16	3/8 - 16
	B	17.250	13.125	11.625
	C	18.375	13.875	12.375
	D	1.00	1.56	2.12

SAE FLYWHEEL HOUSING DIMENSIONS				
E	NO.	NO. 1	NO. 2	NO. 3
			SIZE	7/16 - 14
	F	20.125	17.625	16.125
	G	20.875	18.375	16.875

NOTE: Flywheel and bell housing must conform to SAE standards to ensure proper fit and function.

FOR ADDITIONAL OR LOOSE ACCESSORIES, VALVES, FLANGES, SEE SEPARATE ACCESSORY PAGE PRICE LIST AND ATTACH TO PUMP ORDER



Hale Products, Inc. A Unit of IDEX Corp. 700 Spring Mill Avenue Conshohocken, PA 19428 USA
 TEL: 610/825-6300 1-800/220-HALE FAX: 610/825-9615 www.haleproducts.com

Class 1 A Unit of IDEX Corp. 607 NW 27th Avenue Ocala FL 34475 USA
 Tel: 352-629-5020 800-533-3569 Fax: 352-629-2902 www.class1.com