


- NOTES:
- 1) AUX OUTPUT IS RATED FOR 1/2 AMP MAX.
  - 2) IF BATTERY VOLTAGE DROPS BELOW 11.8 VOLTS FOR MORE THAN 2 MINUTES: THE "LOW" LIGHT, BUZZER, AND AUX OUTPUT TURN ON.
  - 3) IF BATTERY VOLTAGE RISES ABOVE 12.8 VOLTS THE ALARM RESETS.
  - 4) THE ALARM MAY BE SILENCED FOR 2 MINUTES BY PRESSING THE SILENCE BUTTON.

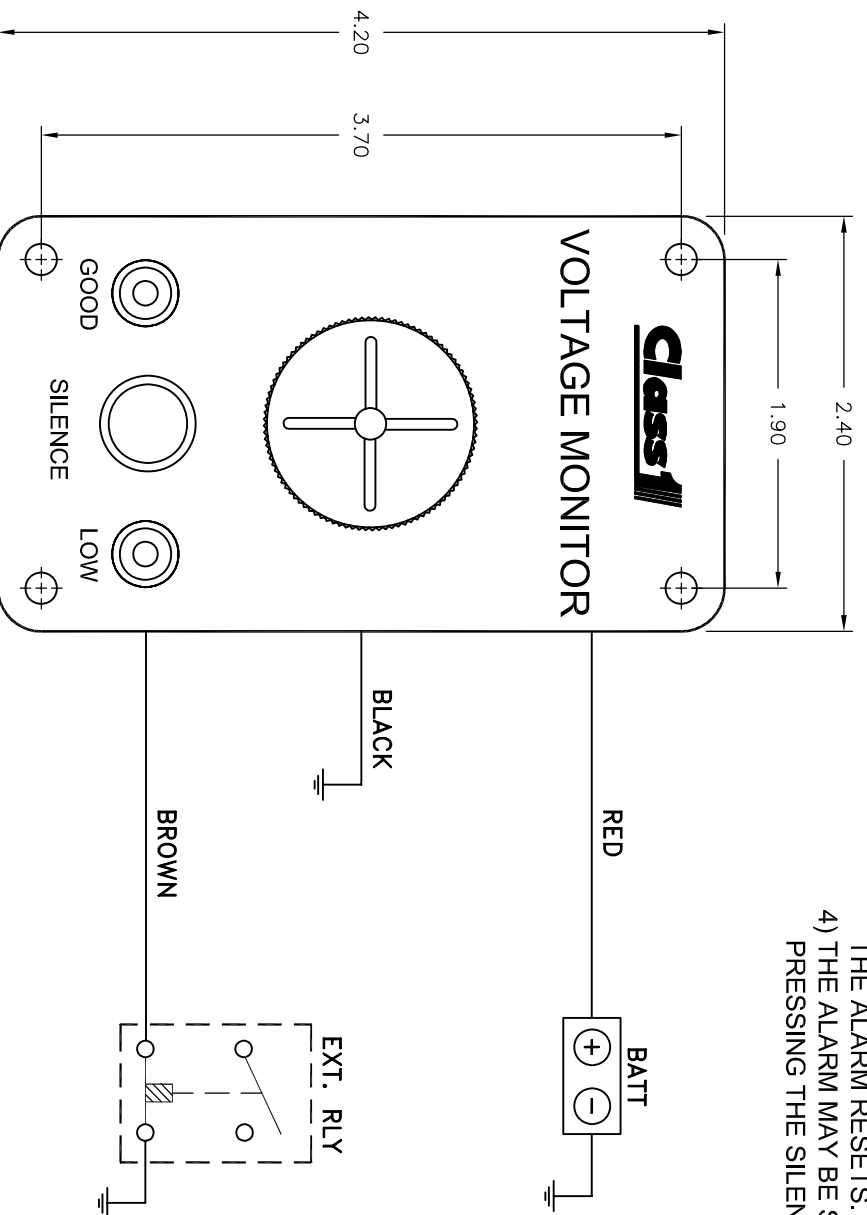

RED - POWER  
 BLACK - GND  
 BROWN - AUX OUTPUT

# RECOMMENDED HOOKUP

REV	2028	JB	08/15/02	Updated polling procedure and moved resistor location.
	EGR	BY	DATE	DESCRIPTION

**Class 1** A unit of  
**DEX** IDEX CORPORATION  
 607 N.W. 27th Ave.  
 Ocala, Florida 34475  
 Phone 352-629-5020  
 FAX 352-629-2902

**WIRING DIAGRAM**  
 LOW VOLTAGE MONITOR

CAGE IDENT. NO.	COMPLETED	DRAWN BY	CHECKED	DPP
080C4	10/03/98	WOR	--	--
SIZE	DRAWING NUMBER		REV	
A	100545		J	
SCALE	SHEET		4 OF 5	
NONE	1		J	

**DRAWING NOTES:**  
 UNLESS OTHERWISE SPECIFIED:  
 1. DIMENSIONS ARE IN INCHES  
 2. DO NOT SCALE DRAWING  
 3. DECIMAL TOLERANCE  
 XXXX = +/- .005  
 XXXX = +/- .0005  
 4. ANGLE TOLERANCE .5 DEG.

This document and the information herein are the property of Class 1 and is loaned to you subject to return on demand, unless otherwise agreed to in writing by Class 1.