



Multi-Camera Controller CSW3014



PRODUCT FEATURES




- 50" male video output reduces the number of connection points for a more robust design
- Compatible with all Voyager cameras, CEC connectors
- One composite A/V output (RCA)
- Three trigger inputs for auto-mode functions
- Monitor trigger output control

DESIGNED TO MOVE [YOU][™]

ASAelectronics.
THE MOBILE ELECTRONICS COMPANY SINCE 1977
2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com



Multi-Camera Controller CSW3014

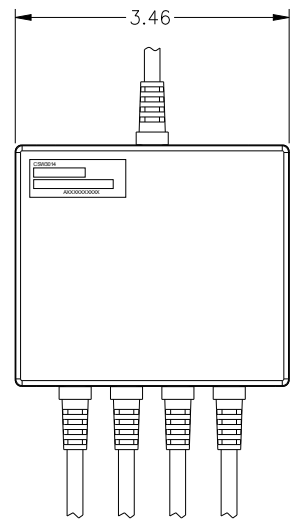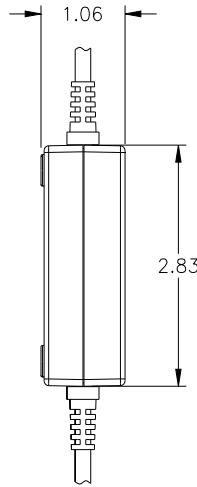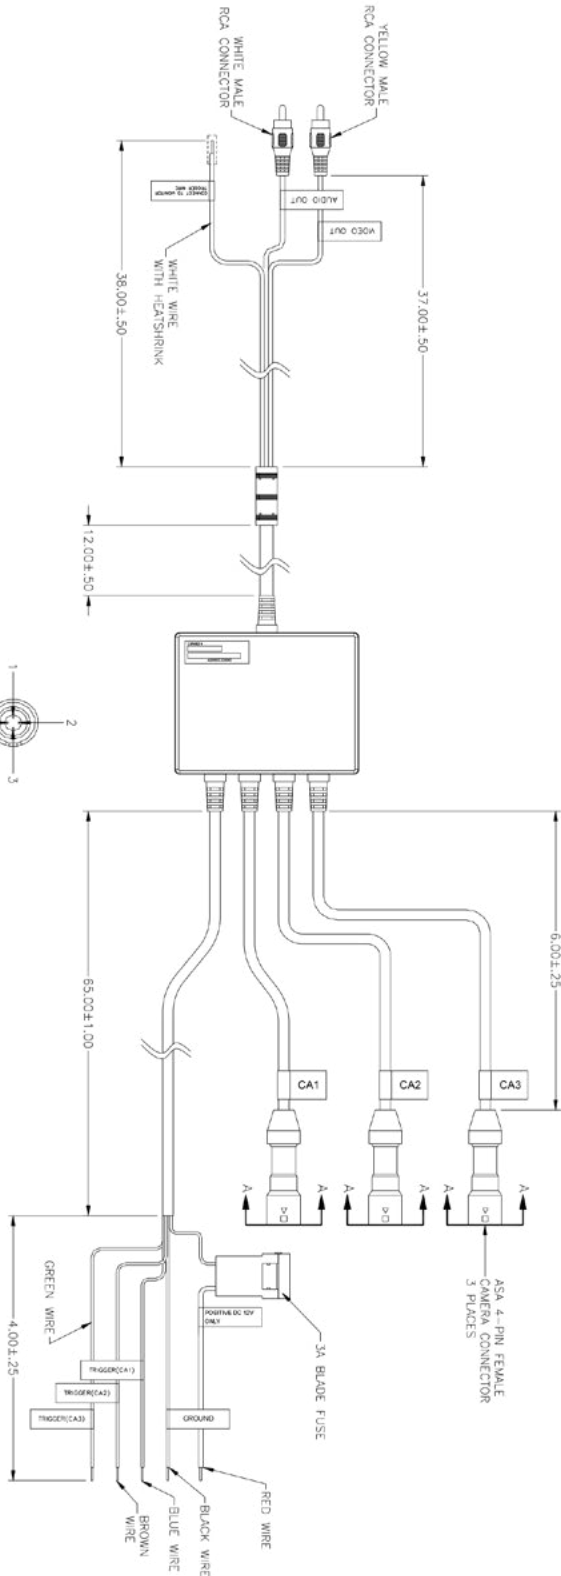

VIEW A-A
SHOWN FROM PIN VIEW

PIN NO.	WIRE COLOR	DESCRIPTION
1	CLEAR	VIDEO
2	RED	+12V
3	BLACK	GROUND/SHIELD
4	WHITE	AUDIO

SPECIFICATIONS:

General Specifications:

Operating Voltage	9-16VDC	
Current Draw @ 12V	Idle	241 mA
	Nominal	1 Camera 259 mA
	Maximum	3 Cameras 262 mA
Operating Temperature Range	-4°F to 149°F	-20°C to 65°C
Storage Temperature Range	-22°F to 158°F	-30°C to 70°C
Overall Dimensions	3.4"W x 1.1" H x 2.8" D	
Product Weight (unpacked)	11 oz.	