



SERVICE
MANUAL **4430**



marantz.

model 4430

Quadradiat 4 Receiver

TABLE OF CONTENTS

SECTION	PAGE
Introduction	1
Service Notes	1
AM Tuner	1
FM Tuner	2
Phono and Pre-Amplifier	4
Power Amplifier	5
Power Supply Unit	5
Audio Trouble Analysis	5
Test Equipment Required for Servicing	6
AM Alignment Procedure	6
FM Alignment Procedure	7
Audio Adjustment	8
Automatic Voltage Regulator Adjustment	8
Parts List	21 - 34
Technical Specifications	34 - 35

LIST OF ILLUSTRATIONS

FIGURE NO.	PAGE
1. Dial Stringing	8
2. Front Panel Adjustment and Component Locations	9
3. Main Chassis Component Locations (Top View)	9
4. Rear Panel Adjustment and Component Locations	10
5. Main Chassis Component Locations (Bottom View)	10
6. FM Front End Assembly P100 Component Locations	11
7. AM Tuner Assembly P150 Component Locations	11
8. FM IF Amplifier Assembly P200 Component Locations	12
9. MPX Stereo Decoding Amplifier Assembly P300 Component Locations	13
10. Pre, Tone Amplifier Assembly P400 Component Locations	13
11. Noise and DC Amplifier P470 Component Locations	14
12. Vari-Matrix Unit Assembly P500 Component Locations	15
13. Loudness, Hi-Filter and Speaker Switch Unit Assembly P550 Component Locations ...	15
14. Temperature Compensation Unit Assembly P580 Component Locations	15
15. Power Amplifier Assembly P600 Component Locations	16
16. Phono Amplifier Assembly P700 Component Locations	17
17. Tone Control Unit Assembly P750 Component Locations	17
18. Power Supply Unit Assembly P800 Component Locations	18
19. AC Rectifier Assembly P850 Component Locations	18
20. Balance Control Unit Assembly P900 Component Locations	18
21. Schematic Diagram	19 - 20

INTRODUCTION

This service manual was prepared for use by Authorized Warranty Stations and contains service information for Marantz Model 4430 Quadradiad 4 Receiver.

Service information and voltage data included in this manual are intended for use by the knowledgeable and experienced technician only. All instruction should be read carefully. No attempt should be made to proceed without a good understanding of the operation in the receiver.

The parts list furnish information by which replacement part may be ordered from the Marantz Company. A simple description is included for parts which can be usually be obtained through local suppliers.

1. SERVICE NOTES

As can be seen from the circuit diagram, the chassis of Model 4430 consists of following units. Each unit mounted on a printed circuit board is described within the square enclosed by a bold dotted line on the circuit diagram.

- | | |
|--|------------------------------|
| 1. FM Front End | mounted on P. W. Board, P100 |
| 2. AM Tuner | mounted on P. W. Board, P150 |
| 3. FM IF Amplifier | mounted on P. W. Board, P200 |
| 4. MPX Stereo Decoding Amplifier | mounted on P. W. Board, P300 |
| 5. Pre, Tone Amplifier | mounted on P. W. Board, P400 |
| 6. Noise and DC Amplifier | mounted on P. W. Board, P470 |
| 7. Vari-Matrix | mounted on P. W. Board, P500 |
| 8. Loudness, Hi-Filter and Speaker Switch Unit | mounted on P. W. Board, P550 |
| 9. Temperature Compensation | mounted on P. W. Board, P580 |
| 10. Power Amplifier | mounted on P. W. Board, P600 |
| 11. Phono Amplifier | mounted on P. W. Board, P700 |
| 12. Tone Control Unit | mounted on P. W. Board, P750 |
| 13. Power Supply | mounted on P. W. Board, P800 |
| 14. AC Rectifier | mounted on P. W. Board, P850 |
| 15. Balance Control Unit | mounted on P. W. Board, P900 |
| 16. Indicator Lamps | mounted on P. W. Board, P950 |

2. AM TUNER

All components except tuning capacitor and ferrite bar antenna are mounted on a printed circuit board P150.

The AM signals induced in a ferrite bar antenna are applied to the base of RF amplifier transistor H151 through a capacitor of C151 and amplified to the level required for overcoming the conversion noises, thus giving good S/N performance. The tuned circuits inserted in both out and input circuit of the RF amplifier assure very high image and spurious rejection performance. Thus amplified and selected AM signals are then applied to the base of converter transistor H152 through a coupling capacitor C156. While the local oscillator voltage is injected to the emitter of H152 through a capacitor C157, both AM signals and oscillating voltage are mixed at the base-emitter junction and converted into 455KHz intermediate frequency. The resulting IF signal is applied to the first IF transformer L153 consisting of one ceramic filter and two tuned circuits.

The output of L153 is led to the transistor H153 which in turn apply its output to the transistor of next stage H154. The fully amplified IF output is then applied to the diode H157 to detect audible signal through the detector transformer L154. The detected audio signal is filtered and amplified and the final audio output is obtained from the collector of H155 and applied to the TAPE OUT jacks and the function switch.

The DC component of the detected IF signal is used as a AGC voltage to control emitter

current of H153 which in turn control the bias current of the RF amplifier through the resistor R179 and R151. A part of IF signal output is also applied to the diode H158 through a capacitor C167 and rectified to obtain DC current for energizing the AM signal strength meter M010.

2.1 Suggestions for AM Tuner Trouble Shooting

Check for broken AM bar antenna, next try to tune station by rotating fly-wheel tuning knob slowly and observe the AM signal strength meter whether it deflects or not. If the signal strength meter gives a deflection at several frequencies received, no failure may exist in the stages at least preceding final IF transformer L154. Next connect a oscilloscope to the pin terminal J162 or J157 and check for audio signals with the tuning meter deflected. If the signal strength meter does not deflect, check the local oscillator circuit. Normal oscillating voltage at the hot end of the oscillator tuning capacitor is about 2 or 3 volts, varying with tuning capacitor position. When measuring oscillating voltage use a RF VTVM, no circuit tester gives correct indication. If the local oscillator voltage is normal, check all voltage distribution in the AM circuits by using a DC VTVM and compare the measured values with those given in the schematic diagram.

3. FM TUNER

The FM Tuner section of Model 4430 is divided into four functional blocks: FM Front End, IF Amplifier and Detector, Muting Control and MPX Stereo Decoding Circuit. FM signals induced by a FM antenna are led to FM antenna coil L101 through ATTENUATOR switch and a balun coil. These signals are then applied to the FET RF amplifier which in turn applies its output to the next FET Mixer H102 through the double tuned high selective circuits. The FET Mixer convert its input signal into 10.7MHz intermediate frequency and amplifies it at the same time. The H103 is a local oscillator and its output is injected into the source of the FET Mixer, the injection voltage is about 700mV. The 10.7MHz front end output is led to the next IF amplifier unit through a coaxial cable.

The IF amplifier unit consists of five stages of IF amplifier and one stage of AGC amplifier. Three pieces of dual elements ceramic filters are also used to obtain high selectivity, four stages of symmetrical diode limiters are also employed for the best limiting characteristics, improved capture ratio and good AM suppression.

A part of FM Front End output is applied to the AGC amplifier H201 and rectified its output is fed back to the gate of FET RF amplifier to decrease the gain with increased signal strength.

The IF signal sufficiently amplified through every stage of IF amplifier is finally applied to the transistor limiter. The detected audio output is led to the buffer amplifier H208 and its buffered output is led to; (a) noise amplifier H471 through resistor R471 and capacitor C471, (b) QUADRADIAL jack on the rear panel through resistor R484, (c) MPX stereo decoding circuit through R483.

3.1 Audio Muting and Stereo Mode Auto-Selecting Circuit

The muting circuit consisting of all solid-state electrical switching has been incorporated in the Model 4430. Three inputs control the muting function. The first is related to signal strength, the second to the noise condition at the detector and the third is derived from the DC component of the detector output. These inputs are properly matrixed and gated to provide muting free from noise and transients.

The first input of DC voltage obtained by rectifying a part of IF output signal from the H206 is applied to the base of H306 and turns on it, if the IF output is greater than predetermined level (muting threshold level). When the H306 is turned on the H307 is turned off, allowing the emitter-collector resistance increasing and the collector voltage rises about 9V. The increased collector voltage increases the gate bias voltage and turns on the switching FET H308, decreasing the source-drain resistance to near zero ohm and allowing the audio signal applied to the source to flow to the center of 38KHz switching transformer through the source-drain path.

When the input signal is lower than predetermined level, the DC output obtained is small and can not turn on the H306, thus the H306 keeps its turn-off stage and this makes H307 turn on, decreasing the collector voltage and turning off H308. Thus no audio signals can pass through the FET. This is the fundamental principle of the muting operation but for more elaborate muting operation the second and the third inputs are necessary.

The second input is used to protect the muting operation and MPX stereo beacon lamps from misoperation due to undesirable noises. The high frequency noises included in the detected audio signals are separated by a small capacitor C471 and amplified by the noise amplifier transistor H471 and its output is rectified by the two diodes. The rectified DC output is proportional to the noise components in the audio signals.

When there are excessive noises in the audio signals such as obtained with a station incorrectly tuned in, the rectified DC output turns on the transistor H472, decreasing the emitter-collector resistance to zero. This means the collector of H307 is short-circuited to the ground, therefore the H308 is turned off and any audio signals having excessive high frequency noises can not go through the FET's source-drain path.

The transistor H303 connected in series with the 19KHz pilot signal amplifier transistor H302 is also turned off (when the transistor H472 or H307 are turned on.) and no current flows in the H302, resulting in turning off the stereo beacon lamps. Thus misoperation due to undesirable noises is also avoided.

The third input is obtained from the FM discriminator circuit. The DC output so called "S" curve is applied to the gate of H478 through a resistor R273 and dividing network (R485 & R486). The DC output is zero with a station correctly tuned in, but will vary from negative to positive values or vice versa when the tuning point is deviated toward either plus or minus frequency from the correct tuning frequency.

When the DC output is increased to a greater level than that of predetermined, the increased source potential of H478 makes the transistor H481 turn on, and this makes the H306 turn off, ... H307 turn on, ... H308 turn off, ... H303 turn off (this means no 19KHz pilot signal is amplified and no stereo beacon is turned on.). When the DC output is increased to the negative predetermined level, the decreased source potential turns off the H479 which in turn makes the H480 turn on and the H306 is turned off. The subsequent changes are exactly the same as that just described above.

Thus when the tuning is shifted-or-deviated to the certain frequencies in which undesirable noisy side-audio signals are produced, both muting and 19KHz switching transistors are operated automatically and open the circuits.

With the station correctly tuned in, the bias current of the FET H478 is adjusted so that both transistor H480 and H481 are not turned on, giving no effect on the transistor H306.

3.2 MPX Stereo Decoding Circuit

The buffered and non-equalized audio signals are applied to the first amplifier H301 which serve as a tuned amplifier for the pilot signal in the composite signals and as a buffer amplifier for the audio signals. The amplified 19KHz pilot signal is led to the second 19KHz amplifier H302 and further amplified if switching transistor H303 is turned on by the controlling DC signal as described in the preceding chapter. The final 19KHz pilot signal is rectified by the doubler circuit consisting of the H315 and H316 to obtain synchronized 38KHz amplifier driving signal.

The H304 is the 38KHz tuned amplifier and supplies its output to the switching matrix circuit consisting of four diodes. While the composite signals are applied to the center tap of switching transformer 1/2 L302. The right and left stereo signals decoded by the switching circuit are led to the crosstalk cancelling amplifier which utilizes complementary configuration with NPN and PNP transistors through de-emphasis network consisting of C315 and R335, and C316 and R336, L305 is a low-pass filter networks having very sharp cut off characteristics and eliminates undesirable residual switching signals. Transistors H313 and H314 are buffer amplifiers and their outputs are led to the function switch.

3.3 Suggestion for Trouble Shooting of FM Tuner

3.3.1 Symptom: No FM Reception

First turn on the power switch and try to tune FM stations. Rotate the fly-wheel tuning knob slowly and observe the FM signal strength meter. If the signal strength meter deflect at several frequencies received, the tuner circuits preceding the discriminator circuit may have no failure. When no reading is obtained in the meter, check FM local oscillator circuit, using a RF VTVM. The normal local oscillator voltage is one or two volts (rms) at the tuning capacitor, depending on the tuning capacitor position. If the local oscillator voltage is normal, next check all voltage distribution in the FM Front End and IF amplifier unit and compare them with those shown in the circuit diagram. When signal strength meter deflects but no sound is obtained, check audio circuits, using high sensitive oscilloscope.

3.3.2 Symptom: No Stereo Separation

First check the "MONO" switch is in normal out position. Connect a FM RF signal generator output modulated by a stereo modulator to the rear FM ANTENNA terminals, and check the stereo beacon is turned on or not. If not turned on, check for 19KHz pilot signal and 38KHz switching signal, using an oscilloscope.

4. PHONO AND PRE-AMPLIFIER

Signals from the PHONO jacks are applied to the phono amplifier mounted on P700. The amplified and RIAA equalized phono signals and signals from the tuner section and the TAPE, AUX1, AUX2, jacks are applied to the selector switch which, in turn, leads the selected signals to the TAPE OUT jacks and mode switch.

Applied to the other section of the TAPE MON switch are signals from the TAPE IN jacks. The TAPE MON switch selects the signals from the mode switch or those from the TAPE IN jacks and the selected signals go to the pre-amplifier. Signals are then mode processed by the mode switch and its associated circuit and applied to the tone control amplifier through the volume control. The bass and treble controlled signals from the tone control amplifier pass through the balance control section and the hi-filter before they reach the main amplifier.

4.1 Mode Switch

Mode switch S005 has positions of MONO, 2 CH, DISCRETE, VARI-MATRIX, and SQ DECODER.

In the MONO position, all input signals are mixed together and delivered to all four channels.

In the 2 CH position, each pair of input signals right-front (RF) and right-rear (RR), and left-front (LF) and left-rear (LR) are mixed together. The resultant signals (RF + RR) and (LF + LR) are delivered to the pairs of RF and RR, and LF and LR channels, respectively.

In the DISCRETE position, each channel signal is separately routed to the corresponding channel.

In the VARI-MATRIX position, 2-channel stereo input signals are converted into quadraphonic signals through the vari-matrix circuit; the input right and left channel signals are fed directly to the LF and RF channels, while the signals to the LR and RR channels are synthesized from the 2-channel input signals under the control of the dimension control. The LR and RR channel signal components are controlled by the dimension control as shown below.

Dimension Control Setting	LR Output	RR Output
Minimum (FCW)	LF + RF	RF + LF
Center	LF	RF
Maximum (FCW)	LF - RF	RF - LF

When the dimension control is set to the minimum position the LR and RR channel signals

become monophonic, to the center are stereophonic, and to the maximum are out of phase, thus providing vanished sound image positioning.

In the SQ DECODER position, signal sources encoded by the CBS SQ system are ideally decoded into 4-channel signals. Required for this operation is incorporation of the SQ Adaptor, Model SQA-1, into the Model 4430.

4.2 Balance Control

Signals from the tone control amplifiers are fed into the balance control circuit, in which the signals are controlled by three balancers: FRONT L-R, REAR L-R, and FRONT-REAR. By setting the FRONT-REAR balancer to the "FRONT" side and the FRONT L-R balancer to the "L" side, for example, only the front left channel is driven.

The balance control circuit is provided with the remote control switch which makes the Model RC-4 Remote Control Box operative when set to the "REMOTE" position. In the "REMOTE" position the balancers on the Model 4430 become ineffective since signals are led to the Model RC-4. The volume level can be adjusted by the volume control either on the Model 4430 or Model RC-4. However, the maximum volume level available by adjustment of the Model RC-4 is determined by the volume control on the Model 4430.

Balance controlled signals are led through the hi filter to the main amplifier section for further power amplification.

5. POWER AMPLIFIER

Differential amplifier consists of the transistors H601 and H603 to provide satisfactory D.C. stability.

The transistor H605 drives the inverter transistors H611 and H613 which, in turn, drive the power stage consisting of H001 and H002. Transistors H607 and H609 are current limiter operating as a power transistor protection circuit.

Excessive current flow in the power output stage is detected by the resistors R642 and R644 and the resultant variation is applied to the transistors H607 and H609 and make them turned on. This decreases the base biasing current for H611 and H613. In this way the current flow in the power output stage (H001 and H002) is restricted within a safe predetermined value.

6. POWER SUPPLY UNIT

The power supply unit consisting of transistors H805 and H806, which operates as an automatic voltage regulator provides +35V DC to all of the audio amplifiers except power amplifiers, and H803 which operates as the voltage regulator provides +14V DC to the tuner section, and H808, H809 and H810 which operates as the speaker protector to relay circuit.

7. AUDIO TROUBLE ANALYSIS

1. Excessive line consumption
 - a. Check for shorted rectifiers H851 through H854.
 - b. Check for shorted transistors H001 through H008.
 - c. Check L003 for short.
2. No line consumption or zero bias
 - a. Check line cord, fuse, shorted H581 & H582, H626 & H627.
 - b. Check for open rectifiers H851 through H854, or open L003.
3. Excessive hum and noise level
 - a. Check filter capacitors C006 through C009, C605 & C606.
 - b. Check for shorted transistor H805.
4. Parastic oscillation
 - a. Check for defective capacitors, C607, C608, C619, C620, C621 and C622.

5. Improper clipping

a. Check for defective resistor, R662 & R663.

8. TEST EQUIPMENT REQUIRED FOR SERVICING

Table 1 lists the test equipment required for servicing the Model 4430 Receiver.

Item	Manufacturer and Model No.	Use
AM Signal Generator		Signal source for AM alignment.
Test Loop		Used with AM Signal generator.
FM Signal Generator	Less than 0.3% distortion	Signal source for FM alignment.
Stereo Modulator	Less than 0.3% distortion	Stereo separation alignment and trouble shooting.
Audio Oscillator	Weston Model CVO-100P, less than 0.02% residual distortion is required.	Sinewave and squarewave signal source.
Oscilloscope	High sensitivity with DC horizontal and vertical amplifiers.	Waveform analysis and trouble shooting and ASO alignment.
VTVM	With AC, DC, RF range	Voltage measurements.
Circuit Tester		Trouble shooting.
AC Wattmeter	Simpson, Model 390	Monitors primary power to Amplifier.
AC Ammeter	Commercial Grade (1-10A)	Monitors amplifier output under short circuit condition.
Line Voltmeter	Commercial Grade (0-150V AC)	Monitors potential of primary power to amplifier.
Variable Autotransformer (0-140V AC, 10 amps)	Powerstat, Model 116B	Adjusts level of primary power to amplifier.
Shorting Plug	Use phono plug with 600 ohm across center pin and shell.	Shorts amplifier input to eliminate noise pickup.
Output Load (8 ohms, $\pm 1\%$ 100W)	Commercial Grade	Provides 8-ohm load for amplifier output termination.
Output Load (4 ohms, $\pm 1\%$ 100W)	Commercial Grade	Provides 4-ohm load for amplifier output termination.

Table 1 Test Equipment Required for Servicing

9. AM ALIGNMENT PROCEDURE

9.1 AM IF Alignment

1. Connect a sweep generator to the J151 and an alignment scope to the J162.
2. Rotate each core of IF transformer L153 and L154 for maximum height and flat top symmetrical response.

9.2 AM Frequency Range and Tracking Alignment

1. Set AM signal generator to 525KHz. Turn the tuning capacitor fully closed (place the tuning pointer at the low end.) and adjust the oscillator coil L152 for maximum audio output.
2. Set the signal generator to 1650KHz. Place the tuning pointer in the high frequency end and adjust the oscillator trimmer on the oscillator tuning capacitor for maximum audio output.
3. Repeat the step 1 and 2 until no further adjustment is necessary.
4. Set the generator to 600KHz and tune the receiver to the same frequency and adjust a slug core of AM ferrite rod antenna and RF coil L151 for maximum output.
5. Set the generator to 1400KHz and tune the receiver to the same frequency and adjust both trimming capacitors of antenna and RF tuned circuit for maximum output.
6. Repeat the step 4 and 5 until no further adjustment is necessary.

Note: During tracking alignment reduce the signal generator output as necessary to avoid AGC action.

10. FM ALIGNMENT PROCEDURE

1. Connect a FM signal generator to the FM ANTENNA terminals and an oscilloscope and an audio distortion analyzer to the TAPE OUTPUT jacks on the rear panel.
2. Set the FM SG to 87.5MHz and provide about 3 to 5 μ V. Place the tuning pointer at the low frequency end by rotating the tuning knob and adjust the core of oscillator coil L104 to obtain maximum audio output.
3. Set the FM SG to 108.5MHz and provide about 3 to 5 μ V output. Rotate the tuning knob and place the tuning pointer at the high frequency end and adjust the trimming capacitor C106 for maximum output.
4. Repeat the step 2 and 3 until no further adjustment is necessary.
5. Set the FM SG to 90MHz and tune the receiver to the same frequency. Decrease signal generator output until the audio output level decreases with the decreasing generator output. Adjust the antenna coil L101, RF coil L102 and L103 and IF transformer L105 for minimum audio distortion.
6. Set the FM SG to 106MHz and tune the receiver to the same frequency. Adjust the trimming capacitor C102, C104 and C105 for minimum distortion.
7. Adjust the secondary core (upper) of discriminator transformer L201 so that the center tuning meter pointer indicates its center at no signal applied. Set the FM SG to 98MHz and increase its output level to 1 K μ V and tune the receiver to the same frequency so that the center tuning meter pointer indicates its center. Adjust the primary core (lower) of L201 for minimum distortion.

10.1 Stereo Separation Alignment

1. Set the FM SG to provide 1K μ V at 98MHz. Tune the receiver to the same frequency so that the center tuning meter pointer indicates its center.
2. Modulate the FM SG with stereo composite signal consisting of only subchannel signal (of course a pilot signal must be included). Adjust the core of L301 for maximum audio output, then, modulate the signal generator with a stereo composite signal consisting of only L channel signal and again adjust the core of L301 for maximum audio output.
3. Adjust the trimming resistor R365 for maximum and same separation in both channels.

10.2 Muting Circuit Alignment

1. Connect a VTVM across the resistor R487 and adjust the resistor R487 until the meter reads 0.75V DC at no signal.
2. Set the FM SG to provide 1 K μ V at 98MHz and tune the receiver to the same frequency correctly.

3. Turn on MUTING pushswitch. Shift the FM signal generator frequency to plus and minus and note both plus and minus shifted frequencies at which undesirable audio side responses are muted out. Adjust the R487 so that the same shifted frequencies mute the undesirable side response.

11. AUDIO ADJUSTMENT

1. Connect a VTVM to J613(+) and J629(-) and adjust the trimming resistor R628 until the VTVM reads 10mV DC. For the other channel connect the VTVM to J614(+) and J630(-) and adjust the R629 for the same reading.
2. Connect a VTVM to J629(+) and J623(-) and adjust the trimming resistor R613 until the VTVM reads 0V DC. For the other channel connect the VTVM to J630(+) and J624(-) and adjust the R614 until the VTVM reads 0V DC.

12. AUTOMATIC VOLTAGE REGULATOR ADJUSTMENT

Connect a VTVM to J802(+) and J820(-) and adjust R809 until the VTVM reads 35 V under no signal condition.

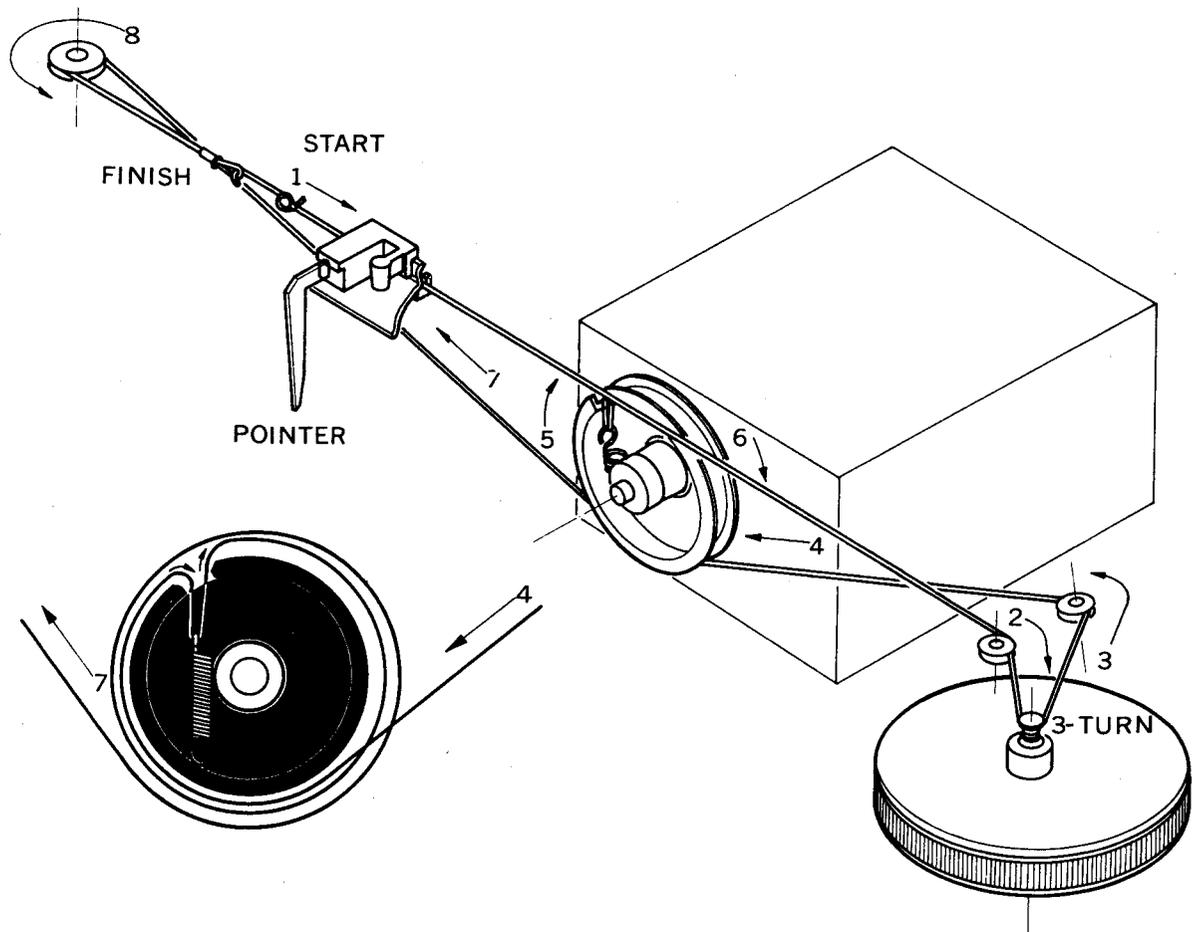


Figure 1. Dial Stringing

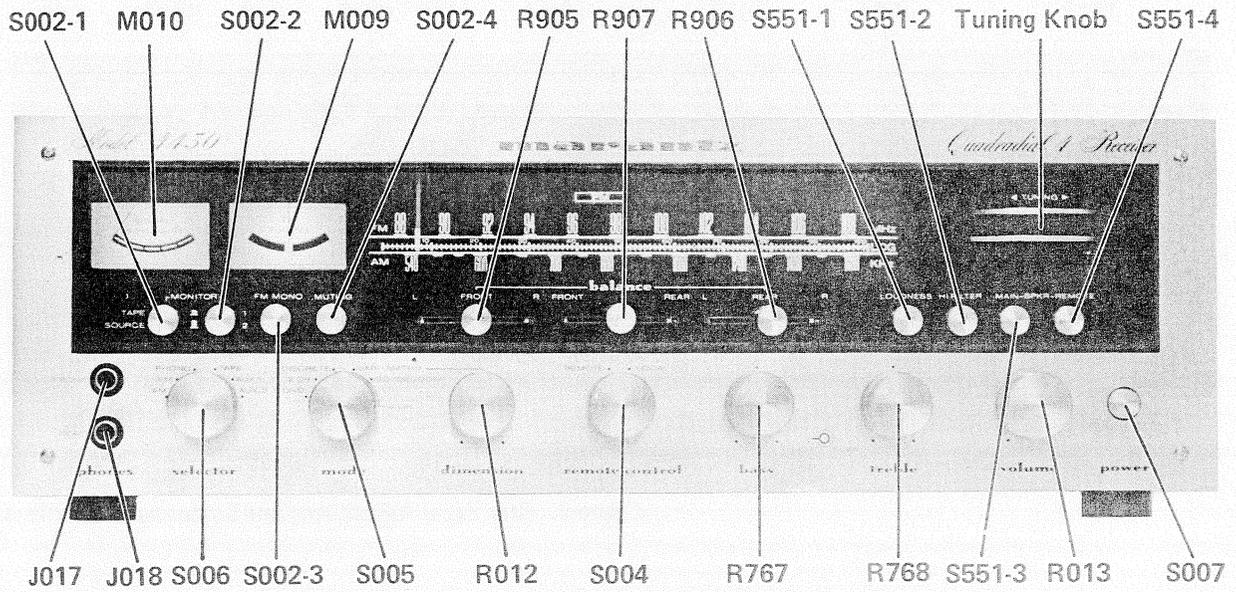


Figure 2. Front Panel Adjustment and Component Locations

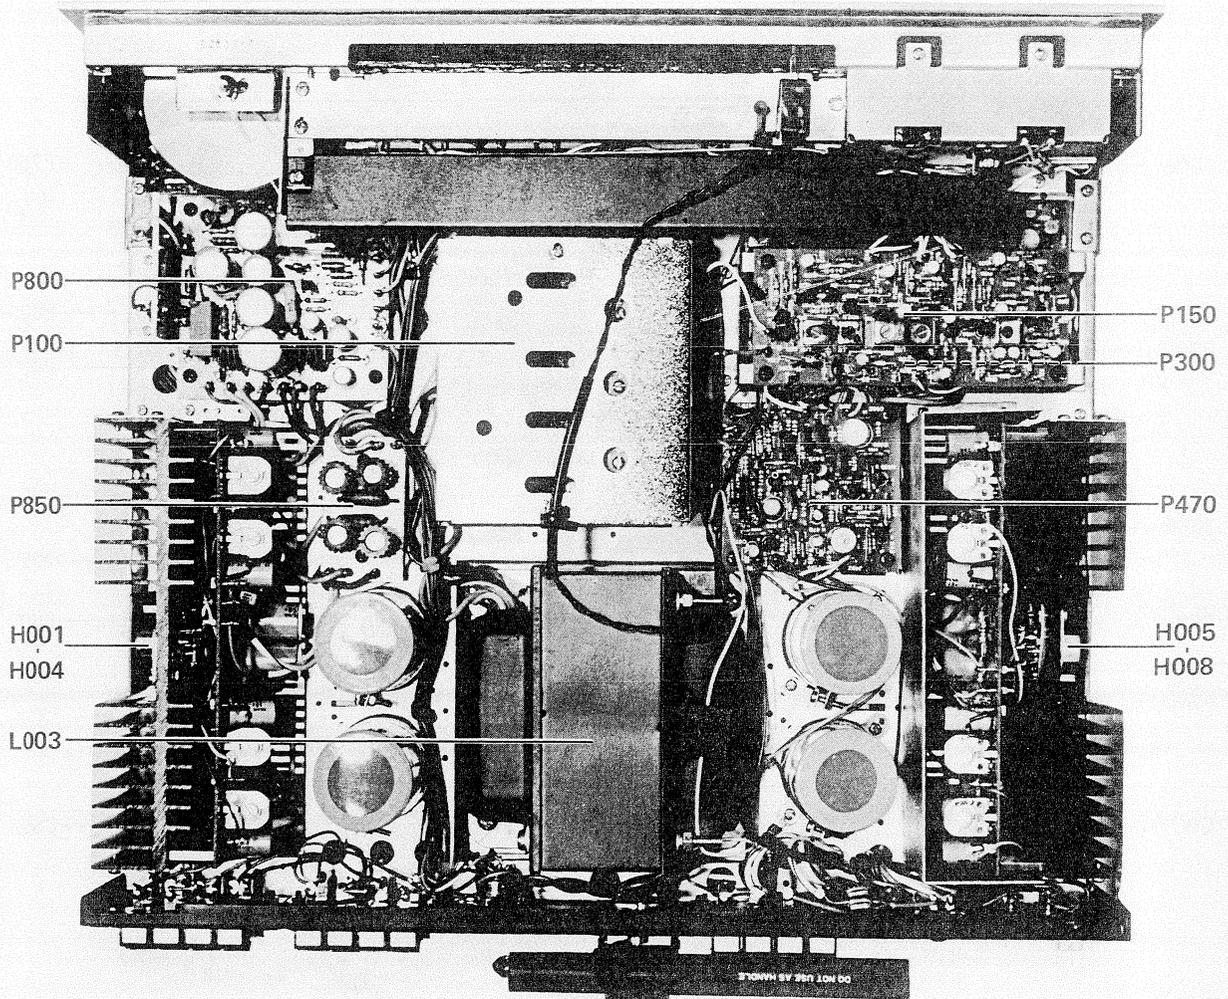


Figure 3. Main Chassis Component Locations (Top View)

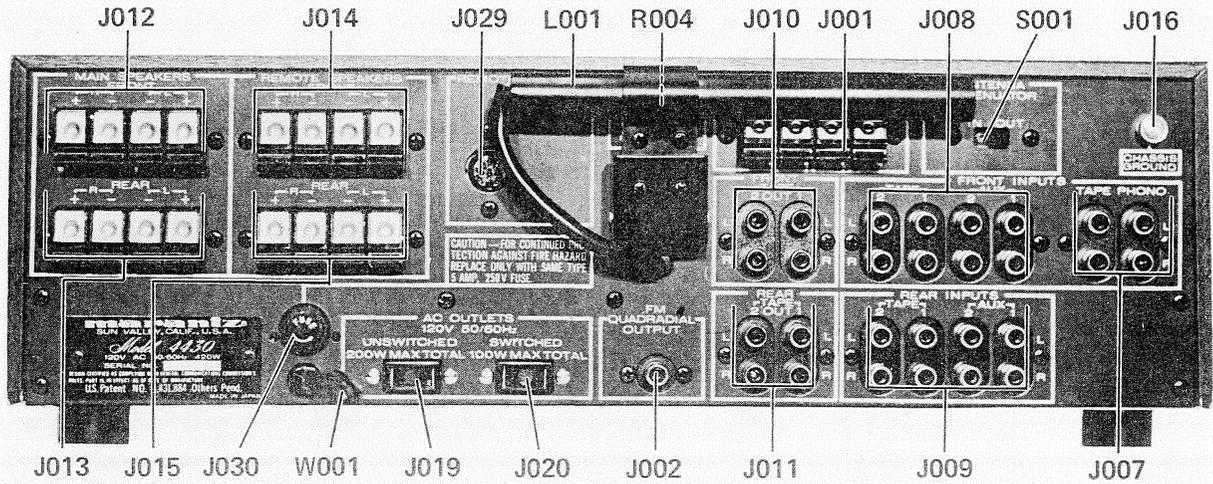


Figure 4. Rear Panel Adjustment and Component Locations

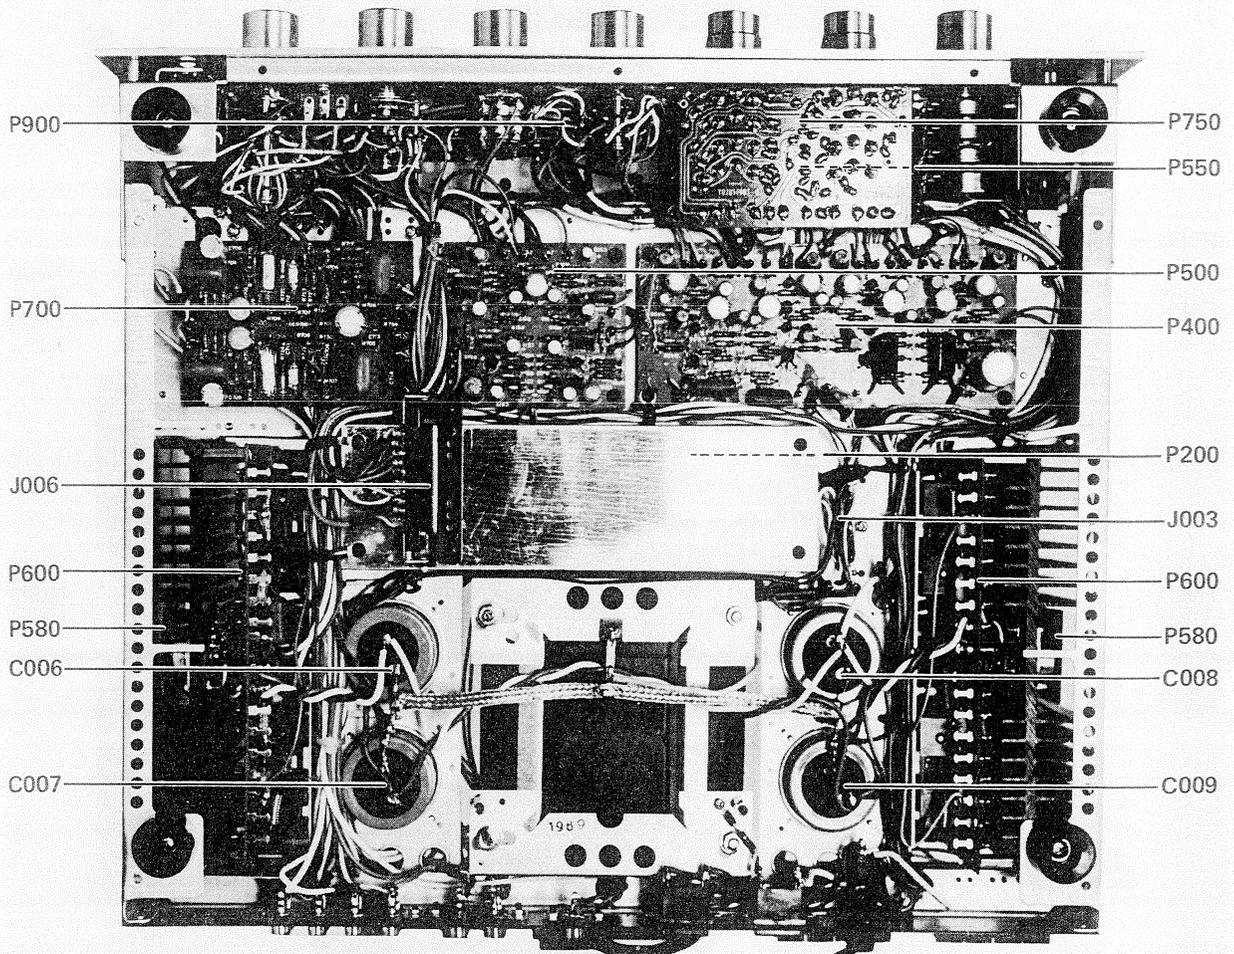


Figure 5. Main Chassis Component Locations (Bottom View)

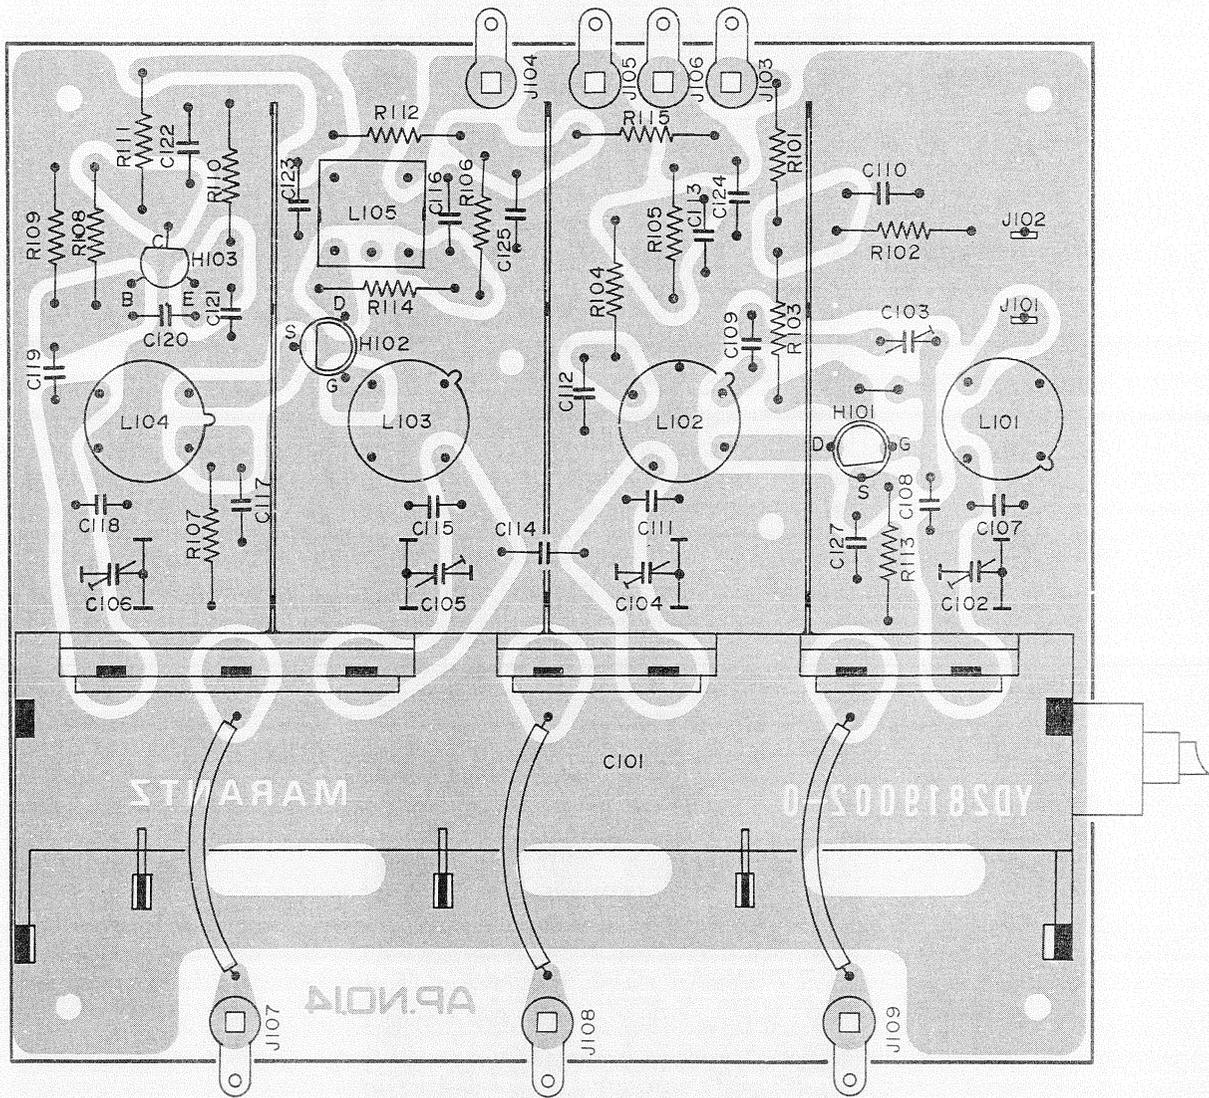


Figure 6. FM Front End Assembly P100 Component Locations

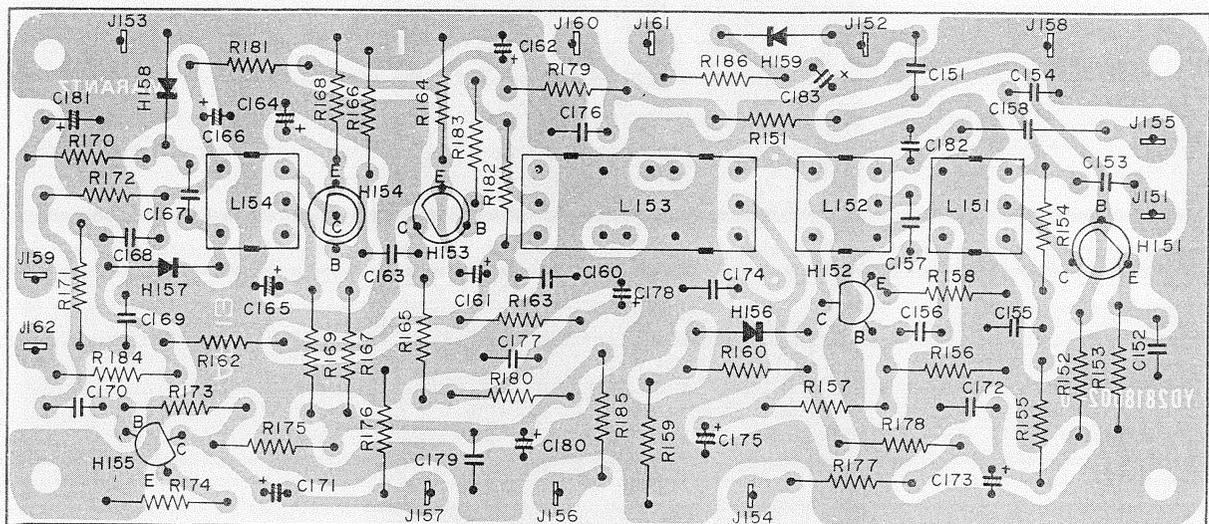


Figure 7. AM Tuner Assembly P150 Component Locations

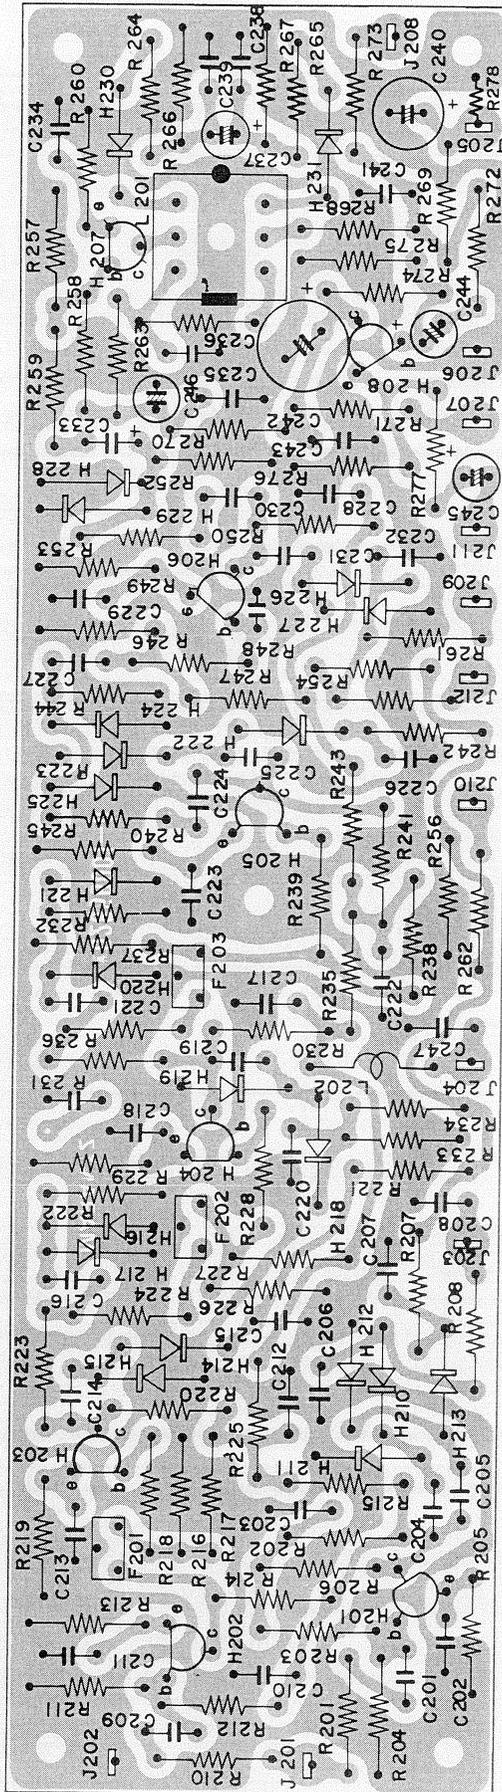


Figure 8. FM IF Amplifier Assembly P200 Component Locations

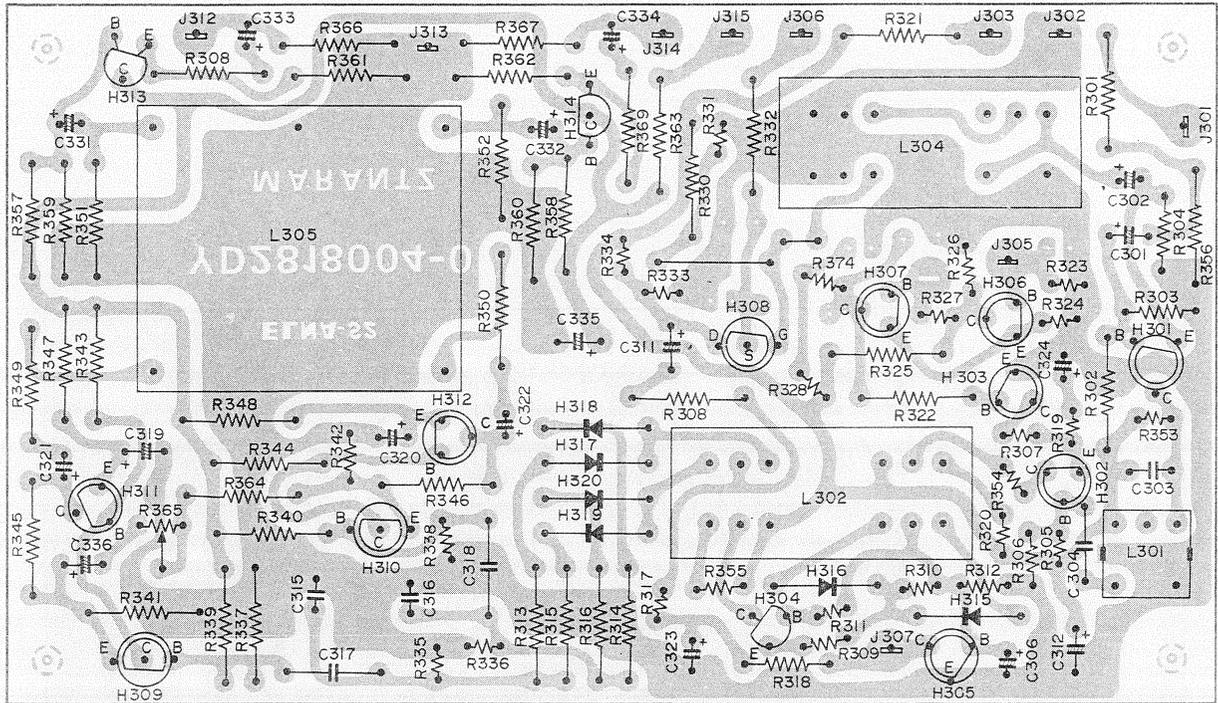


Figure 9. MPX Stereo Decoding Amplifier Assembly P300 Component Locations

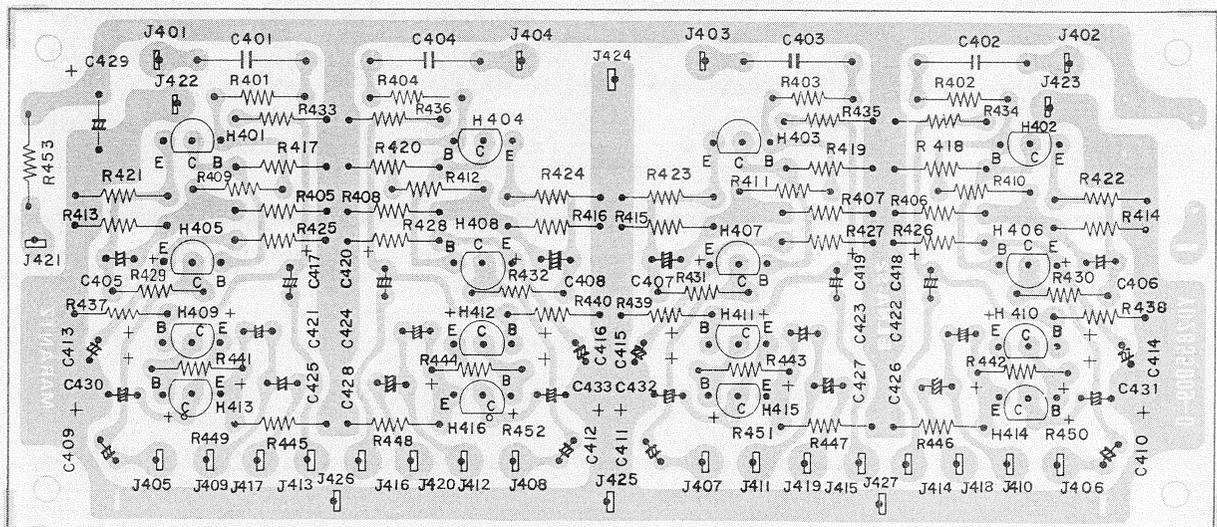


Figure 10. Pre, Tone Amplifier Assembly P400 Component Locations

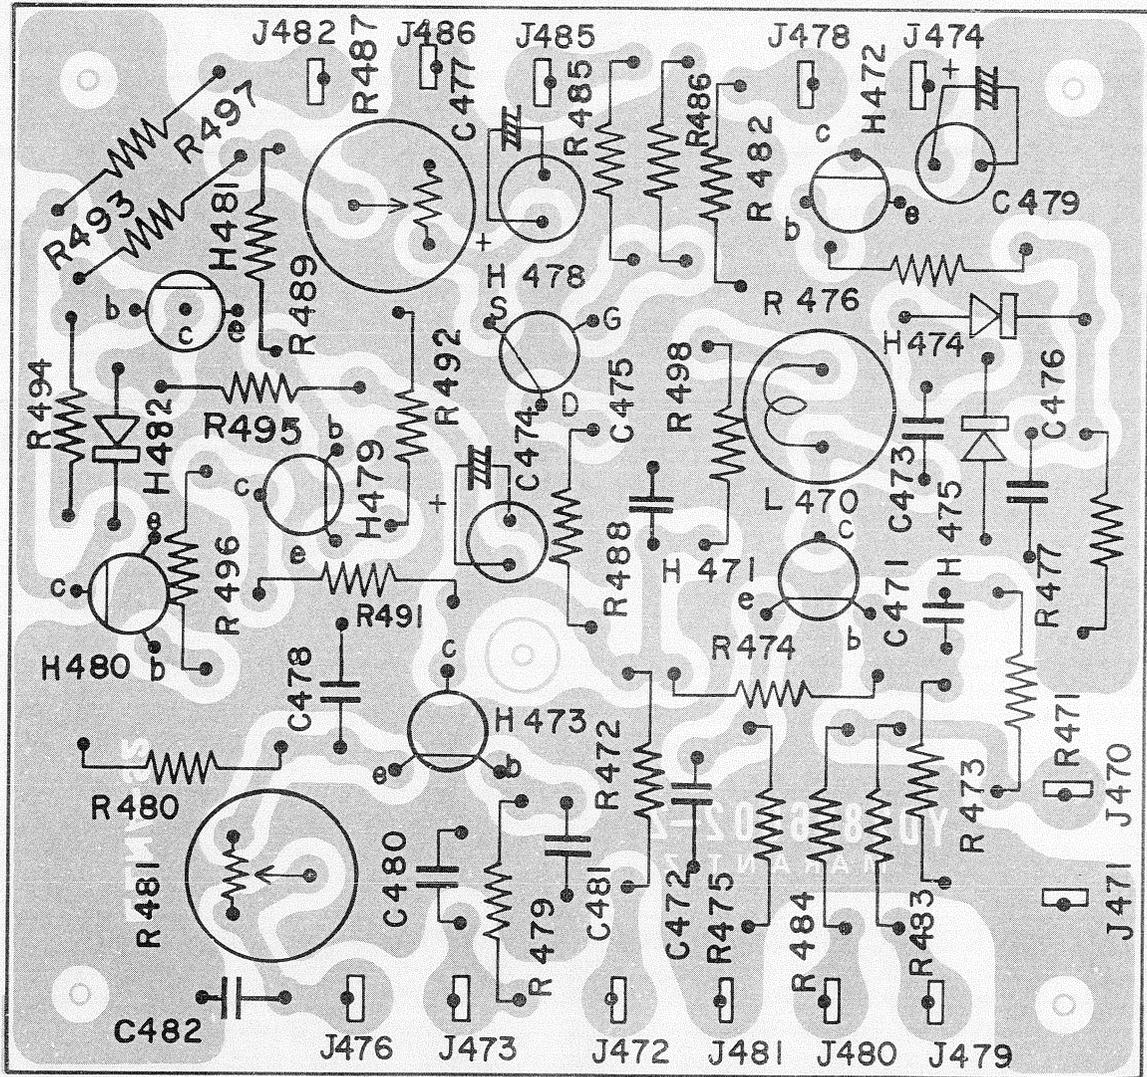


Figure 11. Noise and DC Amplifier P470 Component Locations

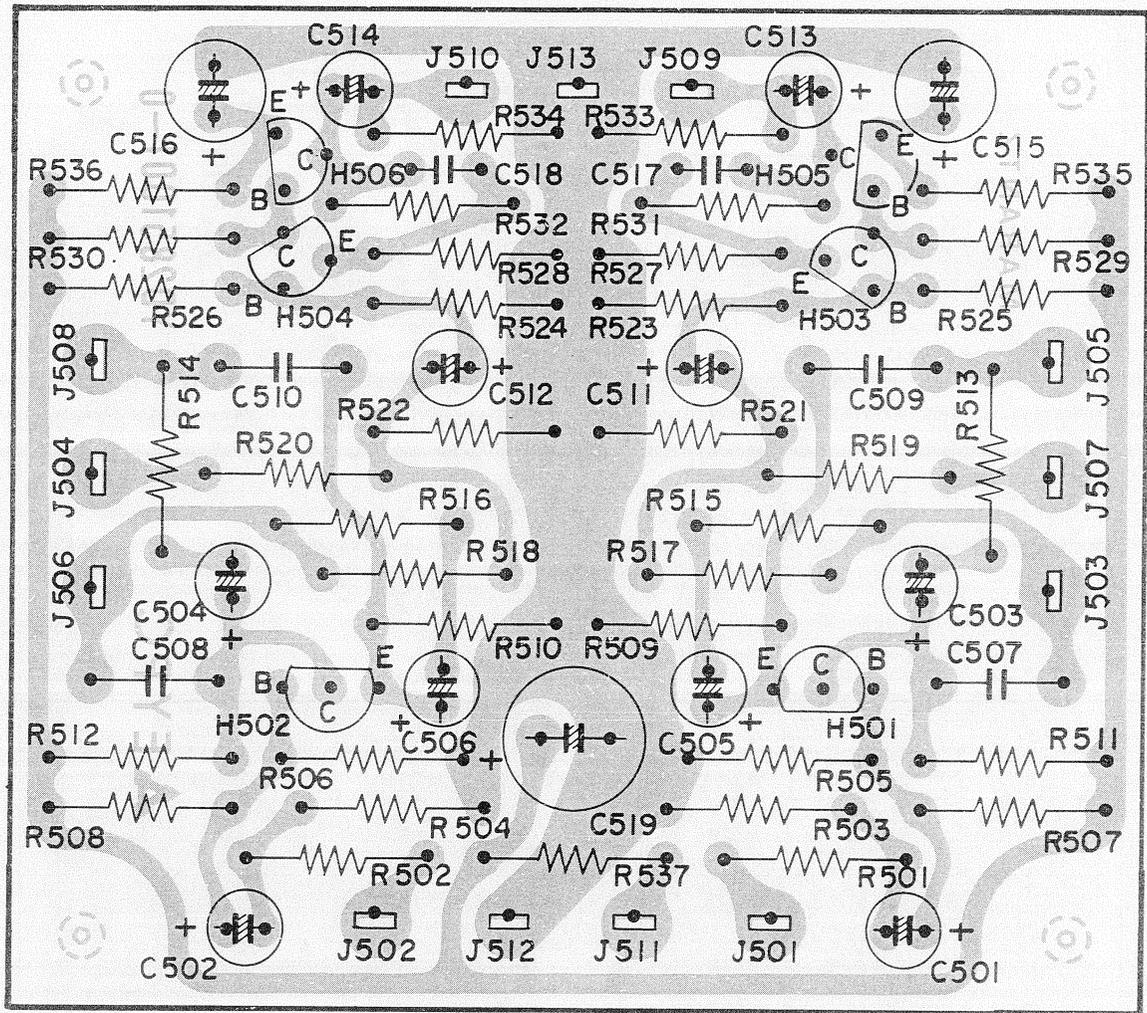


Figure 12. Vari-Matrix Unit Assembly P500 Component Locations

Figure 14. Temperature Compensation Unit Assembly P580 Component Locations

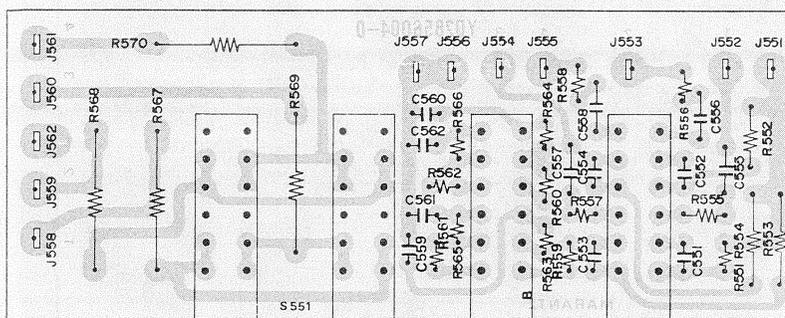
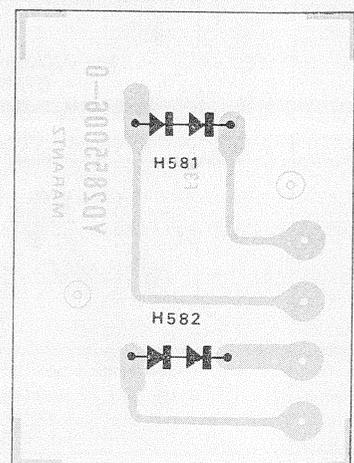


Figure 13. Loudness, Hi-Filter and Speaker Switch Unit Assembly P550 Component Locations



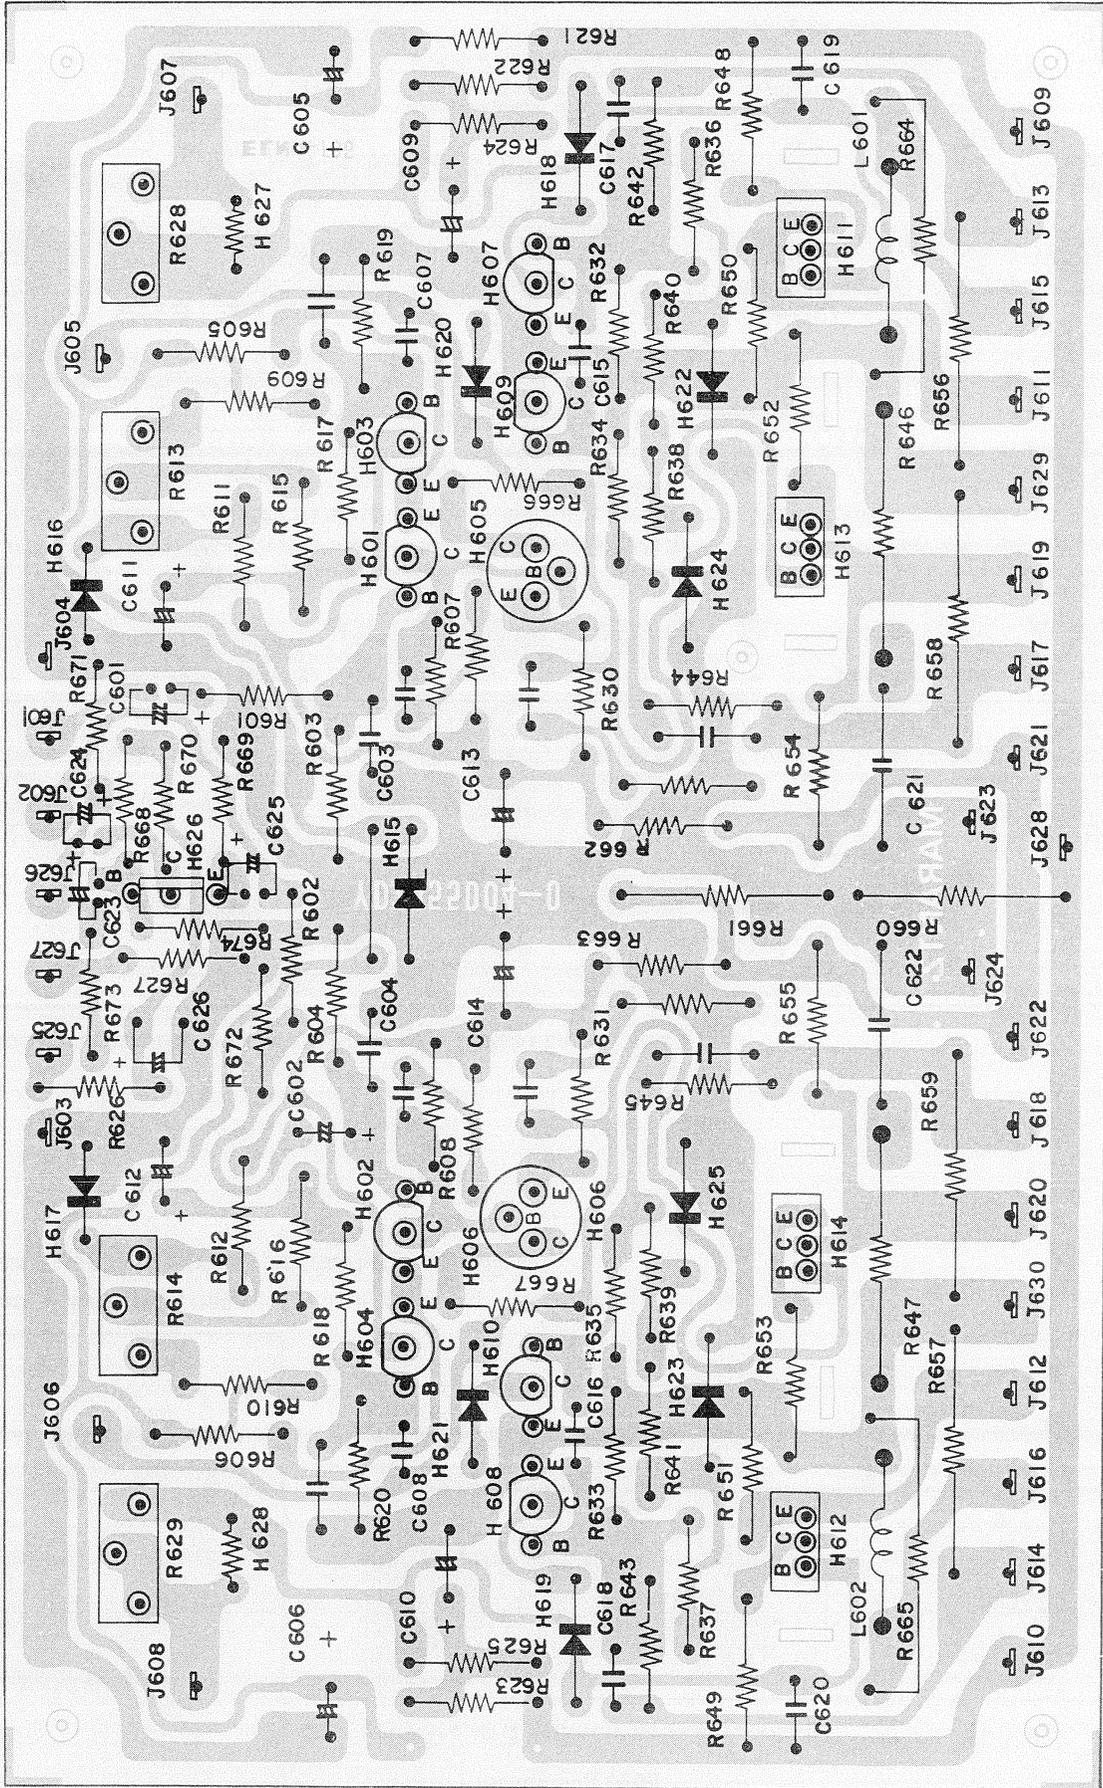


Figure 15. Power Amplifier Assembly P600 Component Locations

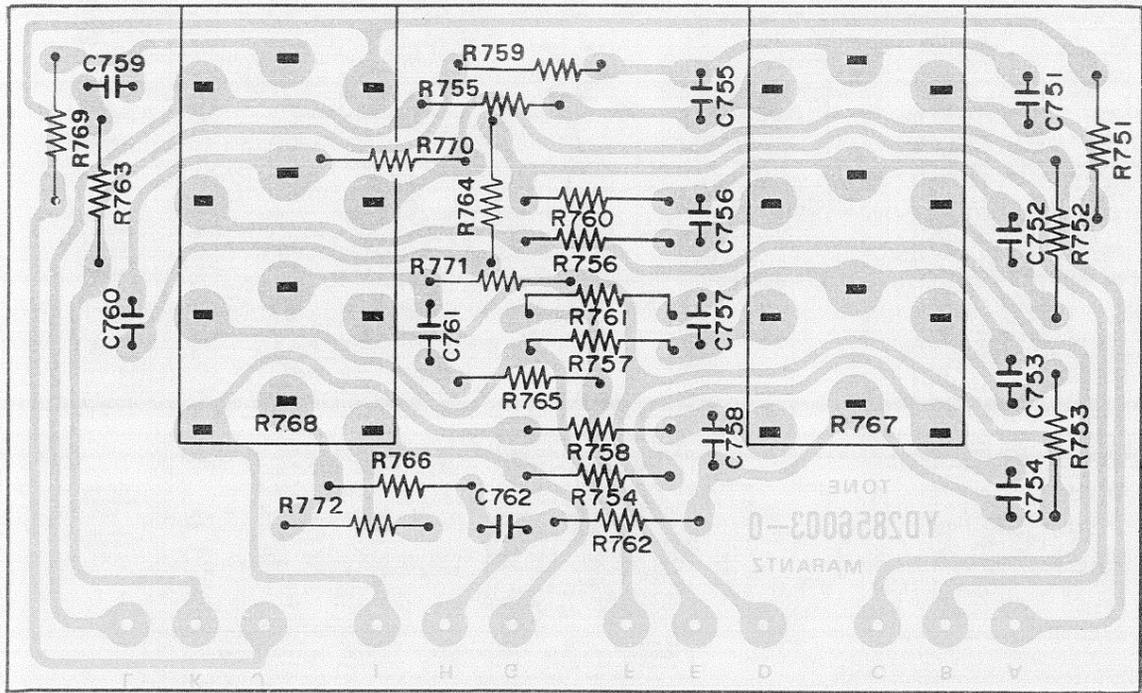


Figure 17. Tone Control Unit Assembly P750 Component Locations

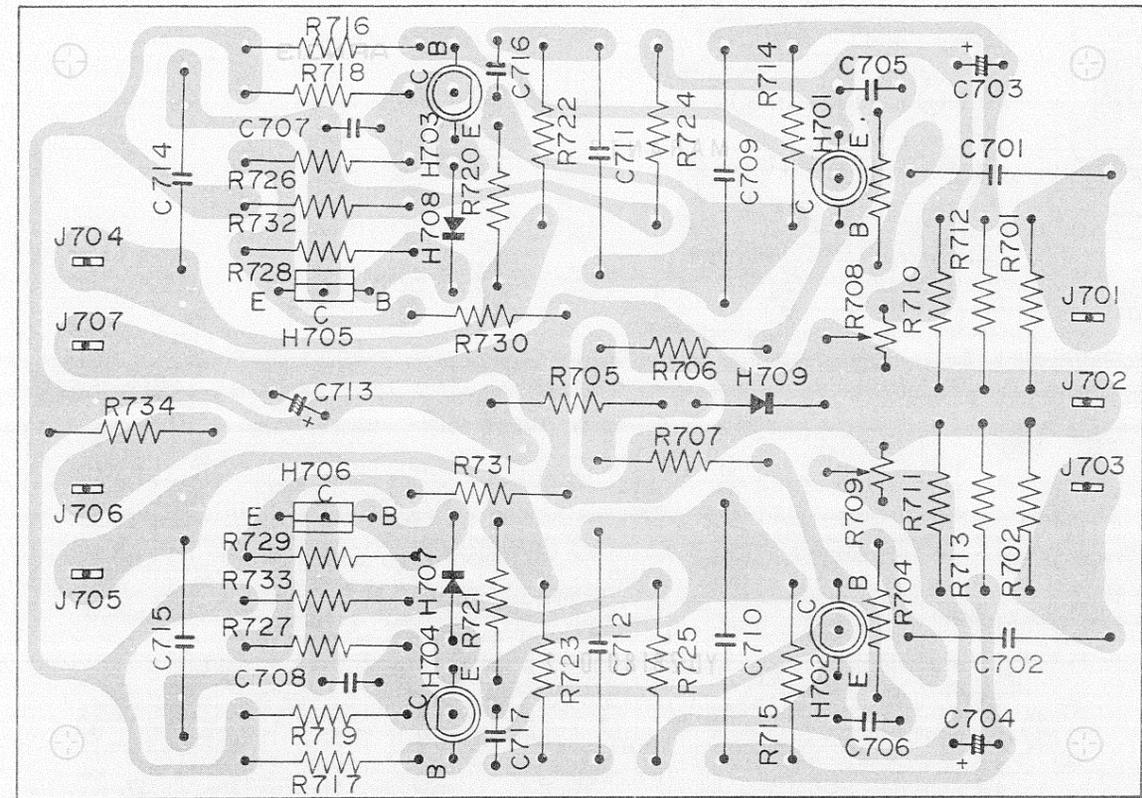


Figure 16. Phono Amplifier Assembly P700 Component Locations

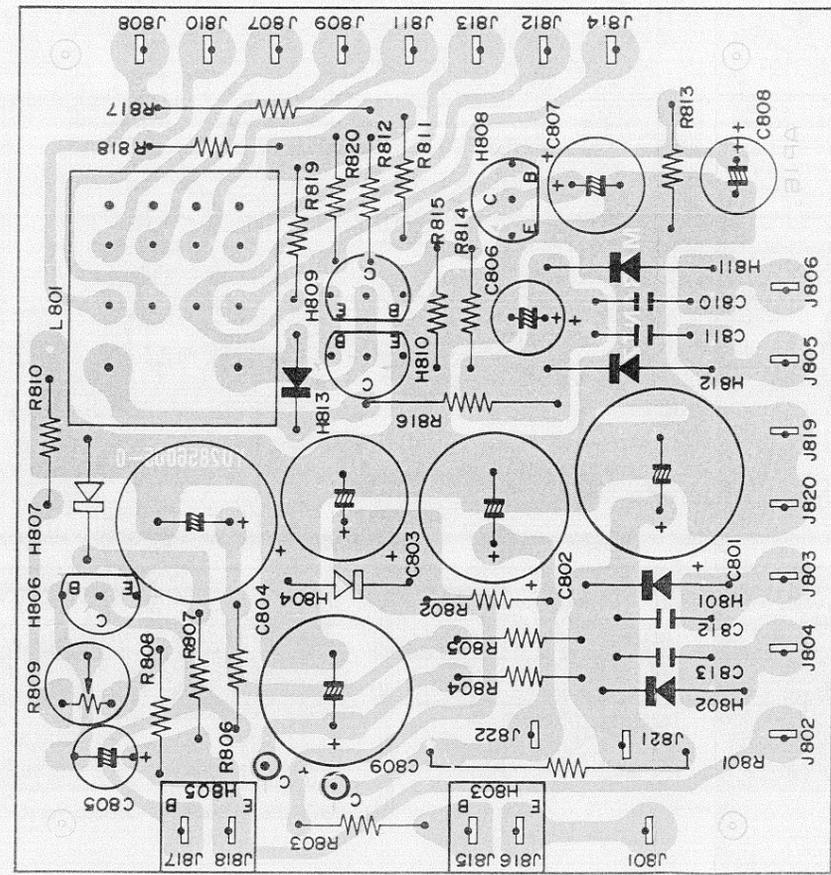


Figure 18. Power Supply Unit Assembly P800 Component Locations

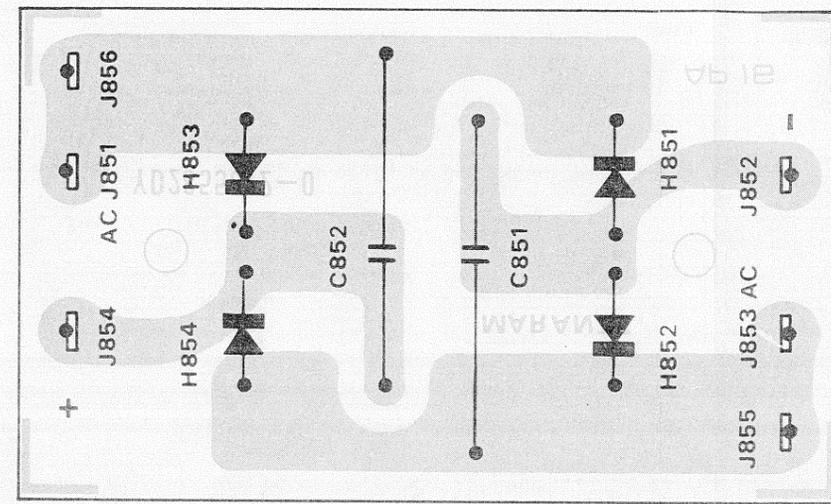


Figure 19. AC Rectifier Assembly P850 Component Locations

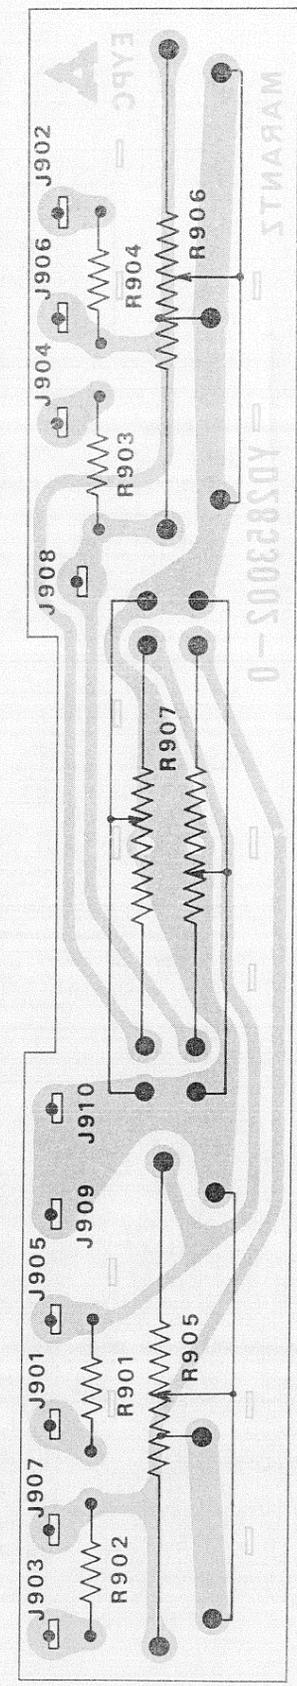


Figure 20. Balance Control Unit Assembly P900 Component Locations

PARTS LIST

REF. DESIG.	MARANTZ PART NO.	DESCRIPTION	REF. DESIG.	MARANTZ PART NO.	DESCRIPTION
P100	YD2819002 ZZ2856102	P. W. B. FM Front End P. W. B. Ass'y	J105	57271240W	Lug Eyelet
		RESISTORS (All resistors are ±5% and ¼W.)	J106	57271240W	Lug Eyelet
R101	RT0556314	56KΩ	J107	57271240W	Lug Eyelet
R102	RT0510514	1MΩ	J108	57271240W	Lug Eyelet
R103	RT0510414	100KΩ	J109	57271240W	Lug Eyelet
R104	RT0522114	220Ω	1009	273010903	Shield x 3
R105	RT0522114	220Ω	L004	LC1332002	Choke Coil
R106	RT0510214	1KΩ	L005	LC1332002	Choke Coil
R107	RT0547214	4.7KΩ	P150	YD2818002 ZZ2856112	P. W. B. AM Tuner P. W. B. Ass'y
R108	RT0522314	22KΩ			RESISTORS (All resistors are ±5% and ¼W.)
R109	RT0522314	22KΩ	R151	RT0533214	3.3KΩ
R110	RT0512214	1.2KΩ	R152	RT0522414	220KΩ
R111	RT0510114	100Ω	R153	RT0539214	3.9KΩ
R112	RT0510114	100Ω	R154	RT0510414	100KΩ
R113	RT0510114	100Ω	R155	RT0522114	220Ω
R114	RT0522314	22KΩ	R156	RT0533214	3.3KΩ
R115	RT0510114	100Ω	R157	RT0515314	15KΩ
		CAPACITORS	R158	RT0527214	2.7KΩ
C102	CT1100001	Trimming 1.5 ~ 10PF	R159	RT0582314	82KΩ
C103	CT1100002	Trimming 1.5 ~ 10PF	R160	RT0515214	1.5KΩ
C104	CT1100001	Trimming 1.5 ~ 10PF	R162	RT0518314	18KΩ
C105	CT1100001	Trimming 1.5 ~ 10PF	R163	RT0518414	180KΩ
C106	CT1100001	Trimming 1.5 ~ 10PF	R164	RT0510214	1KΩ
C107	DD1615001	Ceramic 15PF ±10%	R165	RT0515214	1.5KΩ
C108	DK1710201	Ceramic 1000PF ±20%	R166	RT0518314	18KΩ
C109	DD1105001	Ceramic 5PF ±0.5PF	R167	RT0547314	47KΩ
C110	DK1710201	Ceramic 1000PF ±20%	R168	RT0510214	1KΩ
C111	DD1615001	Ceramic 15PF ±10%	R169	RT0522114	220Ω
C112	DK1710201	Ceramic 1000PF ±20%	R170	RT0515214	1.5KΩ
C113	DK1710301	Ceramic 0.01μF ±20%	R171	RT0522214	2.2KΩ
C114	DD1001001	Ceramic 1.0PF ±0.25PF	R172	RT0547214	4.7KΩ
C115	DD1615001	Ceramic 15PF ±10%	R173	RT0522414	220KΩ
C116	DK1710301	Ceramic 0.01μF ±20%	R174	RT0522214	2.2KΩ
C117	DK1710301	Ceramic 0.01μF ±20%	R175	RT0556214	5.6KΩ
C118	DD1620003	Ceramic 20PF ±10%	R176	RT0510414	100KΩ
C119	DD1210006	Ceramic 10PF ±1PF	R177	RT0510214	1KΩ
C120	DD1615003	Ceramic 15PF ±10%	R178	RT0510114	100Ω
C121	DD1615003	Ceramic 15PF ±10%	R179	RT0522214	2.2KΩ
C122	DK1710301	Ceramic 0.01μF ±20%	R180	RT0510114	100Ω
C123	DK1710301	Ceramic 0.01μF ±20%	R181	RT0582114	820Ω
C124	DK1710301	Ceramic 0.01μF ±20%	R182	RT0556214	5.6KΩ
C125	DK1710301	Ceramic 0.01μF ±20%	R183	RT0512314	12KΩ
C127	DK1710301	Ceramic 0.01μF ±20%	R184	RT0582214	8.2KΩ
		COILS/TRANSFORMER	R185	RT0510114	100Ω
L101	LA1202603	Ant Coil	R186	RT0556214	5.6KΩ
L102	LA1202604	RF Coil	R187	RT0522214	2.2KΩ
L103	LA1202605	RF Coil	R188	RT0510114	100Ω
L104	LO1202603	OSC Coil			CAPACITORS
L105	LI1001601	I F T	C151	DF1740301	Film 0.04μF ±20%
		SEMICONDUCTORS	C152	DF1710301	Film 0.01μF ±20%
H101	HF200191A	Transistor 2SK19Y	C153	DF1740301	Film 0.04μF ±20%
H102	HF200191B	Transistor 2SK19G	C154	DD1105001	Ceramic 5PF ±0.5PF
H103	HT305351B	Transistor 2SC535B	C155	DF1740301	Film 0.04μF ±20%
		MISCELLANEOUS	C156	DF1747201	Film 0.0047μF ±20%
J101	YP1000094	Plug	C157	DF1722301	Film 0.022μF ±20%
J102	YP1000094	Plug	C158	DF6545101	Film 450PF ±5%
J103	57271240W	Lug Eyelet	C160	DF1740301	Film 0.04μF ±20%
J104	57271240W	Lug Eyelet	C161	EA1060169	Electroly 10μF 16V

REF. DESIG.	MARANTZ PART NO.	DESCRIPTION	REF. DESIG.	MARANTZ PART NO.	DESCRIPTION
C162	EA1060169	Electroly 10 μ F 16V	R206	RT0522214	2.2K Ω
C163	DF1740301	Film 0.04 μ F \pm 20%	R207	RT0510314	10K Ω
C164	EA1060169	Electroly 10 μ F 16V	R208	RT0533314	33K Ω
C165	EA1060169	Electroly 10 μ F 16V	R210	RT0539014	39 Ω
C166	EA1060169	Electroly 10 μ F 16V	R211	RT0515214	1.5K Ω
C167	DK1710201	Ceramic 1000PF \pm 20%	R212	RT0533214	3.3K Ω
C168	DF1747201	Film 4700PF \pm 20%	R213	RT0547114	470 Ω
C169	DF1722201	Film 2200PF \pm 20%	R214	RT0510214	1K Ω
C170	DF1668301	Film 0.068 μ F \pm 10%	R215	RT0510114	100 Ω
C171	EA1060169	Film 10 μ F 16V	R216	RT0515214	1.5K Ω
C172	DF1740301	Film 0.04 μ F \pm 20%	R217	RT0533214	3.3K Ω
C173	EA1060169	Electroly 10 μ F 16V	R218	RT0515114	150 Ω
C174	DF1740301	Film 0.04 μ F \pm 20%	R219	RT0510214	1K Ω
C175	EA1060169	Electroly 10 μ F 16V	R220	RT0510214	1K Ω
C176	DF1740301	Film 0.04 μ F \pm 20%	R221	RT0518314	18K Ω
C177	DF1740301	Film 0.04 μ F \pm 20%	R222	RT0510414	100K Ω
C178	EA1060169	Electroly 10 μ F 16V	R223	RT0575014	75 Ω
C179	DF1740301	Film 0.04 μ F \pm 20%	R224	RT0515114	150 Ω
C180	EA1060169	Electroly 10 μ F 16V	R225	RT0510114	150 Ω
C181	EA1060169	Electroly 10 μ F 16V	R226	RT0582114	820 Ω
C182	DD1620001	Ceramic 20PF \pm 10%	R227	RT0533214	3.3K Ω
C183	EA1060169	Electroly 10 μ F 16V	R228	RT0515114	150 Ω
C184	EA1070169	Electroly 10 μ F 16V	R229	RT0510214	1K Ω
COILS/TRANSFORMERS			R230	RT0510214	1K Ω
L151	LA1001017	RF Coil	R231	RT0515114	150 Ω
L152	LO1001042	OSC Coil	R232	RT0510414	100K Ω
L153	LI1028002	I F T	R233	RT0527314	27K Ω
L154	LI1001048	I F T	R234	RT0522314	22K Ω
SEMICONDUCTORS/PLUGS			R235	RT0510114	100 Ω
H151	HT309411B	Transistor 2SC941-0	R236	RT0522114	220 Ω
H152	HT309411B	Transistor 2SC941-0	R237	RT0582214	8.2K Ω
H153	HT3037210	Transistor 2SC372	R238	RT0515314	15K Ω
H154	HT3037210	Transistor 2SC372	R239	RT0515114	150 Ω
H155	HT306441C	Transistor 2SC644T	R240	RT0510214	1K Ω
H156	HD1000105	Diode 1N60	R241	RT0510214	1K Ω
H157	HD1000105	Diode 1N60	R242	RT0568314	68K Ω
H158	HD1000105	Diode 1N60	R243	RT0510114	100 Ω
H159	HD1000105	Diode 1N60	R244	RT0510414	100K Ω
H160	HD1000105	Diode 1N60	R245	RT0527114	270 Ω
J151	YP1000094	Plug	R246	RT0582214	8.2K Ω
J152	YP1000094	Plug	R247	RT0515314	15K Ω
J153	YP1000094	Plug	R248	RT0515114	150 Ω
J154	YP1000094	Plug	R249	RT0510214	1K Ω
J155	YP1000094	Plug	R250	RT0510214	1K Ω
J156	YP1000094	Plug	R252	RT0510414	100K Ω
J157	YP1000094	Plug	R253	RT0515114	150 Ω
J158	YP1000094	Plug	R254	RT0591214	9.1K Ω
J159	YP1000094	Plug	R256	RT0512314	12K Ω
J160	YP1000094	Plug	R257	RT0556214	5.6K Ω
J161	YP1000094	Plug	R258	RT0515314	15K Ω
J162	YP1000099	Plug	R259	RT0515114	150 Ω
P200	YD2856001 ZZ2856001	P. W. B. IF P. W. B. Ass'y	R260	RT0510214	1K Ω
RESISTORS (All resistors are \pm5% and $\frac{1}{4}$W.)			R261	RT0522314	22K Ω
R201	RT0510114	100 Ω	R262	RT0522314	22K Ω
R202	RT0510114	100 Ω	R263	RT0522114	220 Ω
R203	RT0512314	12K Ω	R264	RT0582114	820 Ω
R204	RT0547214	4.7K Ω	R265	RT0582114	820 Ω
R205	RT0510214	1K Ω	R266	RT0510314	10K Ω
			R267	RT0510314	10K Ω
			R268	RT0510114	100 Ω
			R269	RT0515314	15K Ω

REF. DESIG.	MARANTZ PART NO.	DESCRIPTION	REF. DESIG.	MARANTZ PART NO.	DESCRIPTION
R312	RT0512214	1.2K Ω			CAPACITORS
R313	RT0510214	1K Ω	C301	EA1060169	Electroly 10 μ F 16V
R314	RT0510214	1K Ω	C302	EA1060169	Electroly 10 μ F 16V
R315	RT0510214	1K Ω	C303	DF5547203	Film 4700PF \pm 5%
R316	RT0510214	1K Ω	C304	DF1647201	Film 4700PF \pm 10%
R317	RT0510314	10K Ω	C306	EA1060169	Electroly 10 μ F 16V
R318	RT0515314	15K Ω	C311	EA1060169	Electroly 10 μ F 16V
R319	RT0515114	150 Ω	C312	EA2270169	Electroly 220 μ F 16V
R320	RT0510414	100K Ω	C315	DF1522301	Film 0.022 μ F \pm 5%
			C316	DF1522301	Film 0.022 μ F \pm 5%
			C317	DF1722401	Film 0.22 μ F \pm 20%
R321	RT0522114	220 Ω			
R322	RT0522414	220K Ω	C318	DF1722401	Film 0.22 μ F \pm 20%
R323	RT0522414	220K Ω	C319	EA1060359	Electroly 10 μ F 35V
R324	RT0533014	33 Ω	C320	EA1060359	Electroly 10 μ F 35V
R325	RT0512414	120K Ω	C321	EA1060169	Electroly 10 μ F 16V
R326	RT0515314	15K Ω	C322	EA1060169	Electroly 10 μ F 16V
R327	RT0556214	5.6K Ω	C323	EA1070109	Electroly 100 μ F 10V
R328	RT0533314	33K Ω	C324	EM1040201	Electroly 0.1 μ F 20V
R329	RT0522414	220K Ω	C331	EA4750359	Electroly 0.47 μ F 35V
R330	RT0568314	68K Ω	C332	EA4750359	Electroly 0.47 μ F 35V
			C333	EV1050251	Electroly 1 μ F 25V
R331	RT0556314	56K Ω			
R332	RT0518414	180K Ω	C334	EV1050251	Electroly 1 μ F 25V
R333	RT0510414	100K Ω	C335	EA2270259	Electroly 220 μ F 25V
R334	RT0512414	120K Ω	C336	EA3360109	Electroly 33 μ F 10V
R335	RT0515314	15K Ω			COILS
R336	RT0515314	15K Ω	L301	LS1001007	MPX 19KHz Amp.
R337	RT0510414	100K Ω	L302	LS1503002	MPX 19.38KHz Block
R338	RT0510414	100K Ω	L304	LS1503001	MPX 19.67KHz Trap
R339	RT0582414	820K Ω	L305	LS3501002	MPX L. P. F.
R340	RT0582414	820K Ω			SEMICONDUCTORS/PLUGS
R341	RT0512214	1.2K Ω	H301	HT3037210	Transistor 2SC372
R342	RT0512214	1.2K Ω	H302	HT3037210	Transistor 2SC372
R343	RT0522314	22K Ω	H303	HT3037210	Transistor 2SC372
R344	RT0522314	22K Ω	H304	HT3037210	Transistor 2SC372
R345	RT0568214	6.8K Ω	H305	HT3037210	Transistor 2SC372
R346	RT0568214	6.8K Ω	H306	HT3037210	Transistor 2SC372
R347	RT0510214	1K Ω	H307	HT3037210	Transistor 2SC372
R348	RT0510214	1K Ω	H308	HF200301C	F E T 2SK30Y
R349	RT0512214	1.2K Ω	H309	HT307322A	Transistor 2SC732 Bu or Gr
R350	RT0512214	1.2K Ω	H310	HT307322A	Transistor 2SC732 Bu or Gr
R351	RT0536214	3.6K Ω			
R352	RT0536214	3.6K Ω	H311	HT104942A	Transistor 2SA494 Gr, Y
R353	RT0582314	82K Ω	H312	HT104942A	Transistor 2SA494 Gr, Y
R354	RT0522214	2.2K Ω	H313	HT306441C	Transistor 2SC644T
R355	RT0556314	56K Ω	H314	HT306441C	Transistor 2SC644T
R356	RT0510414	100K Ω	H315	HD1000105	Diode 1N60
R357	RT0547414	470K Ω	H316	HD1000105	Diode 1N60
R358	RT0547414	470K Ω	H317	HD1000302	Diode 20A90M
R359	RT0522414	220K Ω	H318	HD1000302	Diode 20A90M
R360	RT0522414	220K Ω	H319	HD1000302	Diode 20A90M
			H320	HD1000302	Diode 20A90M
R361	RT0547214	4.7K Ω			
R362	RT0547214	4.7K Ω	J301	YP1000094	Plug
R363	RT0518214	1.8K Ω	J302	YP1000094	Plug
R364	RT0556114	560 Ω	J303	YP1000094	Plug
R365	RA0502013	Trimming 5K Ω			
R366	RT0522414	220K Ω	J305	YP1000094	Plug
R367	RT0522414	220K Ω	J306	YP1000094	Plug
R368	RT0547114	470 Ω	J307	YP1000094	Plug
R369	RT0547114	470 Ω	J308	YP1000094	Plug
R374	RT0568214	6.8K Ω			
			J312	YP1000094	Plug
R375	RT0582214	8.2K Ω	J313	YP1000094	Plug

REF. DESIG.	MARANTZ PART NO.	DESCRIPTION		
J314	YP1000094	Plug		
J315	YP1000094	Plug		
P400	YD2855009 ZZ2856109	P. W. B. Pre Tone Amp. P. W. B. Ass'y		
		RESISTORS (All resistors are $\pm 5\%$ and $\frac{1}{4}W$, unless otherwise indicated.)		
R401	RT0539114	390 Ω		
R402	RT0539114	390 Ω		
R403	RT0539114	390 Ω		
R404	RT0539114	390 Ω		
R405	RT0515414	150K Ω		
R406	RT0515414	150K Ω		
R407	RT0515414	150K Ω		
R408	RT0515414	150K Ω		
R409	RT0510414	100K Ω		
R410	RT0510414	100K Ω		
R411	RT0510414	100K Ω		
R412	RT0510414	100K Ω		
R413	RT0522314	22K Ω		
R414	RT0522314	22K Ω		
R415	RT0522314	22K Ω		
R416	RT0522314	22K Ω		
R417	RT0527314	27K Ω		
R418	RT0527314	27K Ω		
R419	RT0527314	27K Ω		
R420	RT0527314	27K Ω		
R421	RT0520214	2K Ω		
R422	RT0520214	2K Ω		
R423	RT0520214	2K Ω		
R424	RT0520214	2K Ω		
R425	RT0510214	1K Ω		
R426	RT0510214	1K Ω		
R427	RT0510214	1K Ω		
R428	RT0510214	1K Ω		
R429	RT0575214	7.5K Ω		
R430	RT0575214	7.5K Ω		
R431	RT0575214	7.5K Ω		
R432	RT0575214	7.5K Ω		
R433	RN1022514	2.2M Ω	$\pm 10\%$	$\frac{1}{4}W$
R434	RN1022514	2.2M Ω	$\pm 10\%$	$\frac{1}{4}W$
R435	RN1022514	2.2M Ω	$\pm 10\%$	$\frac{1}{4}W$
R436	RN1022514	2.2M Ω	$\pm 10\%$	$\frac{1}{4}W$
R437	RT0568314	68K Ω		
R438	RT0568314	68K Ω		
R439	RT0568314	68K Ω		
R440	RT0568314	68K Ω		
R441	RT0510314	10K Ω		
R442	RT0510314	10K Ω		
R443	RT0510314	10K Ω		
R444	RT0510314	10K Ω		
R445	RT0510314	10K Ω		
R446	RT0510314	10K Ω		
R447	RT0510314	10K Ω		
R448	RT0510314	10K Ω		
R449	RT0522114	220 Ω		
R450	RT0522114	220 Ω		
R451	RT0522114	220 Ω		
R452	RT0522114	220 Ω		
R453	RT0510114	100 Ω		
R454	RT0510414	100K Ω		

REF. DESIG.	MARANTZ PART NO.	DESCRIPTION		
R455	RT0510414	100K Ω		
R456	RT0510414	100K Ω		
R457	RT0510414	100K Ω		
		CAPACITORS		
C401	DF1722405	Film 0.22 μF	$\pm 20\%$	50V
C402	DF1722405	Film 0.22 μF	$\pm 20\%$	50V
C403	DF1722402	Film 0.22 μF	$\pm 20\%$	50V
C404	DF1722402	Film 0.22 μF	$\pm 20\%$	50V
C405	EE1050501	Electroly 1 μF	$\pm 20\%$	50V
C406	EE1050501	Electroly 1 μF	$\pm 20\%$	50V
C407	EE1050501	Electroly 1 μF	$\pm 20\%$	50V
C408	EE1050501	Electroly 1 μF	$\pm 20\%$	50V
C409	EE3350501	Electroly 3.3 μF	$\pm 20\%$	50V
C410	EE3350501	Electroly 3.3 μF	$\pm 20\%$	50V
C411	EE3350501	Electroly 3.3 μF	$\pm 20\%$	50V
C412	EE3350501	Electroly 3.3 μF	$\pm 20\%$	50V
C413	EA1060359	Electroly 10 μF	35V	
C414	EA1060359	Electroly 10 μF	35V	
C415	EA1060359	Electroly 10 μF	35V	
C416	EA1060359	Electroly 10 μF	35V	
C417	EE4740501	Electroly 0.47 μF	$\pm 20\%$	50V
C418	EE4740501	Electroly 0.47 μF	$\pm 20\%$	50V
C419	EE4740501	Electroly 0.47 μF	$\pm 20\%$	50V
C420	EE4740501	Electroly 0.47 μF	$\pm 20\%$	50V
C421	EE1060351	Electroly 10 μF	$\pm 20\%$	35V
C422	EE1060351	Electroly 10 μF	$\pm 20\%$	35V
C423	EE1060351	Electroly 10 μF	$\pm 20\%$	35V
C424	EE1060351	Electroly 10 μF	$\pm 20\%$	35V
C425	EQ1060161	Electroly 10 μF	$\pm 30\%$	16V
C426	EQ1060161	Electroly 10 μF	$\pm 30\%$	16V
C427	EQ1060161	Electroly 10 μF	$\pm 30\%$	16V
C428	EQ1060161	Electroly 10 μF	$\pm 30\%$	16V
C429	EA3370359	Electroly 330 μF	+50% -10%	35V
C430	EA1070169	Electroly 100 μF	+50% -10%	16V
C431	EA1070169	Electroly 100 μF	+50% -10%	16V
C432	EA1070169	Electroly 100 μF	+50% -10%	16V
C433	EA1070169	Electroly 100 μF	+50% -10%	16V
		SEMICONDUCTORS/PLUGS		
H401	HT313271T	Transistor	2SC1327(T)	
H402	HT313271T	Transistor	2SC1327(T)	
H403	HT313271T	Transistor	2SC1327(T)	
H404	HT313271T	Transistor	2SC1327(T)	
H405	HT107632A	Transistor	2SA763W	4 or 5
H406	HT107632A	Transistor	2SA763W	4 or 5
H407	HT107632A	Transistor	2SA763W	4 or 5
H408	HT107632A	Transistor	2SA763W	4 or 5
H409	HT313272A	Transistor	2SC1327	(S or T)
H410	HT313272A	Transistor	2SC1327	(S or T)
H411	HT313272A	Transistor	2SC1327	(S or T)
H412	HT313272A	Transistor	2SC1327	(S or T)
H413	HT107632A	Transistor	2SA763W	4 or 5
H414	HT107632A	Transistor	2SA763W	4 or 5
H415	HT107632A	Transistor	2SA763W	4 or 5
H416	HT107632A	Transistor	2SA763W	4 or 5
J401	YP1000094	Plug		
J402	YP1000094	Plug		
J403	YP1000094	Plug		
J404	YP1000094	Plug		
J405	YP1000094	Plug		

REF. DESIG.	MARANTZ PART NO.	DESCRIPTION	REF. DESIG.	MARANTZ PART NO.	DESCRIPTION
J406	YP1000094	Plug	C477	EA4750359	Electroly 4.7 μ F 35V
J407	YP1000094	Plug	C478	DK1810402	Ceramic 0.1 μ F +100% -0%
J408	YP1000094	Plug	C479	EA1060169	Electroly 10 μ F 16V
J409	YP1000094	Plug	C480	DK1710301	Ceramic 0.01 μ F \pm 20%
J410	YP1000094	Plug			
J411	YP1000094	Plug	C481	DK1710301	Ceramic 0.01 μ F \pm 20%
J412	YP1000094	Plug	C482	DK1840302	Ceramic 0.04 μ F +80% -20%
J413	YP1000094	Plug			
J414	YP1000094	Plug	L470	LC2105001	Choke Coil 1mH
J415	YP1000094	Plug			
J416	YP1000094	Plug			
J417	YP1000094	Plug			
J418	YP1000094	Plug			
J419	YP1000094	Plug			
J420	YP1000094	Plug			
J421	YP1000094	Plug			
J422	YP1000094	Plug			
J423	YP1000094	Plug			
J424	YP1000094	Plug			
J425	YP1000094	Plug			
J426	YP1000094	Plug			
J427	YP1000094	Plug			
P470	YD2856002 ZZ2856002	P. W. B. Noise, DC Amp. P. W. B. Ass'y	J470	YP1000094	Plug
		RESISTORS (All resistors are \pm5% and $\frac{1}{4}$W, unless otherwise indicated.)	J471	YP1000094	Plug
R471	RT0556214	5.6K Ω	J472	YP1000094	Plug
R472	RT0510114	100 Ω	J473	YP1000094	Plug
R473	RT0527314	27K Ω	J474	YP1000094	Plug
R474	RT0510414	100K Ω	J476	YP1000094	Plug
R475	RT0510214	1K Ω	J478	YP1000094	Plug
R476	RT0533314	33K Ω	J479	YP1000094	Plug
R477	RT0533314	33K Ω	J480	YP1000094	Plug
R479	RT0533314	33K Ω	J481	YP1000094	Plug
R480	RT0533214	3.3K Ω	J482	YP1000094	Plug
R481	RA0103020	Trimming 10K Ω \pm 30%	J484	YP1000094	Plug
R482	RT0522414	220K Ω	J485	YP1000094	Plug
R483	RT0510114	100 Ω	P500	YD2851001 ZZ2856101	P. W. B. Vari-Matrix P. W. B. Ass'y
R484	RT0510114	100 Ω			
R485	RT0515314	15K Ω			
R486	RT0533414	330K Ω			
R487	RA0103020	Trimming 10K Ω \pm 30%			
R488	RT0522214	2.2K Ω			
R489	RT0510314	10K Ω			
R491	RT0527414	270K Ω			
R492	RT0510114	100 Ω			
R493	RT0515314	15K Ω			
R494	RT0512314	12K Ω			
R495	RT0527414	270K Ω			
R496	RT0510314	10K Ω			
R497	RT0522114	220 Ω			
R498	RT0510114	100 Ω			
		CAPACITORS/COIL			
C471	DD1615001	Ceramic 15PF \pm 10%	R501	RT0515414	150K Ω
C472	DF1668301	Film 0.068 μ F \pm 10%	R502	RT0515414	150K Ω
C473	DF1740301	Film 0.04 μ F \pm 20%	R503	RT0556314	56K Ω
C474	EA1060169	Electroly 10 μ F 16V	R504	RT0556314	56K Ω
C475	DK1840302	Ceramic 0.04 μ F +80% -20%	R505	RT0522414	220K Ω
C476	DK1810402	Ceramic 0.1 μ F +80% -20%	R506	RT0522414	220K Ω
			R507	RT0533414	330K Ω
			R508	RT0533414	330K Ω
			R509	RT0556214	5.6K Ω
			R510	RT0556214	5.6K Ω
			R511	RT0556214	5.6K Ω
			R512	RT0556214	5.6K Ω
			R513	RT0568214	6.8K Ω
			R514	RT0568214	6.8K Ω
			R515	RT0568214	6.8K Ω
			R516	RT0568214	6.8K Ω
			R517	RT0547314	47K Ω
			R518	RT0547314	47K Ω
			R519	RT0547314	47K Ω
			R520	RT0547314	47K Ω

REF. DESIG.	MARANTZ PART NO.	DESCRIPTION
R521	RT0547414	470K Ω
R522	RT0547414	470K Ω
R523	RT0568314	68K Ω
R524	RT0568314	68K Ω
R525	RT0512514	1.2M Ω
R526	RT0512514	1.2M Ω
R527	RT0510214	1K Ω
R528	RT0510214	1K Ω
R529	RT0522314	22K Ω
R530	RT0522314	22K Ω
R531	RT0515314	15K Ω
R532	RT0515314	15K Ω
R533	RT0510414	100K Ω
R534	RT0510414	100K Ω
R535	RT0510214	1K Ω
R536	RT0510214	1K Ω
R537	RT0522114	220 Ω
PLUGS		
J501	YP1000094	
J502	YP1000094	
J503	YP1000094	
J504	YP1000094	
J505	YP1000094	
J506	YP1000094	
J507	YP1000094	
J508	YP1000094	
J509	YP1000094	
J510	YP1000094	
J511	YP1000094	
J512	YP1000094	
CAPACITORS		
C501	EE4740501	Electroly 0.47 μ F \pm 20% 50V
C502	EE4740501	Electroly 0.47 μ F \pm 20% 50V
C503	EE3350501	Electroly 3.3 μ F \pm 20% 50V
C504	EE3350501	Electroly 3.3 μ F \pm 20% 50V
C505	EE3350501	Electroly 3.3 μ F \pm 20% 50V
C506	EE3350501	Electroly 3.3 μ F \pm 20% 50V
C507	DF1747305	Film 0.047 μ F \pm 20% 50V
C508	DF1747305	Film 0.047 μ F \pm 20% 50V
C509	DF1747305	Film 0.047 μ F \pm 20% 50V
C510	DF1747305	Film 0.04 μ F \pm 20% 50V
C511	EE3350501	Electroly 3.3 μ F \pm 20% 50V
C512	EE3350501	Electroly 3.3 μ F \pm 20% 50V
C513	EE3350501	Electroly 3.3 μ F \pm 20% 50V
C514	EE3350501	Electroly 3.3 μ F \pm 20% 50V
C515	EA2260359	Electroly 22 μ F +100% -10% 35V
C516	EA2260359	Electroly 22 μ F +100% -10% 35V
C517	DD1650101	Ceramic 500PF \pm 10% 50V
C518	DD1650101	Ceramic 500PF \pm 10% 50V
C519	EA1070359	Electroly 100 μ F +100% -10% 35V
SEMICONDUCTORS		
H501	HT313271S	Transistor 2SC1327 S
H502	HT313271S	Transistor 2SC1327 S
H503	HT313271S	Transistor 2SC1327 S
H504	HT313271S	Transistor 2SC1327 S
H505	HT106401L	Transistor 2SA640 L
H506	HT106401L	Transistor 2SA640 L
MISCELLANEOUS		
1114	281910101	Support x 2
1126	51100306S	B. H. M. Screw x 10
1127	511003069	B. H. M. Screw x 4

REF. DESIG.	MARANTZ PART NO.	DESCRIPTION
P600	YD2855004 ZZ2856114	P. W. B. Main Amp. x 2 P. W. B. Ass'y
RESISTORS (All resistors are \pm5% and $\frac{1}{4}$W, unless otherwise indicated.)		
R601	RT0510214	1K Ω x 2
R602	RT0510214	1K Ω x 2
R603	RT0533314	33K Ω x 2
R604	RT0533314	33K Ω x 2
R605	RT0568214	6.8K Ω x 2
R606	RT0568214	6.8K Ω x 2
R607	RT0510214	1K Ω x 2
R608	RT0510214	1K Ω x 2
R609	RT0533314	33K Ω x 2
R610	RT0533314	33K Ω x 2
R611	RT0515314	15K Ω x 2
R612	RT0515314	15K Ω x 2
R613	RA0502017	Trimming 5K Ω (B) x 2
R614	RA0502017	Trimming 5K Ω (B) x 2
R615	RT0522414	220K Ω x 2
R616	RT0522414	220K Ω x 2
R617	RT0510214	1K Ω x 2
R618	RT0510214	1K Ω x 2
R619	RT0533314	33K Ω x 2
R620	RT0533314	33K Ω x 2
R621	RC1010212	1K Ω \pm 10% $\frac{1}{4}$ W x 2
R622	RC1018212	1.8K Ω \pm 10% $\frac{1}{4}$ W x 2
R623	RC1018212	1.8K Ω \pm 10% $\frac{1}{4}$ W x 2
R624	RC1047212	4.7K Ω \pm 10% $\frac{1}{4}$ W x 2
R625	RC1047212	4.7K Ω \pm 10% $\frac{1}{4}$ W x 2
R628	RA0501010	Trimming 500 Ω (B) x 2
R629	RA0501010	Trimming 500 Ω (B) x 2
R630	RC1010012	10 Ω \pm 10% $\frac{1}{4}$ W x 2
R631	RC1010012	10 Ω \pm 10% $\frac{1}{4}$ W x 2
R632	GF0518114	180 Ω x 2
R633	GF0518114	180 Ω x 2
R634	GF0527114	270 Ω x 2
R635	GF0527114	270 Ω x 2
R636	GF0515214	1.5K Ω x 2
R637	GF0515214	1.5K Ω x 2
R638	GF0515214	1.5K Ω x 2
R639	GF0515214	1.5K Ω x 2
R640	RT0547214	4.7K Ω x 2
R641	RT0547214	4.7K Ω x 2
R642	GF0512114	120 Ω x 2
R643	GF0512114	120 Ω x 2
R644	GF0512114	120 Ω x 2
R645	GF0512114	120 Ω x 2
R646	GT0510002	10 Ω \pm 5% 2W x 2
R647	GT0510002	10 Ω \pm 5% 2W x 2
R648	GF0510012	10 Ω \pm 5% $\frac{1}{4}$ W x 2
R649	GF0510012	10 Ω \pm 5% $\frac{1}{4}$ W x 2
R650	GF0522112	220 Ω \pm 5% $\frac{1}{4}$ W x 2
R651	GF0522112	220 Ω \pm 5% $\frac{1}{4}$ W x 2
R652	GF0510012	10 Ω \pm 5% $\frac{1}{4}$ W x 2
R653	GF0510012	10 Ω \pm 5% $\frac{1}{4}$ W x 2
R654	GF0522112	220 Ω \pm 5% $\frac{1}{4}$ W x 2
R655	GF0522112	220 Ω \pm 5% $\frac{1}{4}$ W x 2
R656	RW1000503	0.5 Ω \pm 10% 3W x 2
R657	RW1000503	0.5 Ω \pm 10% 3W x 2
R658	RW1000503	0.5 Ω \pm 10% 3W x 2
R659	RW1000503	0.5 Ω \pm 10% 3W x 2

REF. DESIG.	MARANTZ PART NO.	DESCRIPTION			
R660	RC1039212	3.9K Ω	$\pm 10\%$	$\frac{1}{2}W$	x2
R661	RC1039212	3.9K Ω	$\pm 10\%$	$\frac{1}{2}W$	x2
R662	RC1010112	100 Ω	$\pm 10\%$	$\frac{1}{2}W$	x2
R663	RC1010112	100 Ω	$\pm 10\%$	$\frac{1}{2}W$	x2
R664	RC1002212	2.2 Ω	$\pm 10\%$	$\frac{1}{2}W$	x2
R665	RC1002212	2.2 Ω	$\pm 10\%$	$\frac{1}{2}W$	x2
R666	RT0518114	180 Ω	x2		
R667	RT0518114	180 Ω	x2		
CAPACITORS/COILS					
C601	EE3350251	Electroly	3.3 μF	$\pm 20\%$	25V x2
C602	EE3350251	Electroly	3.3 μF	$\pm 20\%$	25V x2
C603	DD1620101	Ceramic	200PF	$\pm 10\%$	x2
C604	DD1620101	Ceramic	200PF	$\pm 10\%$	x2
C605	EA1070259	Electroly	100 μF		25V x2
C606	EA1070259	Electroly	100 μF		25V x2
C607	DD1103050	Ceramic	3PF	$\pm 0.25PF$	500V x2
C608	DD1103050	Ceramic	3PF	$\pm 0.25PF$	500V x2
C609	EA4760509	Electroly	47 μF		50V x2
C610	EA4760509	Electroly	47 μF		50V x2
C611	EE4760162	Electroly	47 μF		16V x2
C612	EE4760162	Electroly	47 μF		16V x2
C613	EA2270509	Electroly	100 μF		50V x2
C614	EA2270509	Electroly	100 μF		50V x2
C615	DF1768301	Film	0.068 μF	$\pm 20\%$	x2
C616	DF1768301	Film	0.068 μF	$\pm 20\%$	x2
C617	DF1722301	Film	0.022 μF	$\pm 20\%$	x2
C618	DF1722301	Film	0.022 μF	$\pm 20\%$	x2
C619	DK1610150	Ceramic	100PF	$\pm 10\%$	x2
C620	DK1610150	Ceramic	100PF	$\pm 10\%$	x2
C621	DF1710452	Film	0.1 μF		200V x2
C622	DF1710452	Film	0.1 μF		200V x2
L601	LL2380612	Choke Coil			x2
L602	LL2380612	Choke Coil			x2
SEMICONDUCTORS					
H601	HT106401L	Transistor	2SA640		Lx2
H602	HT106401L	Transistor	2SA640		Lx2
H603	HT106401L	Transistor	2SA640		Lx2
H604	HT106401L	Transistor	2SA640		Lx2
H605	HT308751L	Transistor	2SC875		Cx2
H606	HT308751L	Transistor	2SC875		Cx2
H607	HT309451Q	Transistor	2SC945		Qx2
H608	HT309451Q	Transistor	2SC945		Qx2
H609	HT107331Q	Transistor	2SA733		Qx2
H610	HT107331Q	Transistor	2SA733		Qx2
H611	HT106821B	IC	2SA682		O or Y
H612	HT106821B	IC	2SA682		O or Y
H613	HT313821B	IC	2SC1382		O or Y
H614	HT313821B	IC	2SC1382		O or Y
H615	HD3003009	Diode	Zenner	WZ-177	x2
H616	HV0000312	Varistor	1S1212		x2
H617	HV0000312	Varistor	1S1212		x2
H618	HV0000110	Varisotr	RV		x2
H619	HV0000110	Varistor	RV		x2
H620	HV0000110	Varistor	RV		x2
H621	HV0000110	Varistor	RV		x2
H622	HD1000101	Diode	1N34A		x2
H623	HD1000101	Diode	1N34A		x2
H624	HD1000101	Diode	1N34A		x2
H625	HD1000101	Diode	1N34A		x2
H627	HH0000912	Thermistor	22D47	(200 Ω)	x2
H628	HH0000912	Thermistor	22D47	(200 Ω)	x2
MISCELLANEOUS					
J601	YP1000099	Plug			x2
J602	YP1000099	Plug			x2
J603	YP1000094	Plug			x2
J604	YP1000094	Plug			x2
J605	YP1000094	Plug			x2
J606	YP1000094	Plug			x2
J607	YP1000099	Plug			x2
J608	YP1000099	Plug			x2
J609	YP1000099	Plug			x2
J610	YP1000099	Plug			x2
J611	YP1000099	Plug			x2
J612	YP1000099	Plug			x2
J613	YP1000099	Plug			x2
J614	YP1000099	Plug			x2
J615	YP1000099	Plug			x2
J616	YP1000099	Plug			x2
J617	YP1000099	Plug			x2
J618	YP1000099	Plug			x2
J619	YP1000099	Plug			x2
J620	YP1000099	Plug			x2
J621	YP1000099	Plug			x2
J622	YP1000099	Plug			x2
J624	YP1000099	Plug			x2
J625	YP1000099	Plug			x2
J626	YP1000099	Plug			x2
J627	YP1000099	Plug			x2
J628	YP1000099	Plug			x2
J629	YP1000099	Plug			x2
J630	YP1000099	Plug			x2
1110	285526702	Heat Sink			x4
1112	281811806	Spacer			x4
1132	54022601E	Flat Washer			x8
1131	51102606E	B. H. M. Screw			x8
P580	YD2855006 ZZ2856106	P. W. B. Temp Comp			x2
		P. W. B. Ass'y			
SEMICONDUCTORS					
H581	HV0000212	Varistor	SV-3A		x2
H582	HV0000212	Varistor	SV-3A		x2
MISCELLANEOUS					
1118	285605610	Buffer			x2
1104	285526701	Heat Sink			x2
1106	281810104	Support			x8
1108	281816007	Bracket			x4
1116	285510101	Support			x4
1129	51100314E	B. H. M. Screw			x12
1128	51570306B	P. H. Tapt Screw			x12
H001	HT314031A	Transistor	2SC1403		R or O
H002	HT314031A	Transistor	2SC1403		R or O
H003	HT314031A	Transistor	2SC1403		R or O
H004	HT314031A	Transistor	2SC1403		R or O
H005	HT314031A	Transistor	2SC1403		R or O
H006	HT314031A	Transistor	2SC1403		R or O

REF. DESIG.	MARANTZ PART NO.	DESCRIPTION			
H007	HT314031A	Transistor	2SC1403	R or O	
H008	HT314031A	Transistor	2SC1403	R or O	
J021	YJ0500019	Socket			
J022	YJ0500019	Socket			
J023	YJ0500019	Socket			
J024	YJ0500019	Socket			
J025	YJ0500019	Socket			
J026	YJ0500019	Socket			
J027	YJ0500019	Socket			
J028	YJ0500019	Socket			
P700	YD2818010 ZZ2856110	P. W. B.	Phono Amp.		
		P. W. B. Ass'y			
RESISTORS (All resistors are $\pm 5\%$ and $\frac{1}{4}W$, unless otherwise indicated.)					
R701	RT0547314	47K Ω			
R702	RT0547314	47K Ω			
R703	RT0547114	470 Ω			
R704	RT0547114	470 Ω			
R705	RT0533314	33K Ω			
R706	RN1010514	1M Ω	$\pm 10\%$	$\frac{1}{4}W$	
R707	RN1010514	1M Ω	$\pm 10\%$	$\frac{1}{4}W$	
R708	RA0104012	Trimming	100K Ω	(B)	
R709	RA0104012	Trimming	100K Ω	(B)	
R710	RT0527314	27K Ω			
R711	RT0527314	27K Ω			
R712	RT0562114	620 Ω			
R713	RT0562114	620 Ω			
R714	RT0522514	2.2M Ω			
R715	RT0522514	2.2M Ω			
R716	RN1022514	2.2M Ω	$\pm 10\%$	$\frac{1}{4}W$	
R717	RN1022514	2.2M Ω	$\pm 10\%$	$\frac{1}{4}W$	
R718	RT0527414	270K Ω			
R719	RT0527414	270K Ω			
R720	RT0547314	47K Ω			
R721	RT0547314	47K Ω			
R722	RT0522214	2.2K Ω			
R723	RT0522214	2.2K Ω			
R724	RN0562414	620K Ω			
R725	RN0562414	620K Ω			
R726	RT0510414	100K Ω			
R727	RT0510414	100K Ω			
R728	RT0547314	47K Ω			
R729	RT0547314	47K Ω			
R730	RT0547014	47 Ω			
R731	RT0547014	47 Ω			
R732	RT0533214	3.3K Ω			
R733	RT0533214	3.3K Ω			
R734	RT0510114	100 Ω			
CAPACITORS/PLUGS					
C701	DF1747401	Film	0.47 μF	$\pm 20\%$	50V
C702	DF1747401	Film	0.47 μF	$\pm 20\%$	50V
C703	EE2260251	Electroly	22 μF	$\pm 20\%$	25V
C704	EE2260251	Electroly	22 μF	$\pm 20\%$	25V
C705	DD1540004	Ceramic	40PF	$\pm 5\%$	50V
C706	DD1540004	Ceramic	40PF	$\pm 5\%$	50V
C707	DD1104001	Ceramic	4PF	$\pm 0.5PF$	50V
C708	DD1104001	Ceramic	4PF	$\pm 0.5PF$	50V
C709	DF6556201	Film	5600PF	$\pm 5\%$	50V
C710	DF6556201	Film	5600PF	$\pm 5\%$	50V

REF. DESIG.	MARANTZ PART NO.	DESCRIPTION			
C711	DF6516201	Film	1600PF	$\pm 5\%$	50V
C712	DF6516201	Film	1600PF	$\pm 5\%$	50V
C713	EA1070509	Electroly	100 μF	50V	
C714	DF1747401	Film	0.47 μF	$\pm 20\%$	50V
C715	DF1747401	Film	0.47 μF	$\pm 20\%$	50V
C716	DD1650001	Ceramic	50PF	$\pm 10\%$	50V
C717	DD1650001	Ceramic	50PF	$\pm 10\%$	50V
J701	YP1000099	Plug			
J702	YP1000099	Plug			
J703	YP1000099	Plug			
J704	YP1000099	Plug			
J705	YP1000099	Plug			
J706	YP1000099	Plug			
J707	YP1000099	Plug			
SEMICONDUCTORS					
H701	HT313441E	Transistor	2SC1344E		
H702	HT313441E	Transistor	2SC1344E		
H703	HT313441D	Transistor	2SC1344D		
H704	HT313441D	Transistor	2SC1344D		
H705	HT304580R	Transistor	2SC458LG A(B)		
H706	HT304580R	Transistor	2SC458LG A(B)		
H707	HD2000206	Diode	1S1212		
H708	HD2000206	Diode	1S1212		
H709	HV0000206	Varistor	VD1212		
P800	YD2856005 ZZ2856005	P. W. B. Power Supply/SPK. Protector P. W. B. Ass'y			
RESISTORS					
R801	GS1015105	150 Ω	$\pm 10\%$	$\frac{1}{2}W$	
R802	RC1033212	3.3K Ω	$\pm 10\%$	$\frac{1}{4}W$	
R803	RC1010012	10 Ω	$\pm 10\%$	$\frac{1}{2}W$	
R804	GF0547012	47 Ω	$\pm 5\%$	$\frac{1}{4}W$	
R805	RT0547214	4.7K Ω	$\pm 5\%$	$\frac{1}{4}W$	
R806	RT0515214	1.5K Ω	$\pm 5\%$	$\frac{1}{4}W$	
R807	RC1039212	3.9K Ω	$\pm 10\%$	$\frac{1}{2}W$	
R808	RT0527314	27K Ω	$\pm 5\%$	$\frac{1}{4}W$	
R809	RA0502013	Trimming	4.7K Ω	(B)	
R810	RT0556214	5.6K Ω	$\pm 5\%$	$\frac{1}{4}W$	
R811	RT0510314	10K Ω	$\pm 5\%$	$\frac{1}{4}W$	
R812	RT0522314	22K Ω	$\pm 5\%$	$\frac{1}{4}W$	
R813	RT0568214	6.8K Ω	$\pm 5\%$	$\frac{1}{4}W$	
R814	RT0522414	220K Ω	$\pm 5\%$	$\frac{1}{4}W$	
R815	RT0539314	39K Ω	$\pm 5\%$	$\frac{1}{4}W$	
R816	RJ1010101	100 Ω	$\pm 10\%$	1W	
R817	RC1056212	5.6K Ω	$\pm 10\%$	$\frac{1}{2}W$	
R818	RC1056212	5.6K Ω	$\pm 10\%$	$\frac{1}{2}W$	
R819	RC1056212	5.6K Ω	$\pm 10\%$	$\frac{1}{2}W$	
R820	RC1056212	5.6K Ω	$\pm 10\%$	$\frac{1}{2}W$	
CAPACITORS					
C801	EA4770631	Electroly	470 μF	+100%	-10% 63V
C802	EA3370509	Electroly	330 μF	+100%	-10% 50V
C803	EA4770169	Electroly	470 μF	+100%	-10% 16V
C804	EA3370509	Electroly	330 μF	+100%	-10% 50V
C805	EA3350509	Electroly	3.3 μF	+100%	-10% 50V
C806	EA1060509	Electroly	10 μF	+100%	-10% 50V
C807	EA2270109	Electroly	220 μF	+100%	-10% 10V
C808	EA1070109	Electroly	100 μF	+50%	-10% 10V
C809	EA2270631	Electroly	220 μF	+50%	-10% 63V
C810	DK1810351	Ceramic	0.01 μF	+50%	-10% 500V
C811	DK1810351	Ceramic	0.01 μF	+50%	-10% 500V
C812	DK1810351	Ceramic	0.01 μF	+50%	-10% 500V
C813	DK1810351	Ceramic	0.01 μF	+50%	-10% 500V

REF. DESIG.	MARANTZ PART NO.	DESCRIPTION	REF. DESIG.	MARANTZ PART NO.	DESCRIPTION
SEMICONDUCTORS			J017	YJ0100055	Jack Headphone
H801	HD2000413	Diode SIB-01-02	R014	RJ1047001	Resistor 47Ω ±10% 1W
H802	HD2000413	Diode SIB-01-02	R015	RJ1047001	Resistor 47Ω ±10% 1W
H804	HD3002109	Diode BZ-140 (14V, 1W)	J018	YJ0100055	Jack Headphone
H806	HT309452A	Transistor 2SC945 Q or R	R016	RJ1047001	Resistor 47Ω ±10% 1W
H807	HD3002309	Diode WZ-071 7.3V±0.4V0.5W	R017	RJ1047001	Resistor 47Ω ±10% 1W
H808	HT309452A	Transistor 2SC945 Q or R	M009	IM1104202	DC Meter FM Tuning
H809	HT309452A	Transistor 2SC945 Q or R	M010	IM1104203	Meter Signal (FM/AM)
H810	HT309452A	Transistor 2SC945 Q or R	C002	EA3360109	Capacitor Electroly 33μF 10V
H811	HD2000413	Diode SIB-01-02	J006	YJ0700006	Jack SQ Decoder
H812	HD2000413	Diode SIB-01-02	1221	285110450	Retainer K
H813	HV0000110	Diode RV	1322	51100312S	B. H. M. Screw (3φ x 12) x2
MISCELLANEOUS			0512	285310901	Shield
L801	LY4024003	Relay 24V DC 4Circuit	0513	282112001	Insulator
J801	YP1000097	Plug	0429	281805101	Guide
J820			0430	281910701	Sheet
36	62031650W	Lug	0432	281926251	Pulley K
P850	YD2855012	P. W. B. AC Rectifier	0731	51100305A	B. H. M. Screw (3φ x 5) x2
	ZZ2856212	P. W. B. Ass'y	P550	YD2856004	P. W. B. Loudness Hi Fil.Main/ Remote Spk. Switch
SEMICONDUCTORS/CAPACITORS				ZZ2856004	P. W. B. Ass'y
H851	HD2000601	Diode UIIC	RESISTORS (All resistors are ±5% and ¼W, unless otherwise indicated.)		
H852	HD2000601	Diode UIIC	R551	RT0524314	24KΩ
H853	HD2000701	Diode U12C	R552	RT0524314	24KΩ
H854	HD2000701	Diode U12C	R553	RT0524314	24KΩ
C851	DF2722350	Film 0.022μF ±20% 400V	R554	RT0524314	24KΩ
C852	DF2722350	Film 0.022μF ±20% 400V	R555	RT0556314	56KΩ
MISCELLANEOUS			R556	RT0556314	56KΩ
J851	YP1000099	Plug	R557	RT0556314	56KΩ
J856			R558	RT0556314	56KΩ
0403	285316050	Bracket K	R559	RT0547214	4.7KΩ
0409	281816003	Bracket	R560	RT0547214	4.7KΩ
0410	281816004	Bracket	R561	RT0547214	4.7KΩ
0628	257710602	Bearing	R562	RT0547214	4.7KΩ
0629	141511801	Spacer	R563	RT0510514	1MΩ
0631	51040306A	F. H. M. Screw (3φ x 6) x2	R564	RT0510514	1MΩ
36	138200503	Clamper x4	R565	RT0510514	1MΩ
J040	YLO103021	Terminal 3P	R566	RT0510514	1MΩ
0518	285610701	Sheet	R567	RJ1010102	100Ω ±10% 2W
0704	51100305A	B. H. M. Screw (3φ x 5) x6	R568	RJ1010102	100Ω ±10% 2W
0706	51102605A	B. H. M. Screw (2.6φ x 3) x6	R569	RJ1010102	100Ω ±10% 2W
0708	51102605A	B. H. M. Screw (2.6φ x 5) x2	R570	RJ1010102	100Ω ±10% 2W
0714	51100406A	B. H. M. Screw (4φ x 6) x4	CAPACITORS		
0726	51570306B	P. H. Tapt Screw (3φ x 6) x2	C551	DF1610301	Film 0.01μF ±10% 50V
0728	51042606S	F. H. M. Screw (2.6φ x 6) x6	C552	DF1610301	Film 0.01μF ±10% 50V
1407	51570306B	P. H. Tapt Screw (3φ x 6)	C553	DF1610301	Film 0.01μF ±10% 50V
S006	SR1406001	Rotary Switch Selector	C554	DF1610301	Film 0.01μF ±10% 50V
R008	RT0510214	Resistor 1KΩ ±5% ¼W	C555	DD1620101	Ceramic 200PF ±10% 50V
R010	RT0510214	Resistor 1KΩ ±5% ¼W	C556	DD1620101	Ceramic 200PF ±10% 50V
R011	RT0510214	Resistor 1KΩ ±5% ¼W	C557	DD1620101	Ceramic 200PF ±10% 50V
S004	SR0802002	Rotary Switch Remocon	C558	DD1620101	Ceramic 200PF ±10% 50V
S005	SR1105001	Rotary Switch Mode	C559	DF1668201	Film 0.0068μF ±10% 50V
R009	RT0510214	Resistor 1KΩ ±5% ¼W	C560	DF1668201	Film 0.0068μF ±10% 50V

REF. DESIG.	MARANTZ PART NO.	DESCRIPTION	REF. DESIG.	MARANTZ PART NO.	DESCRIPTION
C561	DF1668201	Film 0.0068 μ F \pm 10% 50V	R763	RT0539314	39K Ω
C562	DF1668201	Film 0.0068 μ F \pm 10% 50V	R764	RT0539314	39K Ω
		MISCELLANEOUS	R765	RT0539314	39K Ω
J551	YP1000094	Plug	R766	RT0539314	39K Ω
J552	YP1000094	Plug	R767	RU0204001	Variable 200K Ω (B)
J553	YP1000094	Plug	R768	RU0204001	Variable 200K Ω (B)
J554	YP1000094	Plug	R769	GC1082418	820K Ω \pm 10% 1/8W
J555	YP1000094	Plug	R770	GC1082418	820K Ω \pm 10% 1/8W
J556	YP1000094	Plug			
J557	YP1000094	Plug	R771	GC1082418	820K Ω \pm 10% 1/8W
J558	YP1000094	Plug	R772	GC1082418	820K Ω \pm 10% 1/8W
J559	YP1000094	Plug			
J560	YP1000094	Plug			
J561	YP1000094	Plug			
S551	SP0404009	Push Switch			CAPACITORS
R012	RM0503050	Resistor Variable 50K Ω (B)	C751	DF1615301	Film 0.015 μ F \pm 10% 50V
S007	SP0201010	Push Switch Power	C752	DF1615301	Film 0.015 μ F \pm 10% 50V
G001	BF1040001	Printed Compo. 120 Ω + 0.1 μ F	C753	DF1615301	Film 0.015 μ F \pm 10% 50V
P900	YD2853002 ZZ2853122	P. W. B. Balance Control P. W. B. Ass'y	C754	DF1615301	Film 0.015 μ F \pm 10% 50V
		RESISTORS	C755	DF1615301	Film 0.015 μ F \pm 10% 50V
R901	RT0533214	3.3K Ω \pm 5% 1/4W	C756	DF1615301	Film 0.015 μ F \pm 10% 50V
R902	RT0533214	3.3K Ω \pm 5% 1/4W	C757	DF1615301	Film 0.015 μ F \pm 10% 50V
R903	RT0533214	3.3K Ω \pm 5% 1/4W	C758	DF1615301	Film 0.015 μ F \pm 10% 50V
R904	RT0533214	3.3K Ω \pm 5% 1/4W	C759	DD1520101	Ceramic 200PF \pm 5% 50V
R905	RX0203012	Variable 20K Ω (G)	C760	DD1520101	Ceramic 200PF \pm 5% 50V
R906	RX0203012	Variable 20K Ω (G)			
R907	RS0203004	Variable 20K Ω (G)	C761	DD1520101	Ceramic 200PF \pm 5% 50V
		MISCELLANEOUS	C762	DD1520101	Ceramic 200PF \pm 5% 50V
J901	YP1000099	Plug	S002	SP0404002	Push Switch Tape Mon
J902	YP1000099	Plug	0422	285627401	Reflector
J903	YP1000099	Plug	0426	285327101	Holder
J904	YP1000099	Plug	0722	51570305B	P. H. Tapt Screw (3 ϕ x 5) x2
J905	YP1000099	Plug	0724	51570305B	P. H. Tapt Screw (3 ϕ x 5) x2
J906	YP1000099	Plug	0720	51570306B	P. H. Tapt Screw (3 ϕ x 6) x2
J907	YP1000099	Plug	0424	281827101	Holder
J908	YP1000099	Plug	J031	YJ0800019	Jack Lamp Holder
J909	YP1000099	Plug	J032	YJ0800019	Jack Lamp Holder
J910	YP1000099	Plug	J033	YJ0800019	Jack Lamp Holder
R013	RG0204001	Resistor Variable 200K Ω (B)	J034	YJ0800019	Jack Lamp Holder
P750	YD2856003 ZZ2856003	P. W. B. Tone Control P. W. B. Ass'y	J035	YJ0800019	Jack Lamp Holder
		RESISTORS (All resistors are \pm5% and 1/4W, unless otherwise indicated.)	0716	51570305B	P. H. Tapt Screw (3 ϕ x 5) x5
R751	RT0527314	27K Ω	M001	IN1008007	Lamp
R752	RT0527314	27K Ω	M002	IN1008007	Lamp
R753	RT0527314	27K Ω	M003	IN1008007	Lamp
R754	RT0527314	27K Ω	M004	IN1008007	Lamp
R755	RT0527314	27K Ω	M005	IN1008007	Lamp
R756	RT0527314	27K Ω	R020	RC1002212	Resistor 2.2 Ω \pm 10% 1/4W
R757	RT0527314	27K Ω	R018	RC1018012	Resistor 18 Ω \pm 10% 1/4W
R758	RT0527314	27K Ω	P950	YD2856006 ZZ2856006	P. W. B. Lamp P. W. B. Ass'y
R759	RT0510414	100K Ω			MISCELLANEOUS
R760	RT0510414	100K Ω	M951	IN1006302	Lamp 6.3V 180mA
R761	RT0510414	100K Ω	M952	IN1012011	Lamp 12V 40mA
R762	RT0510414	100K Ω	M953	IN1006301	Lamp 6.3V 40mA
			M954	IN1006301	Lamp 6.3V 40mA
			M955	IN1006301	Lamp 6.3V 40mA
			M956	IN1006301	Lamp 6.3V 40mA
			M957	IN1006301	Lamp 6.3V 40mA
			M958	IN1006301	Lamp 6.3V 40mA

REF. DESIG.	MARANTZ PART NO.	DESCRIPTION	REF. DESIG.	MARANTZ PART NO.	DESCRIPTION
J951	YP1000094	Plug	B	281815440	Knob Ass'y x2
J952	YP1000094	Plug	0128	281815404	Knob x2
J953	YP1000094	Plug	0129	71400149Q	Spring x2
J954	YP1000094	Plug			
J955	YP1000094	Plug			
J956	YP1000094	Plug			
J957	YP1000094	Plug	C	281815441	Knob Ass'y x2
J958	YP1000094	Plug	0131	281815405	Knob x2
J959	YP1000094	Plug	0132	71400159Q	Spring x2
J960	YP1000094	Plug			
J961	YP1000094	Plug			
0414	281827103	Holder	A	285606340	Frame Ass'y
J036	YJ0800019	Jack Lamp Holder	0103	285606301	Escutcheon
J037	YJ0800019	Jack Lamp Holder	0104	285340101	Frame
0718	51570305B	P. H. Tapt Screw (3φ x 5) x2	0105	285615801	Window
M006	IN1008007	Lamp	0106	281825905	Bush x9
M007	IN1008007	Lamp	0107	273125901	Bush x2
			0108	285025901	Bush x3
			0109	285305301	Cover
0416	281826250	Pulley K			
0731	51100305A	P. H. M. Screw (3φ x 5)	E	285327340	Fly Wheel Ass'y
0413	281827402	Reflector	0603	257706302	Escutcheon x2
0730	51100305A	B. H. M. Screw x2	0604	257727301	Fly Wheel
J038	YL0103018	Terminal 3P	0605	285311201	Shaft
R006	RT0510314	Resistor 10KΩ ±5% ¼W	0610	53110603E	Hexagon Nut
J003	YL0103001	Terminal 3P Lug	0611	54040602N	Spring Washer
L006	LC1332002	Choke Coil 3μH	0612	54020601E	Flat Washer
C001	DK1710301	Capacitor Ceramic 0.01μF ±20%			
L007	LC1332002	Choke Coil 3μH	H	285616040	Rear Panel Ass'y
R007	RC1039012	Resistor 39KΩ ±10% ¼W	0803	285616001	Bracket
C003	DK1710301	Capacitor Ceramic 0.01μF ±20%	0809	281805501	Collar x2
J005	YL0104001	Terminal 4P Lug	0811	285116007	Bracket
1236	138200503	Clamper x10	0812	318827102	Holder
			0828	53228059E	Nut
D	281810340	Pointer Ass'y	0903	51100308S	B. H. M. Screw (3φ x 8) x20
M008	IN1008018	Lamp	0905	53110303E	Hexagon Nut (3φ) x20
0531	281810301	Pointer	0907	55060307F	T. R. Rivet x4
0532	281810302	Pointer	0909	54050300R	T. L. Washer OR x4
0533	281805301	Cover	0913	51100306S	B. H. M. Screw x6
			0915	53110403E	Hexagon Nut
			0916	62041760W	Lug
			0917	54020401E	Flat Washer P
			0918	54050400R	T. L. Washer OR
			0920	51100312S	B. H. M. Screw x2
F	120200640	String Ass'y	0921	53110303E	Hexagon Nut x2
0528	120225801	Hook	0922	51100306S	B. H. M. Screw (3φ x 6) x2
0529	72080802A	String x120	0934	51100306S	B. H. M. Screw (3φ x 6) x2
			0936	53110303E	Hexagon Nut (3φ) x2
1214	285526703	Heat Sink	J001	YT0304003	Terminal FM-AM Ant
H803	HT403314A	Transistor 2SD331C, D, E, F	J002	YT0201006	Terminal Quadradial
H805	HT403311D	Transistor 2SD331 (D)	J007	YT0204003	Terminal Phono Tape In
			J008	YT0208002	Terminal 8P
			J009	YT0208002	Terminal Front In 8P
			J010	YT0204003	Terminal Tape Out
			J011	YT0204003	Terminal Tape Out
			J012	YT0304003	Terminal Spk. 4P
			J013	YT0304003	Terminal Spk. 4P
			J014	YT0304003	Terminal Spk. 4P
			J015	YT0304003	Terminal Spk. 4P
G	281915940	Drum Ass'y	J016	YL0301021	Terminal Ground
1015	281915901	Drum	J019	YJ0400018	Jack AC Outlet
1016	71101569M	Spring	J020	YJ0400018	Jack AC Outlet
1030	51650304D	Set Screw x2	J029	YJ1100012	Jack Din

REF. DESIG.	MARANTZ PART NO.	DESCRIPTION	REF. DESIG.	MARANTZ PART NO.	DESCRIPTION
S001	SS0202017	Slide Switch FM Att.	1212	285610901	Shield
			1216	285610902	Shield
0814	145525903	Bush	1218	285610102	Support x4
0818	145525903	Bush	1226	281816009	Bracket x2
0820	257816052	Bracket K	1230	138200503	Clamper
0826	281927103	Holder	1232	273025901	Bush x2
			1234	285310102	Support x2
			1235	54040402N	Spring Washer x2
R004	RK0254002	Resistor Variable 250K Ω (B)	0134	275905701	Leg x4
1405	62031650W	Lug	0313	51100410A	B. H. M. Screw x4
C004	DK1710301	Capacitor Ceramic 0.01 μ F \pm 20%	0314	54020401A	Flat Washer P x4
C005	DK1710301	Capacitor Ceramic 0.01 μ F \pm 20%	0315	54040402A	Spring Washer x4
1405	62031650W	Lug	1303	51570306B	P. H. Tapt Screw x8
R019	RC1022512	Resistor 2.2M Ω \pm 10% $\frac{1}{2}$ W	1304	51570306B	P. H. Tapt Screw x8
			1305	51570306B	P. H. Tapt Screw x10
1405	62031650W	Lug	1306	51570305B	P. H. Tapt Screw x4
R001	RC1068012	Resistor 68 Ω \pm 10% $\frac{1}{2}$ W	1307	51570306B	P. H. Tapt Screw x4
R002	RC1008212	Resistor 8.2 Ω \pm 10% $\frac{1}{2}$ W	1308	51570306B	P. H. Tapt Screw x2
R003	RC1068012	Resistor 68 Ω \pm 10% $\frac{1}{2}$ W	1309	51570306B	P. H. Tapt Screw x3
L002	LB3007526	Balun Coil FM 75 Ω - 300 Ω	1311	51100306S	B. H. M. Screw x4
0924	51100310S	B. H. M. Screw x2	1312	51100306S	B. H. M. Screw x4
0925	53110303E	Hexagon Nut x2	1313	51100306S	B. H. M. Screw x4
0927	51100308S	B. H. M. Screw x2	1314	51100306S	B. H. M. Screw x4
0928	53110303E	Hexagon Nut x2	1315	51100306S	B. H. M. Screw x4
0929	54050300R	T. L. Washer OR x2	1316	51100306S	B. H. M. Screw x4
0931	51100306S	B. H. M. Screw x3	1317	51100306S	B. H. M. Screw x4
0932	54040302N	Spring Washer x3	1318	51100306E	B. H. M. Screw
1405	62031650W	Lug	1323	51100304S	B. H. M. Screw x2
W001	YC0240010	AC Cord	1325	51100512A	B. H. M. Screw x4
J030	YJ0800012	Jack Fuse Holder	1326	53110501A	Hexagon Nut x4
L001	LF1120023	AM Ant Coil	1327	54020501A	Flat Washer P x8
W002	YW2856001	Wire Material	1328	54040502A	Spring Washer x4
W003	YX2856001	Wire Material	1331	51060306E	P. H. M. Screw x4
1403	54050300R	T. L. Washer OR x10	1003	273010950	Shield K
1405	62031650W	Lug x5	1007	273010902	Shield
1407	51570306B	P. H. Tapt Screw x4	1009	273010903	Shield x3
1009	51570306B	P. H. Tapt Screw x15	1011	281916008	Bracket x2
1426	285110101	Support x2	1013	281905102	Guide
1427	53110303E	Hexagon Nut x2	1018	138200503	Clamper
1428	54040302N	Spring Washer x2	1026	51100306S	B. H. M. Screw x5
1429	51100306S	B. H. M. Screw x2	1027	51100305E	B. H. M. Screw x3
1431	281805601	Buffer	1028	51100305E	B. H. M. Screw x2
0905	51100308S	B. H. M. Screw x2	1029	51100305A	B. H. M. Screw x4
0903	53110303E	Hexagon Nut x2	0202	285626501	Indicator
L003	TS6140301	Transformer	0911	51100306S	B. H. M. Screw x2
C006	EC9080501	Capacitor Electroly 9000 μ F 50V	0211	257886101	Label
C007	EC9080501	Capacitor Electroly 9000 μ F 50V	0212	257886102	Label
C008	EC9080501	Capacitor Electroly 9000 μ F 50V	0213	257886103	Label
C009	EC9080501	Capacitor Electroly 9000 μ F 50V	0214	250626506	Indicator
J004	YL0103001	Terminal 3P Lug	0222	285386101	Label
C101	CA4330001	Capacitor Variable	0112	285325701	Lid
1203	285610550	Chassis K	0113	257711803	Spacer x4
			I	285325740	Bottom Cover Ass'y
			0115	285325750	Lid K
			9336	285612001	Insulator
			0120	285015401	Knob x3
			0122	281815401	Knob x8

REF. DESIG.	MARANTZ PART NO.	DESCRIPTION	REF. DESIG.	MARANTZ PART NO.	DESCRIPTION
0124	281815402	Knob	0620	51640410D	Set Screw C. P.
0126	281815403	Knob x5	0621	54040402N	Spring Washer
0535	286726901	Protector	0622	53110403E	Hexagon Nut
0508	285326901	Protector	0624	51100306A	B. H. M. Screw x2
0510	285326902	Protector	0625	54050300R	T. L. Washer OR x2
0523	281912002	Insulator	1502	285685101	Instructions
0515	285630201	Dial	1509	285685601	Schematic Diagram
0710	51570306B	P. H. Tapt Screw (3φ x 6) x2	1517	281885104	Instructions
0712	51570306B	P. H. Tapt Screw (3φ x 6) x2	1518	281885108	Instructions
0733	51570306B	P. H. Tapt Screw (3φ x 6) x2	1523	257785450	Guarantee Card K
0522	285312001	Insulator	1602	285680101	Packing Case
0303	51122608E	T. H. M. Screw x4	1603	285680111	Packing Case
0305	51100406S	B. H. M. Screw x9	1608	285380301	Partitioner
0309	51100406S	B. H. M. Screw x4	1609	285380302	Partitioner
0310	54020401S	Flat Washer P x4	1612	901483838	Polyethylen Bag
1622	952281501	Serial No Card x4	1614	901302501	Polyethylen Bag x2
F001	FS1050003	Fuse 5A (UL) 3AG	1617	102980401	Sleeve
0606	285011202	Shaft	1619	273182101	Silicagel x2
0607	54040402N	Spring Washer	1620	281905601	Buffer
0616	285310650	Bearing K	0118	285125703	Lid
			0135	512160595	Screw x4
			1631	ZA0200007	Ext. Antenna

TECHNICAL SPECIFICATIONS

FM SECTION:

Tuning Frequency Range	88 – 108MHz
IHF usable Sensitivity	2.3μV
IHF Selectivity	60dB
Capture Ratio	1.6dB
Image Rejection Ratio at 106MHz	70dB
Signal to Noise Ratio (Mono)	70dB
Signal to Noise Ratio (Stereo)	60dB
Total Harmonic Distortion (Mono)	0.15%
Total Harmonic Distortion (Stereo)	0.3%
Frequency Response (ref. 75μ sec. de-emphasis)	50Hz – 15KHz ± 1dB
Stereo Separation at 1KHz	42dB
Quadrantal Output (400Hz 75KHz dev.)	300mV

AM SECTION:

Tuning Frequency Range	540 – 1605KHz
Usable Sensitivity	20μV
Selectivity	26dB
Image Rejection Ratio at 1400KHz	70dB
Signal to Noise Ratio	43dB
Frequency Response (–3dB)	50Hz – 4KHz
Total Harmonic Distortion	1%

AUDIO SECTION:

Input Impedance — Low level input	Phono 47 Kohm
— High level input	100 Kohm
Input Sensitivity — Phono	1.8mV for 30W output
— High level	180mV for 30W output
Frequency Response	1.0dB, 20Hz to 20KHz at 1W output
Intermodulation Distortion	Less than 0.3% at rated power output from 20Hz to 20KHz with all channels driven (S.M.P.T.E.)
Total Harmonic Distortion	Less than 0.3% at rated power output 20Hz to 20KHz with all channel driven
Damping Factor	Greater than 45 into 8 ohms load
Total Noise — From magnetic phono input to power amp output	Less than 2 μ V equivalent input at rated output into 8 ohms load
Volume Tracking	Within 4dB
Rated Continuous (RMS) Output per channel, all channels operating simultaneously	30W at 4 ohms 30W at 8 ohms 18W at 16 ohms
Comparable Total Music Power	180W at 8 ohms

GENERAL:

Power Requirements	120V AC 50 to 60Hz
Power Consumption — at rated power output, all channels	420 watts
— idling (no signal)	30 watts
Dimensions — Panel Width	17 21/64 inches
— Panel Height	5 25/64 inches
— Depth	14 3/8 inches
Weight — Unit alone	38.5 lbs
— Packed for Shipment	49.5 lbs

* These specifications and exterior designs may be changed for improvement without advance notice.



marantz

MARANTZ CO., INC. • P.O. BOX 99 • SUN VALLEY, CALIFORNIA • 91352



A WHOLLY-OWNED SUBSIDIARY OF SUPERSCOPE INC., SUN VALLEY, CALIFORNIA 91352