


DC-Motor commutating circuit IN: 24 VDC - OUT: 24 VDC / 3 A

Transistor 3 A
24 V DC
Screw terminals

Image

- Start-stop/left-right (active stop mode)
- Over current / temperature monitoring

Vicarious picture

Input

Voltage range ON	15...30 V DC
Voltage range OFF	0...5 V DC
Operating current	10 mA
LED display	LED (yellow): right running; LED (green): left running

Output

Switching voltage	19.2...30 V DC
Leakage current (when output is open)	max. 10 mA
Switching current	3 A
Highest current	approx. 6 A for 100 ms
Saturation voltage (across output)	max. 1.4 V DC
Switching time ON/OFF	1.2/10 ms
Switching frequency	max. 1 Hz (motor dependant)
Changing time	max. 50 ms
LED display	LED (red): error (over current / over heated)


General data

Test isolation voltage	no galvanic separation
Temperature range	0...+50 °C
Housing	Plastic black, flame retardant
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Dimensions H × W × D	75 x 22.5 x 102 mm


Commercial data

Net weight	60
Weight unit	gram
Basic unit	pc.
Customs tariff number	85414090
Unit (piece)	1
Limited value	1

Circuit diagram

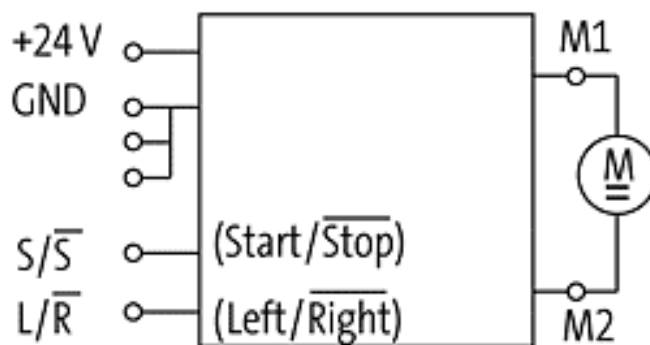

Dimension drawing

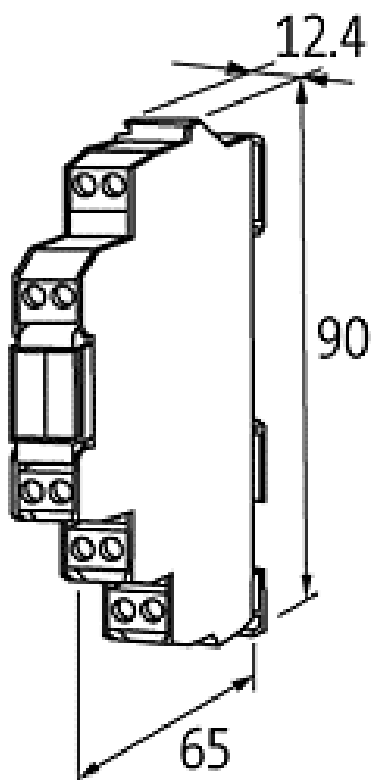

De-rating curve

