

DC-MOTOR COMMUTATING CIRCUIT


IN: 24 VDC - OUT: 24 VDC / 3 A

Transistor 3 A  
24 V DC  
Screw terminals

Start-stop/left-right (active stop mode) Over current / temperature monitoring

Link to Product

Illustration

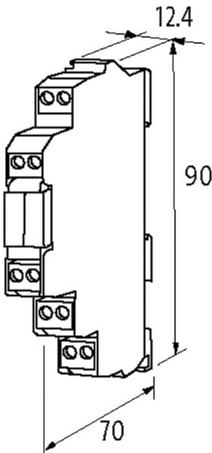

Product may differ from Image

Input	
Voltage range ON	15...30 V DC
Voltage range OFF	0...5 V DC
Input current	10 mA
LED display	LED (yellow): right running; LED (green): left running
Output	
Switching voltage	19.2...30 V DC
Switching current per output	max. 3 A
Highest current	approx. 6 A for 100 ms
Saturation voltage (across output)	max. 1.4 V DC

Leakage current (output is open)	max. 10 mA
Switching time ON/OFF	1.2/10 ms
Switching frequency	max. 1 Hz (motor dependant)
Changing time	max. 50 ms
LED display	LED (red): error (over current/over heated)

**General data**

Dimensions H×W×D	90×12.4×70 mm
Test isolation voltage	no galvanic separation
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	0...+50 °C

**Commercial data**

country of origin	CZ
customs tariff number	85414090
EAN	4048879027922
eClass	27371604
Packaging unit	1