


QX-949A F

DEAD SET - CHECK
Q1 + Q4

4-CHANNEL STEREO RECEIVER
QX-949A

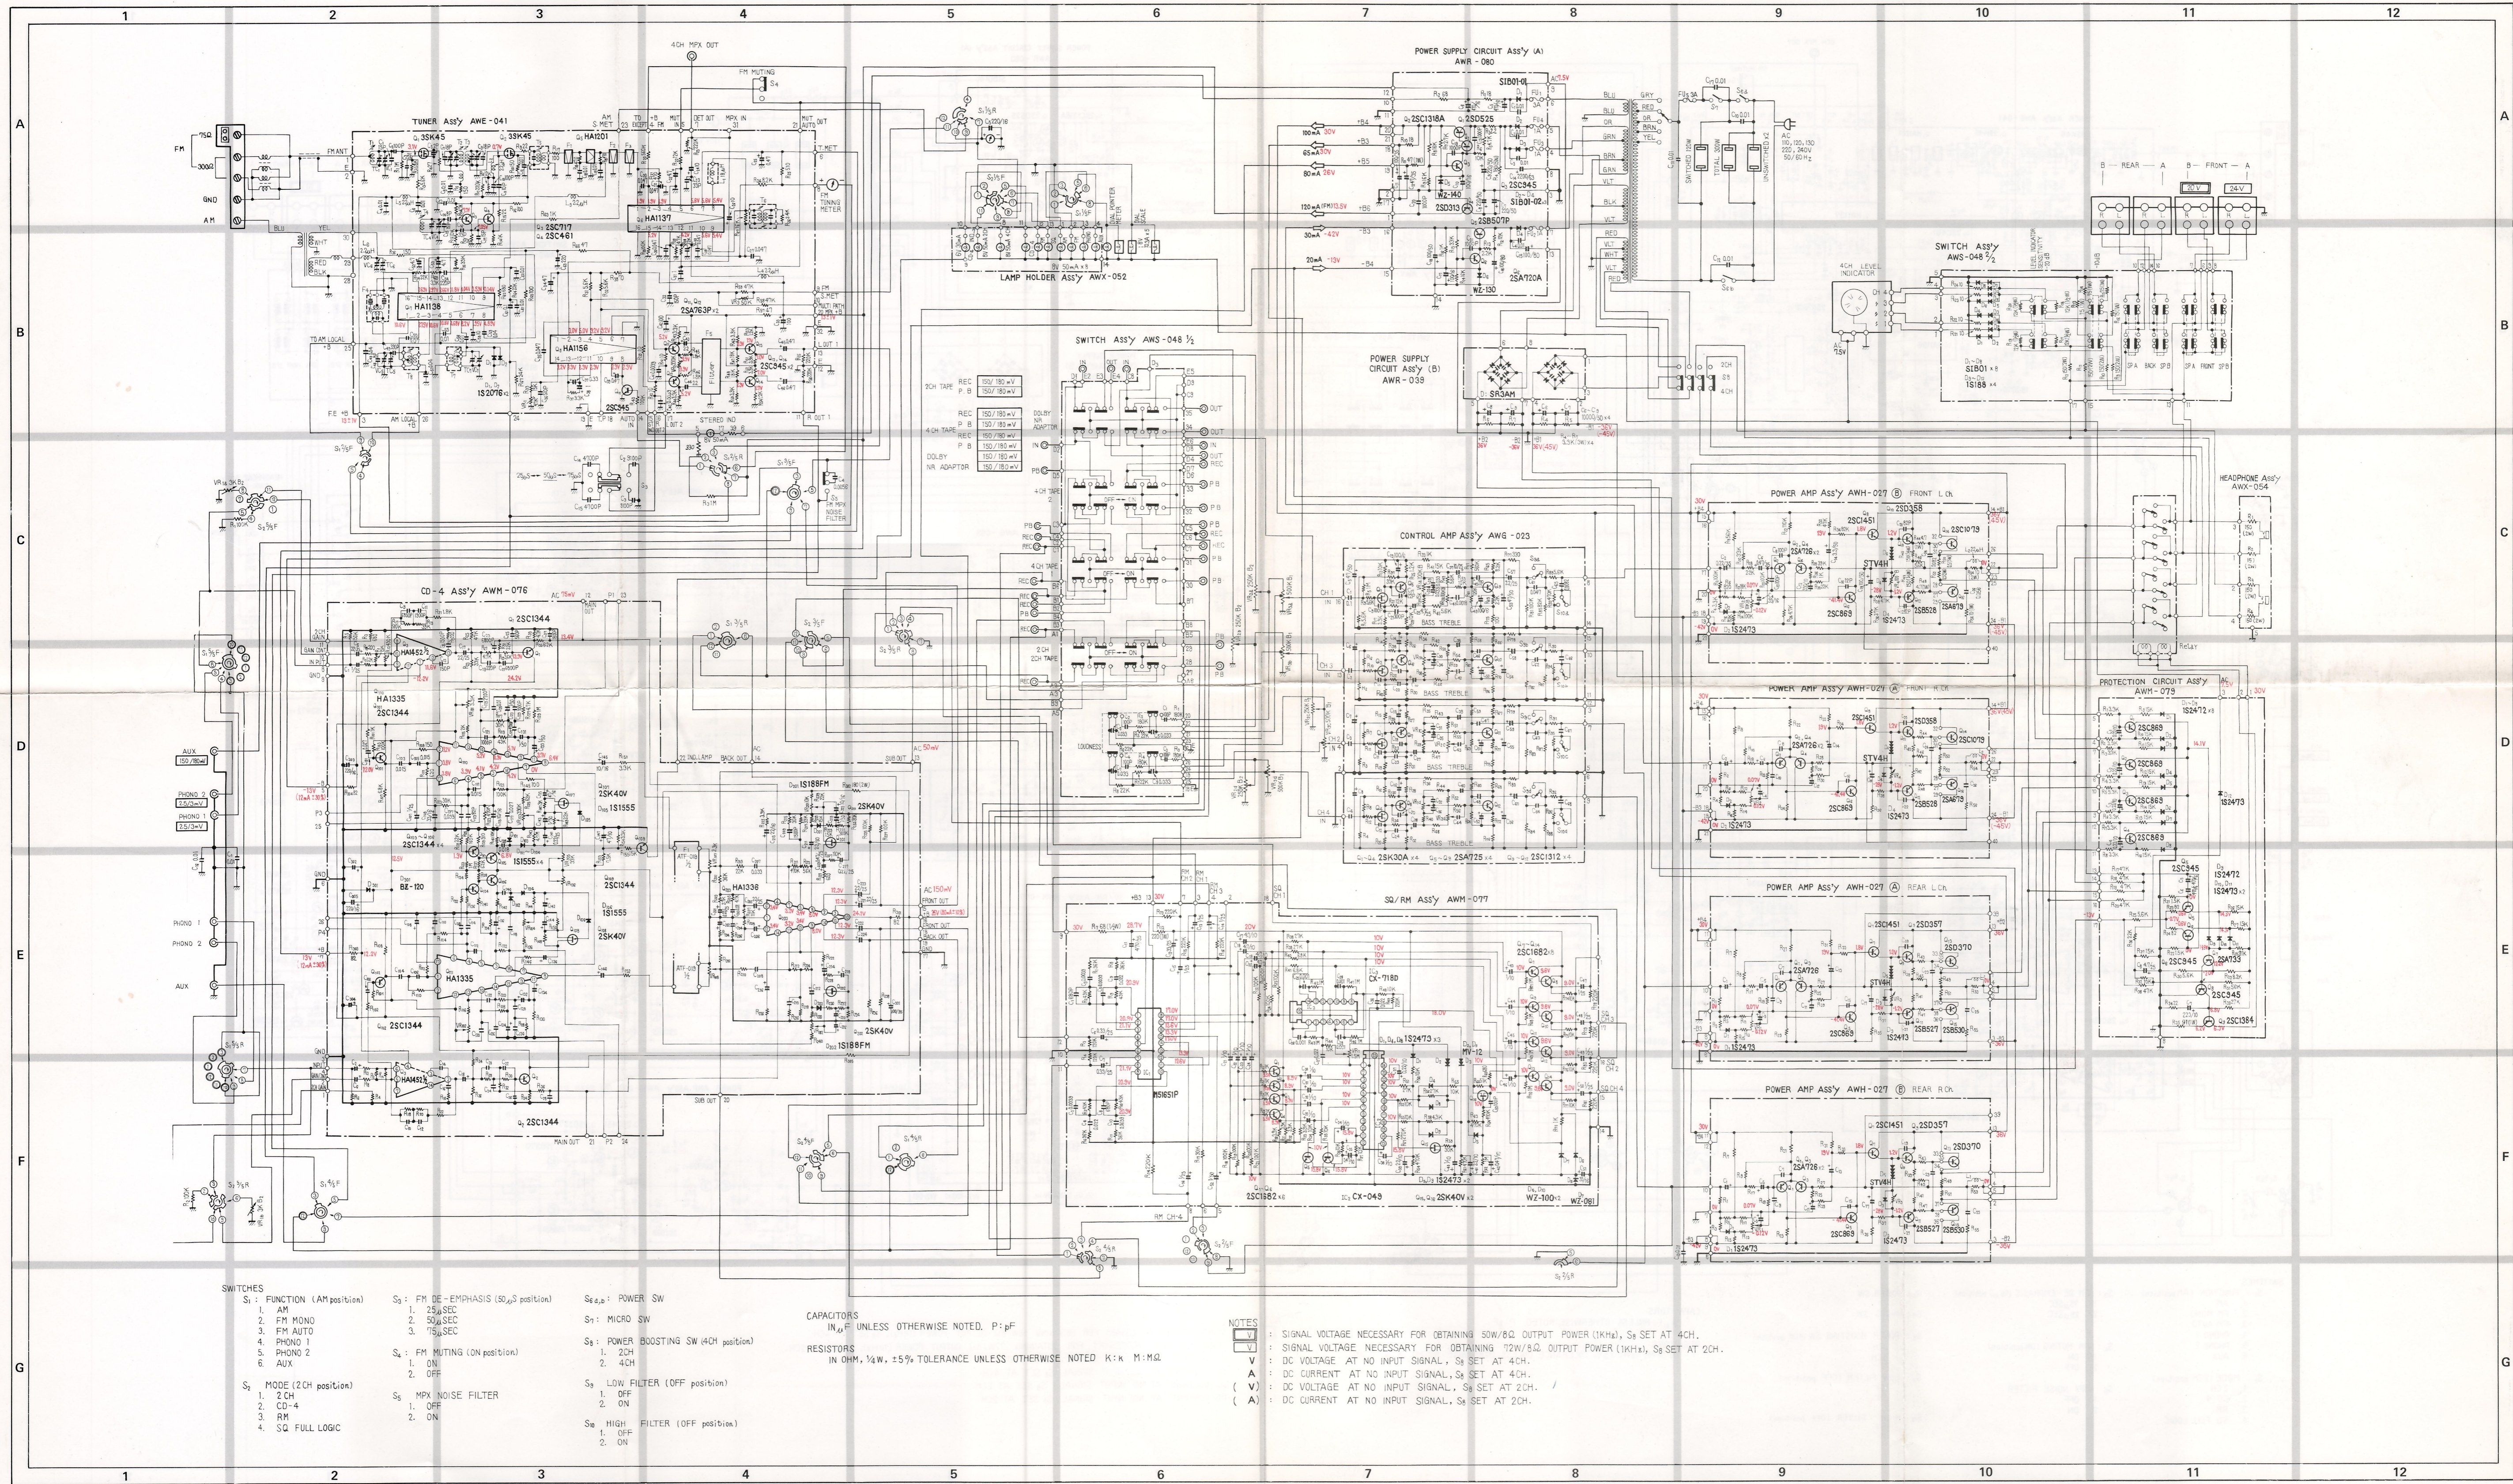

- SWITCHES**
- S₁: FUNCTION (AM position)
 1. AM
 2. FM MONO
 3. FM AUTO
 4. PHONO 1
 5. PHONO 2
 6. AUX
 - S₂: MODE (2CH position)
 1. 2CH
 2. CD-4
 3. RM
 4. SQ FULL LOGIC
 - S₃: FM DE-EMPHASIS (50μS position)
 1. 25μSEC
 2. 50μSEC
 3. 75μSEC
 - S₄: FM MUTING (ON position)
 1. ON
 2. OFF
 - S₅: MPX NOISE FILTER
 1. OFF
 2. ON
 - S_{6, 7}: POWER SW
 - S₈: MICRO SW
 - S₉: POWER BOOSTING SW (4CH position)
 1. 2CH
 2. 4CH
 - S₁₀: LOW FILTER (OFF position)
 1. OFF
 2. ON
 - S₁₁: HIGH FILTER (OFF position)
 1. OFF
 2. ON

- CAPACITORS**
IN μF UNLESS OTHERWISE NOTED. P: P.F
- RESISTORS**
IN OHM, 1/4W, ±5% TOLERANCE UNLESS OTHERWISE NOTED. K: k M: MΩ

- NOTES**
- (V): SIGNAL VOLTAGE NECESSARY FOR OBTAINING 50W/8Ω OUTPUT POWER (1KHz), S₈ SET AT 4CH.
 - (V): SIGNAL VOLTAGE NECESSARY FOR OBTAINING 12W/8Ω OUTPUT POWER (1KHz), S₈ SET AT 2CH.
 - (V): DC VOLTAGE AT NO INPUT SIGNAL, S₈ SET AT 4CH.
 - (A): DC CURRENT AT NO INPUT SIGNAL, S₈ SET AT 2CH.
 - (V): DC VOLTAGE AT NO INPUT SIGNAL, S₈ SET AT 4CH.
 - (A): DC CURRENT AT NO INPUT SIGNAL, S₈ SET AT 2CH.