



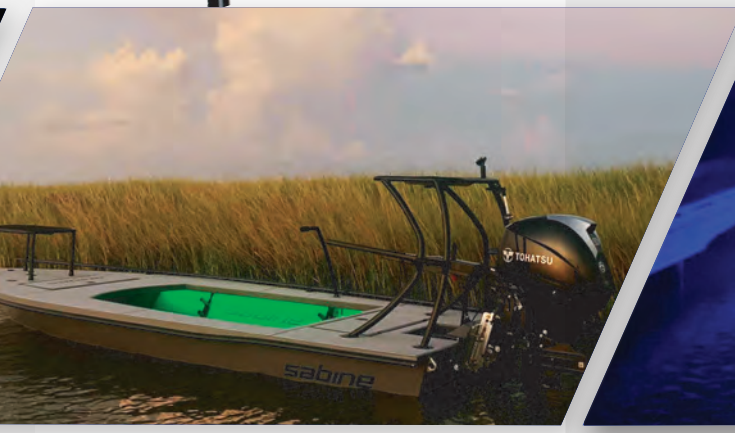


**FEATURES**

- IP68 Waterproof with Molded Power Wire
- 9Ft. Black Insulated Power Wire
- Input: 12VDC or 24VDC
- Extremely Durable
- Cutable in Segments
- UL Rated (Rating is Lost if Cut or Modified) and ROHS
- 50,000 Hours Expected Lifetime
- Bodaciously Bright, with Wide Viewing Angle
- Available in 1ft, 2ft, 4ft, 6ft, 8ft, 10ft, 12ft, 14ft, 16ft, 20ft, 24ft, 26ft, and 30ft sections
- Included in Each Package: Rubber Tie Downs, 2 Caps for Dead Ends, Plus 2 Caps for The Live Ends

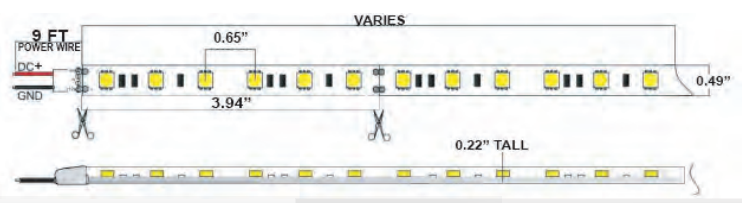

**SPECIFICATIONS**

Part #	LED Color	Volts	Amps/ft	Length (ft)	Luminous Flux*	λ/TCC	Power/16ft
FLS-RED-68	RED	12V	0.275A	Up to 16'	640-680NM	60PCS	72W
FLS-RGB-68	RGB	12V or 24V	0.275A	Up to 32'	2,900-3,300K	60PCS	72W
FLS-GR-68	GREEN	12V	0.275A	Up to 16'	520-525NM	60PCS	72W
FLS-BL-68	BLUE	12V	0.275A	Up to 16'	460-465NM	60PCS	72W
FLS-BL/CW-68	BLUE + COOL WHITE	12V	0.275A	Up to 26'	460-465NM/ 4,750-5,500K	30PCS	72W
FLS-CW-68	COOL WHITE	12V or 24V	0.275A	Up to 32'	5,800-6300K	60PCS	72W
FLS-NW-68	NATURAL WHITE	12V or 24V	0.275A	Up to 32'	4,500-5000K	60PCS	72W
FLS-RGBW-68	RGBW	12V or 24V	0.275A	Up to 32'	2,900-3,300K/ 4,750-5,500K	30PCS	72W

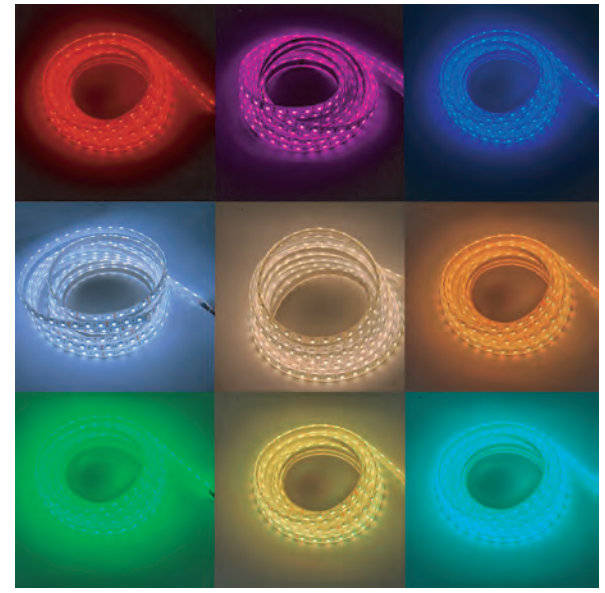

\* Based on LED manufacturer specifications