


7-POLE SOCKETS

- Meets and exceeds all standards of **SAE J560** (SAE applies only to solid pins)
- Floating pins for ease of alignment and maximum contact.
- Optimum slant mount and drain slot rid housing interior of accumulated moisture.
- Will accept the widest range of gauges from #16 wires to #8 ground wire. Ground Terminal Pin #1 will accept #14 gauge min. to #8 gauge max. Other terminals will accept #16 gauge min. to #10 gauge max.
- 40 Amps continuous duty @ 6-28 VDC.
- Self grounded. (Zinc Die-Cast Units Only) to #1 Ground Terminal.
- Stainless steel spring.
- Recommended Mounting Hole is 2" diameter
- Interchangeable with competitive makes.

No.	Color	Wire Gauge	FMVSS-121 Anti-Lock Gauge	Circuit
1	White	10	8	Ground Return
2	Black	12	12	Clearance, Side Marker and Identification Lamps
3	Yellow	12	12	Left Turn & Hazard Signal
4	Red	12	10	Stop Lamps & Anti-Lock Devices
5	Green	12	12	Right Turn Signal & Hazard Signal
6	Brown	12	12	Tail, Rear Clearance Marker, License Plate Lamp
7	Blue	12	12	Auxiliary Circuit / ABS Power

WIRE INSERTION STYLE SOCKETS

DRAIN SLOT IN COVER

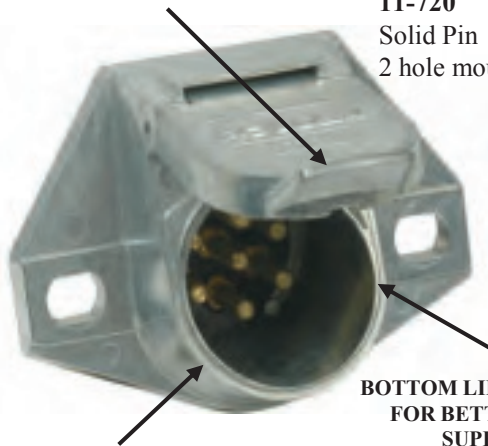

BUILT-IN OPTIMUM SLANT FOR DRAINAGE

BOTTOM LIP EXTENDED FOR BETTER PLUG SUPPORT

ZINC DIE-CAST

11-720
Solid Pin
2 hole mount

11-721
Split Pin
2 hole mount



11-729
Solid Pin
3 hole mount

11-730
Split Pin
3 hole mount

POLLA/GLASS
GLASS FILLED
NYLON

11-724
Nylon socket
Split Pin

11-723
Nylon socket
Solid Pin



ACCESSORIES

11-761

7 Pole Socket Rubber Socket Boot for 11-720, 11-721, 11-723, 11-724, 11-729, 11-730 and 11-852; seals against dust and moisture, 1.5" long. For .460-.720 diameter cable.



11-780

Neoprene rubber gasket for 3 hole mount die-cast sockets. May be used as template

11-773
Same as 11-780 except for 2 hole mount sockets.



11-771

7-Pole Socket bracket. Fits all 7-Pole Sockets including 11-851.



11-777

Hardware Kit for 7-Pole Plugs (except RV)



11-781

Hardware Kit for 7-Pole Zinc Die-Cast Socket

11-779

Hardware Kit for 7-Pole Molded Polla/Glass Sockets