

Rebel

FLO
IQ
INSIDE



The PowerRV Rebel—
Delivering a new
level of pumping
performance.

Typical Applications * Water Treatment/RO * General Industrial * Alternative Energy/Solar



Made in the USA



Motor Options



Sealed motor



Professional grade





Heavier wire for low
amp draw

REBEL STANDARD PUMP CONFIGURATIONS

Item Number	GPM	Controls	PSI	Valves	Diaphragm	Ports	Voltage
JRV PUMPS							
53REBEL-JRV	3.0 GPM	Dual	60	EPDM	SANTOPRENE	3/4" QUICK ATTACH	12 VDC
54REBEL-JRV	4.0 GPM	Dual	60	EPDM	SANTOPRENE	3/4" QUICK ATTACH	12 VDC
55REBEL-JRV	5.3 GPM	Dual	60	EPDM	SANTOPRENE	3/4" QUICK ATTACH	12 VDC
55REBEL-65C	5.3 GPM	Dual	60	EPDM	SANTOPRENE	3/4" QUICK ATTACH	120 VAC
ORV PUMPS - No fuse							
53REBEL-ORV	3.0 GPM	Dual	60	EPDM	SANTOPRENE	3/4" QUICK ATTACH	12 VDC
54REBEL-ORV	4.0 GPM	Dual	60	EPDM	SANTOPRENE	3/4" QUICK ATTACH	12 VDC
55REBEL-ORV	5.3 GPM	Dual	60	EPDM	SANTOPRENE	3/4" QUICK ATTACH	12 VDC

• Retail Packaging • Other Voltages Available

12V PUMP DIMENSIONS

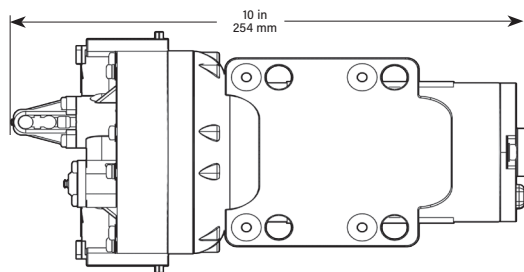

PUMP INFORMATION

Flow Rate

53REBEL - 3.0 GPM / 12 LPM
54REBEL - 4.0 GPM / 15 LPM
55REBEL - 5.3 GPM / 20 LPM

Amps

15 Max

Max Pressure

60 PSI Shutoff

Inlet/Outlet Ports

3/4" NPT or Quick Attach

Weight

All models: 8 lbs (3.62 kg)

Voltage

12VDC or 120VAC

MOTOR INFORMATION

- No cycling
- Outlet check valve prevents back flow
- High Performance 60PSI, 15 Amps Max
- Self Priming - 14 Ft.
- Run dry capability

PERFORMANCE REBEL SERIES

	53REBEL			54REBEL			55REBEL		
PSI	GPM	LPM	AMPS	GPM	LPM	AMPS	GPM	LPM	AMPS
OPEN	3.10	11.75	4.00	4.55	17.24	7.50	5.30	20.09	8.00
10	2.80	10.61	5.00	4.10	15.54	8.50	5.11	19.37	9.50
20	2.30	8.72	6.00	3.75	14.21	9.50	4.75	18.00	11.00
30	2.10	7.96	7.00	3.40	12.89	11.00	4.30	16.30	13.00
40	1.90	7.20	8.00	3.05	11.56	12.00	3.85	14.59	14.00
50	1.65	6.25	8.50	2.75	10.42	13.00	3.40	12.89	15.00
60	1.45	5.50	9.50	2.45	9.29	13.50	3.00	11.37	15.00