


S.M.S.L

D100

使用说明书

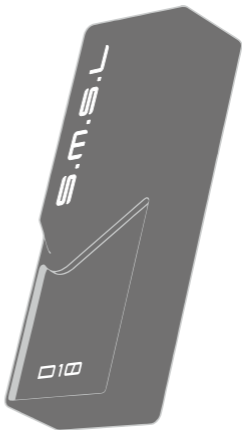

<http://smsl-audio.com/>

本说明书的内容可能会随版本更改,如有变动,恕不另行通知

Ver 1.1

技术参数

- 请将设备安装在通风良好、阴凉、干燥、干净的位置，远离直射阳光热源、振动、灰尘、潮湿或寒冷。
- 只能使用本机指定的电压。使用高于指定数值的电压很危险，而且可能导致火灾，损坏本机或造成人身伤害。对于使用高于指定电压造成的任何损害，我司将不负任何责任。
- 不要试图自行改造或修理本机。如果需要任何服务，请与销售或者我司客服人员联系。不管有任何理由，都没有打开机壳的必要。
- 如果打算长时间不使用本机（比如度假时），请从墙壁交流电源插座上断开电源线的连接。

重要提示：

本说明书所提到的产品规格和资讯仅供参考。如有内容更新，恕不另行通知。

保修条款

一、服务期限

佛山双木三林科技有限公司承诺产品的良好品质，产品自售出之后7天内正常使用情况下出现故障，客户可以选择退货或者保修（不影响二次销售才可退货）。正常使用一年内出现故障可以免费保修。

二、购买日期以销售商开出的购机发票或收据日期为准，网购可以交易截图为准。

三、有以下情况都不能享受“三包”服务


1. 一切人为因素损坏，包括非正常工作环境下使用或不按照说明书使用。
2. 用户私自拆机、改装、维修。
3. 使用非指定或许可的配件造成损坏的。
4. 机身的QC或保修贴损毁。
5. 不能出示有效购机凭证。
6. 不属于本公司产品。

四、保修方式为送修

此条款只适于中国大陆，其它地区请参考当地销售代理商的规定和国家法规。

产品介绍

- CIRRUS LOGIC DAC芯片2xCS43131。
- 支持DSD256硬件解码及PCM 32bit/384kHz。
- 4.4mm平衡耳机输出。

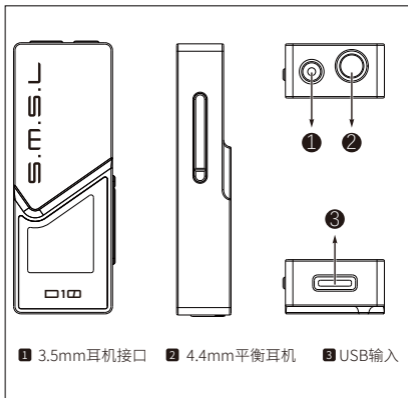

技术参数


输入方式	USB(异步)		
输出方式	3.5mm耳机, 4.4mm平衡耳机		
USB 兼容性	Windows 7 / 8 / 8.1 / 10 / 11(需要驱动) Mac OSX10.6+、Linux、Android、iOS		
最大输出电平	2 Vrms		
耳放输出功率	16Ω	500mW	
	32Ω	500mW	
	150Ω	160mW	
	300Ω	80mW	
	600Ω	40mW	
THD+N不计权	0.00015%(116dB)		
动态范围	121dB		
信噪比	121dB		
采样率	USB	PCM	44.1 ~ 384kHz
		DSD	2.8224 ~ 11.2896MHz
位深	USB	1bit,24 ~ 32bit	
电源	5V/200mA		
尺寸	55x11x20mm(WxHxD)		
重量	17.5g		

规格时有变更,恕不另行通知。

S.M.S.L

D10

USER MANUAL

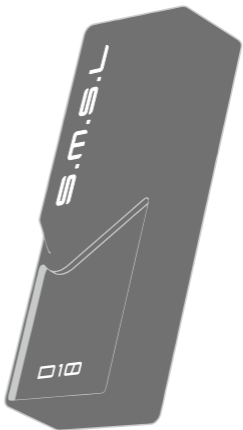

<http://smsl-audio.com/>

The contents of this manual may be changed with the edition, and are subject to change without notice!

Ver 1.1

Safety Notes

- Install this unit in a well ventilated, cool, dry, clean place-away from direct sunlight, heat sources, vibration, dust, moisture, or cold..
- Use the voltage specified on this unit Only. Using this unit with a higher voltage than specified is dangerous and may cause fire , damage to this unit, or personal injury. Our company will not be held responsible for any damage resulting from the use of this unit with a voltage other than that specified.
- Do not attempt to modify or fix this unit by yourself. Contact alesperson or customer service when any service is needed. The cabinet should never be opened for any reason.
- When not planning to use this unit for long periods of time (i.e. when going on vacation), disconnect the power cable from the AC wall outlet.

Important note:

The product specifications and information mentioned in this manual are for reference only. The content of this manual is subject to change without notice.

Warranty Terms

Warranty Terms

1.The term of service Foshan Shuangmusanlin Technology Co., Ltd. promises good quality products. If the product is defective by normal use within 7 days after purchasing, the customer can chose to send it back for returning or repairing (only the product does not affect the secondary sales can be returned). Faulty for free within one year warranty normal use.

2.Date of purchase is in accordance with the date on invoice or receipt used by seller, on line shopping can show the screenshot of trade.


3.Following situation can not enjoy“Three Guarantees service”

- a.All damages by human factors,including use it under non-normal working environment the and not follow manual in structions.
- b.User privately disassemble, modification, maintenance.
- c.Use non-designated or approved accessories cause damage.
- d.QC or warranty stickers damage on cabinet.
- e.Can not provide a valid purchasing prove.
- f. Not belong to SMSL product.

4.How to guarantee These terms only suitable for China mainland, other region pleaserefer to the policy of the local sales agents and nations.

Features

- CIRRUS LOGIC DAC chip 2xCS43131.
- Supports DSD256 hardware decoding and PCM 32bit/384kHz.
- 4.4mm balanced headphone output.

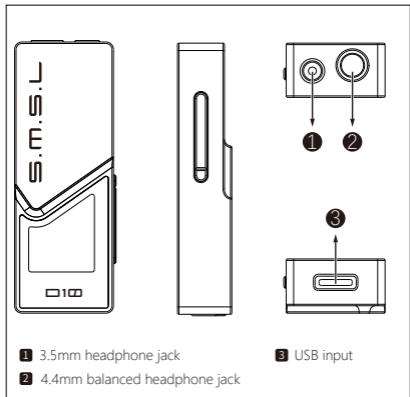

Specifications

Input	USB(Asynchronization)		
Output	3.5mm headphone jack		
	4.4mm balanced headphone jack		
USB compatibility	Windows 7 / 8 / 8.1 / 10 / 11(Needs Driver)		
	Mac OSX10.6+、Linux 、 Android、 iOS		
maximum output level	2 Vrms		
Headphone output power	16Ω	500mW	
	32Ω	500mW	
	150Ω	160mW	
	300Ω	80mW	
	600Ω	40mW	
THD+N(non-Weighting)	0.00015%(116dB)		
Dynamic range	121dB		
SNR	121dB		
Sampling Rate	USB	PCM	44.1 ~ 384kHz
		DSD	2.8224 ~ 11.2896MHz
Bit Depth	USB	1bit,24 ~ 32bit	
power	5V/200mA		
Size	55x11x20mm(WxHxD)		
Weight	17.5g		

SMSL reserves the right to make improvements which may result in specification or feature changes without notice.