

SERVICE MANUAL




SANYO

POWER AMPLIFIER

JA 340

(EUROPE)

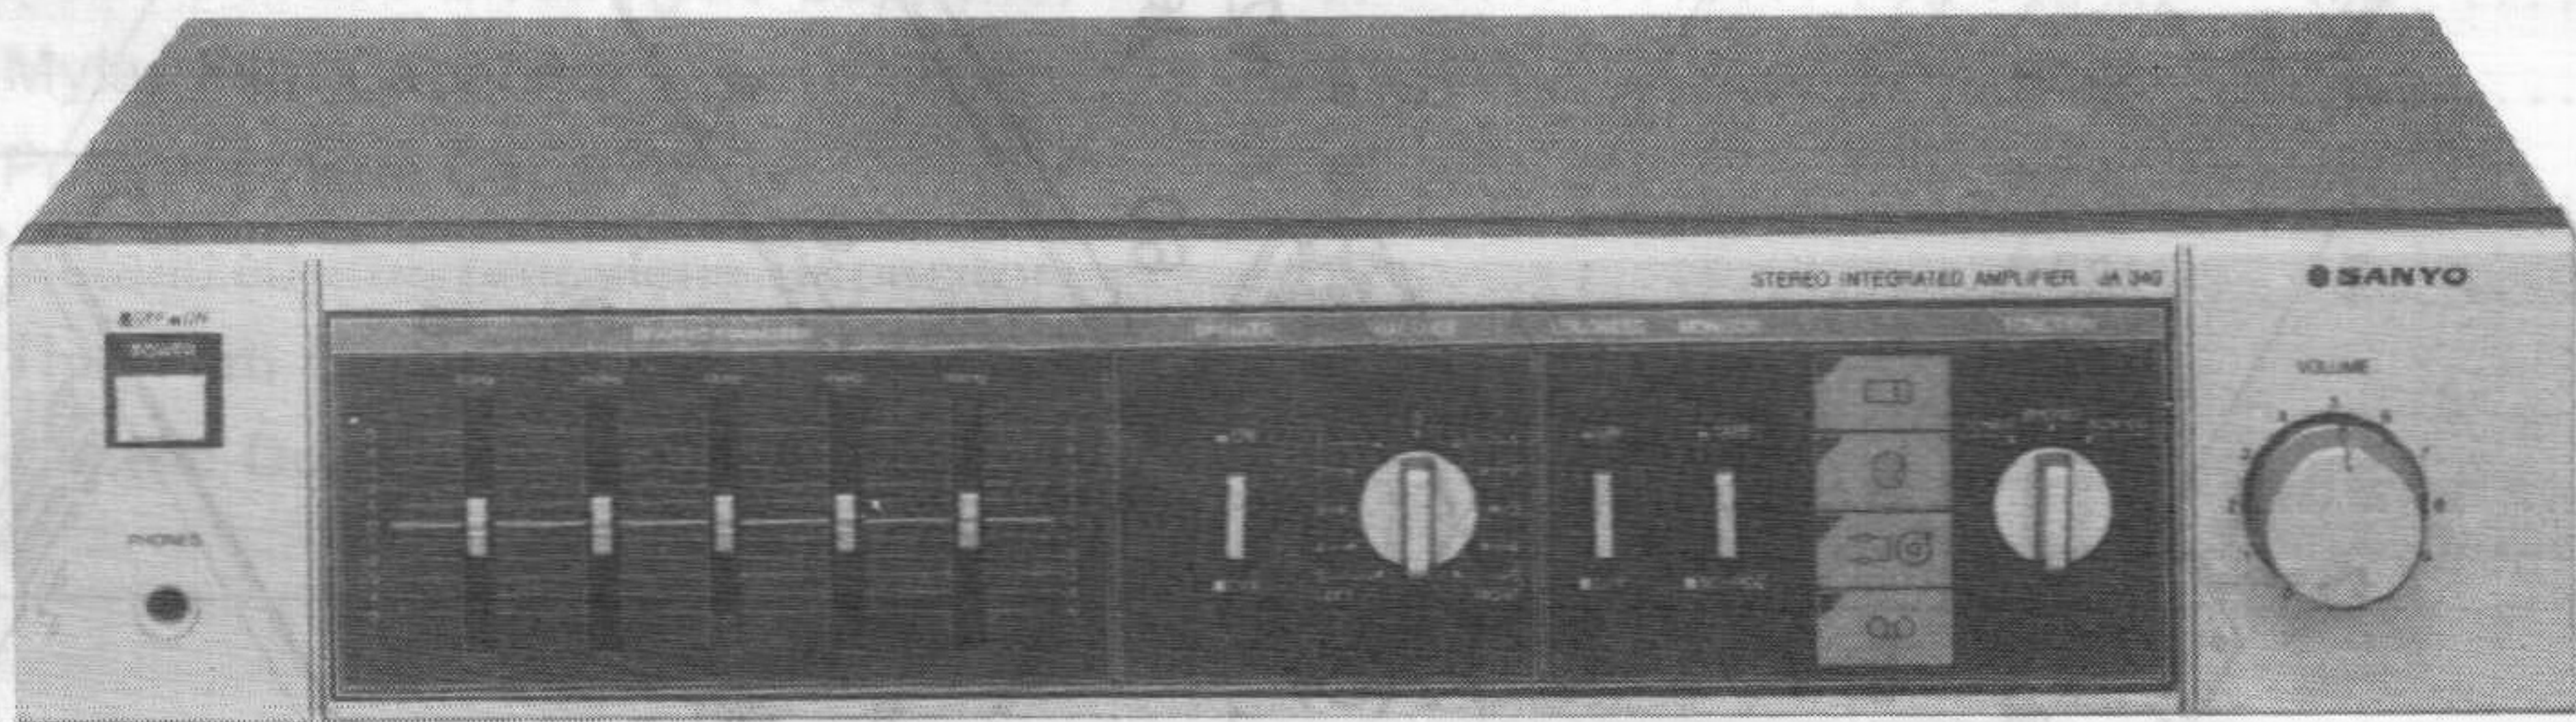


SPECIFICATIONS


NOTE:


The below mentioned specifications are mainly based on the IHF measurements standard. They can therefore not directly be compared with specifications based on the DIN standard or other standards.


Continuous output power	30 W x 2 (at 8 ohms, 0.3% distortion)
Input sensitivity and impedance	
PHONO	2.5 mV/47 kohms
AUX-CD/TUNER/TAPE PLAY	150 mV/47 kohms
Phono overload level	130 mV RMS (at 1 kHz)
Output level	
TAPE REC.	150 mV
Frequency response	20 – 20000 Hz (AUX-CD)
Graphic equalizer controls	±10 dB (63/250/1000/4000/16000 Hz)
Loudness control response	
100 Hz/10 kHz	+8 dB/+4 dB
Signal to noise ratio	95 dB (AUX-CD)
Power requirements	AC: 220 V, 50 Hz
Power consumption	180 W
AC output socket	AC: 18 V, 200 mA (max.)
Dimensions (Approx.)	420 (W) x 200 (D) x 80 (H) mm (16-1/2" x 7-7/8" x 3-1/8")
Weight (Approx.)	4 kg (9 lbs.)


* Specifications subject to change without notice.

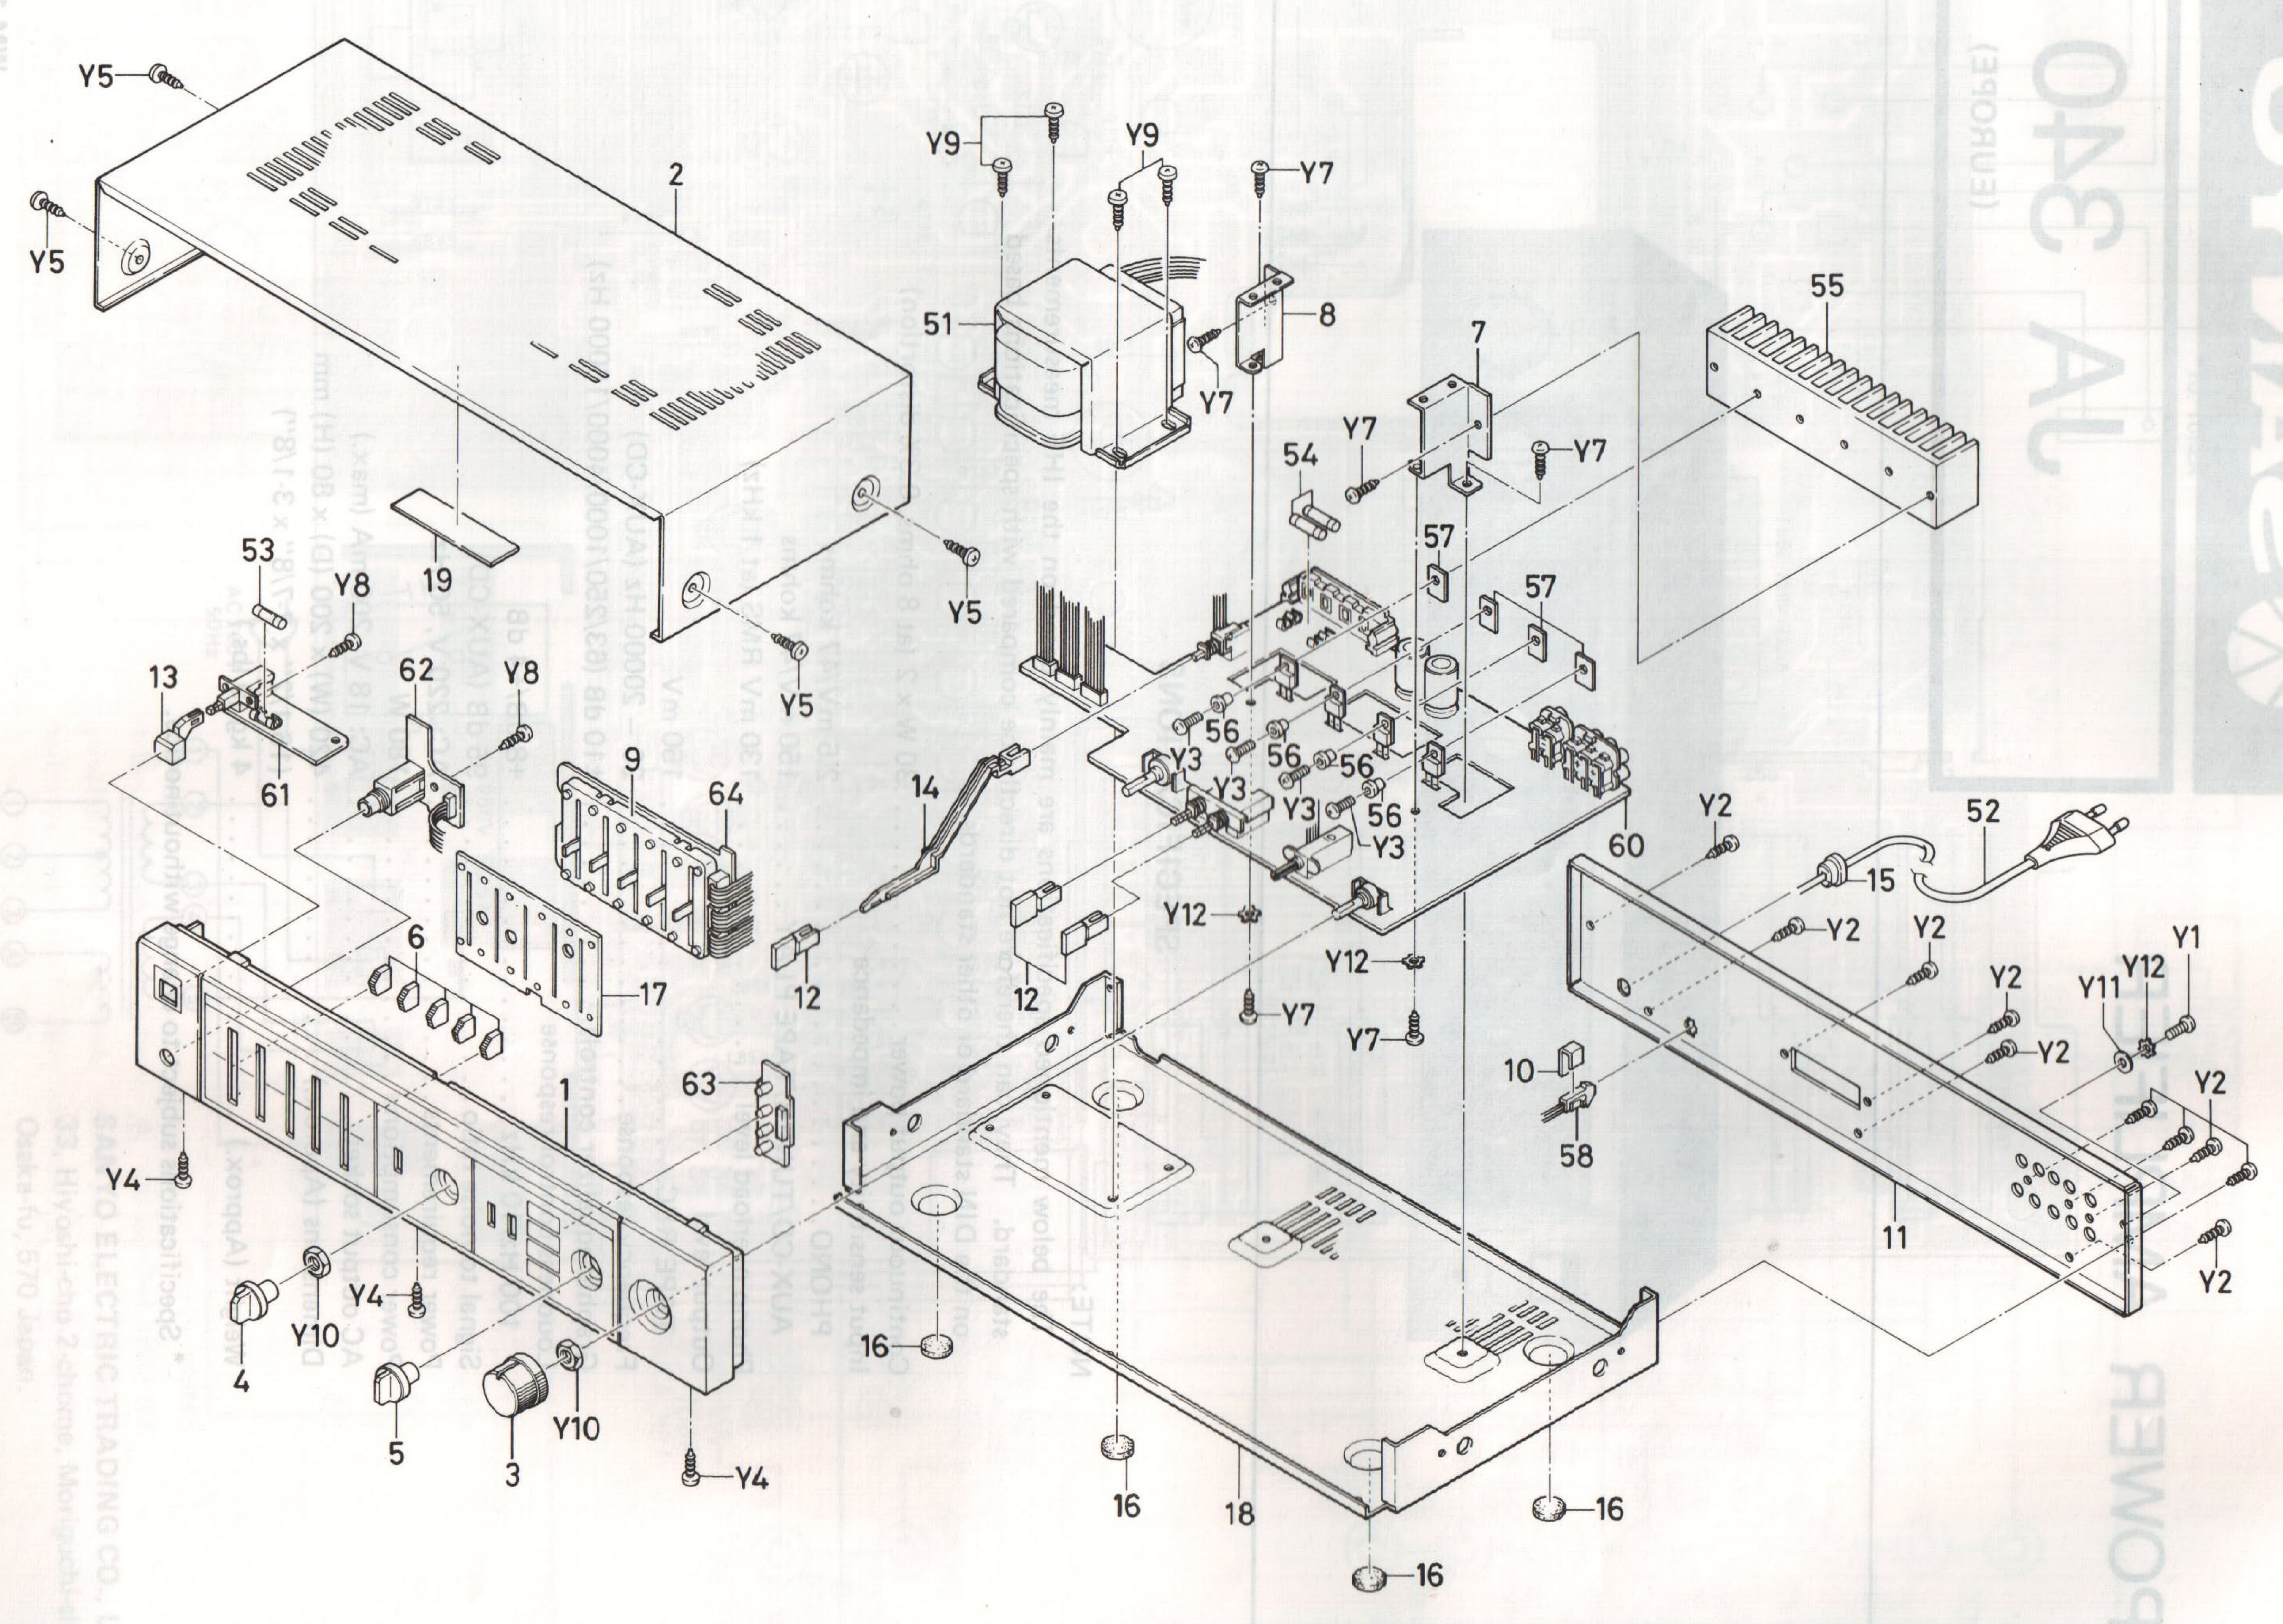

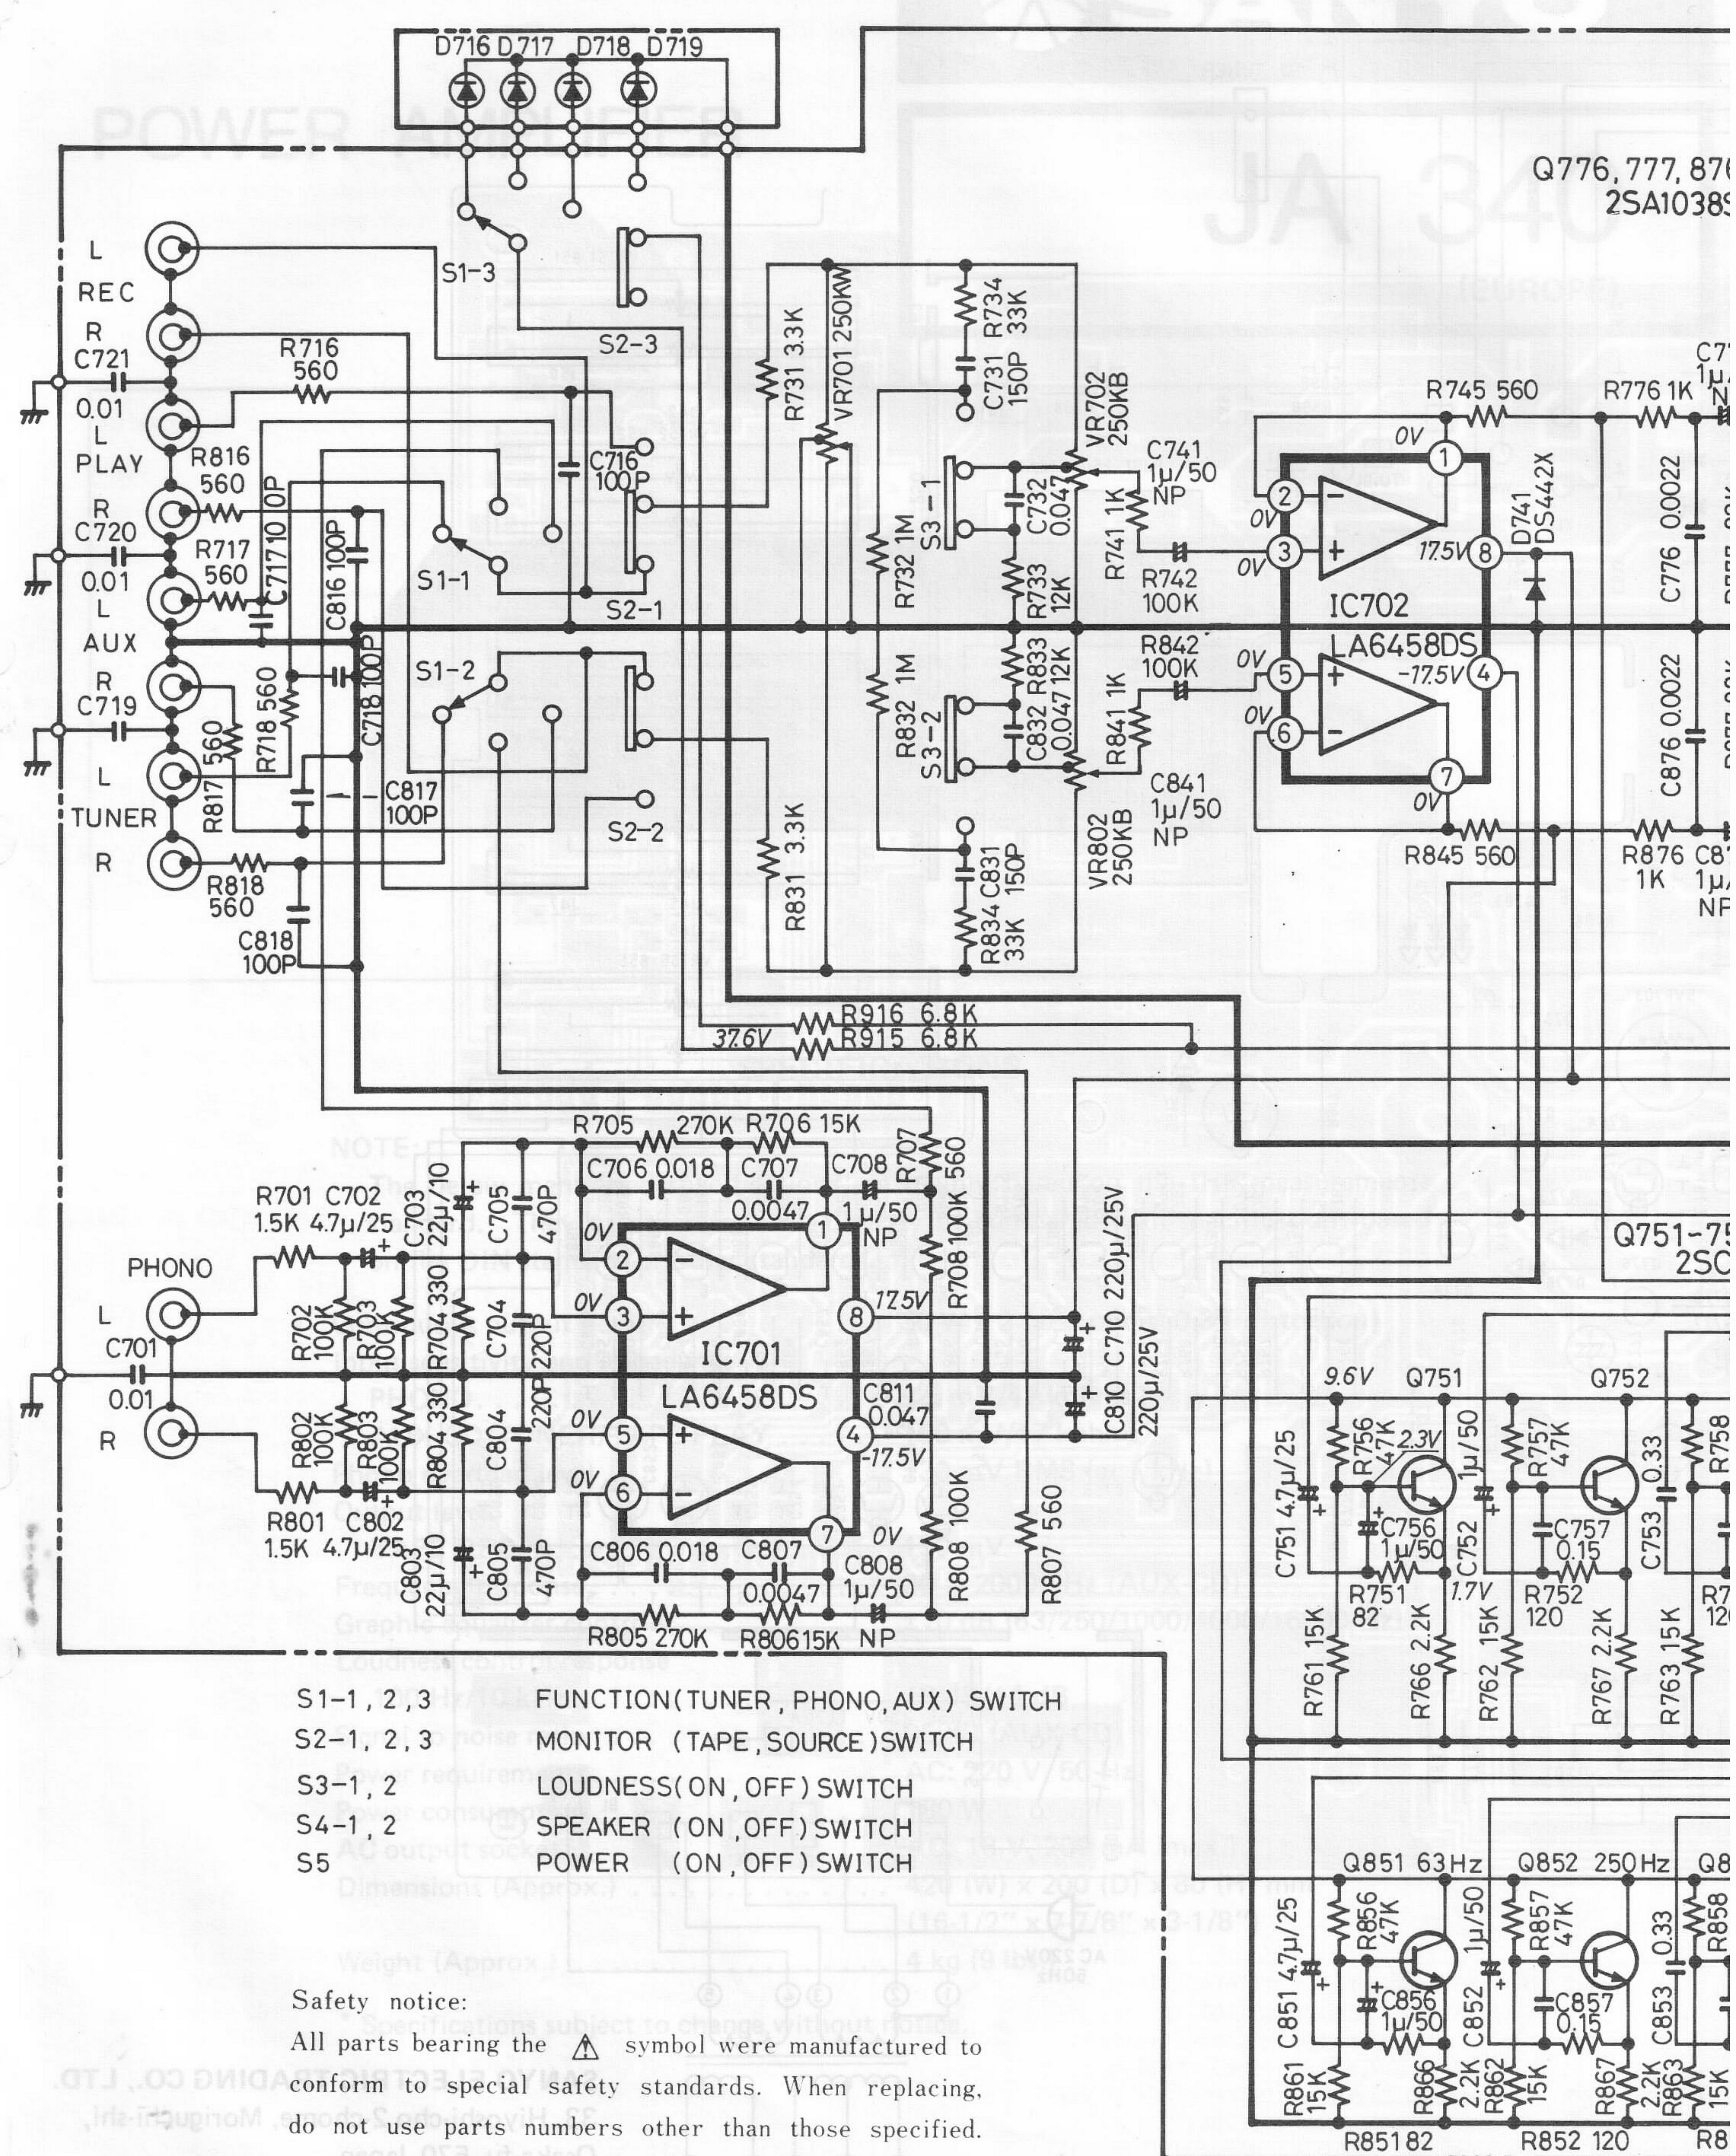

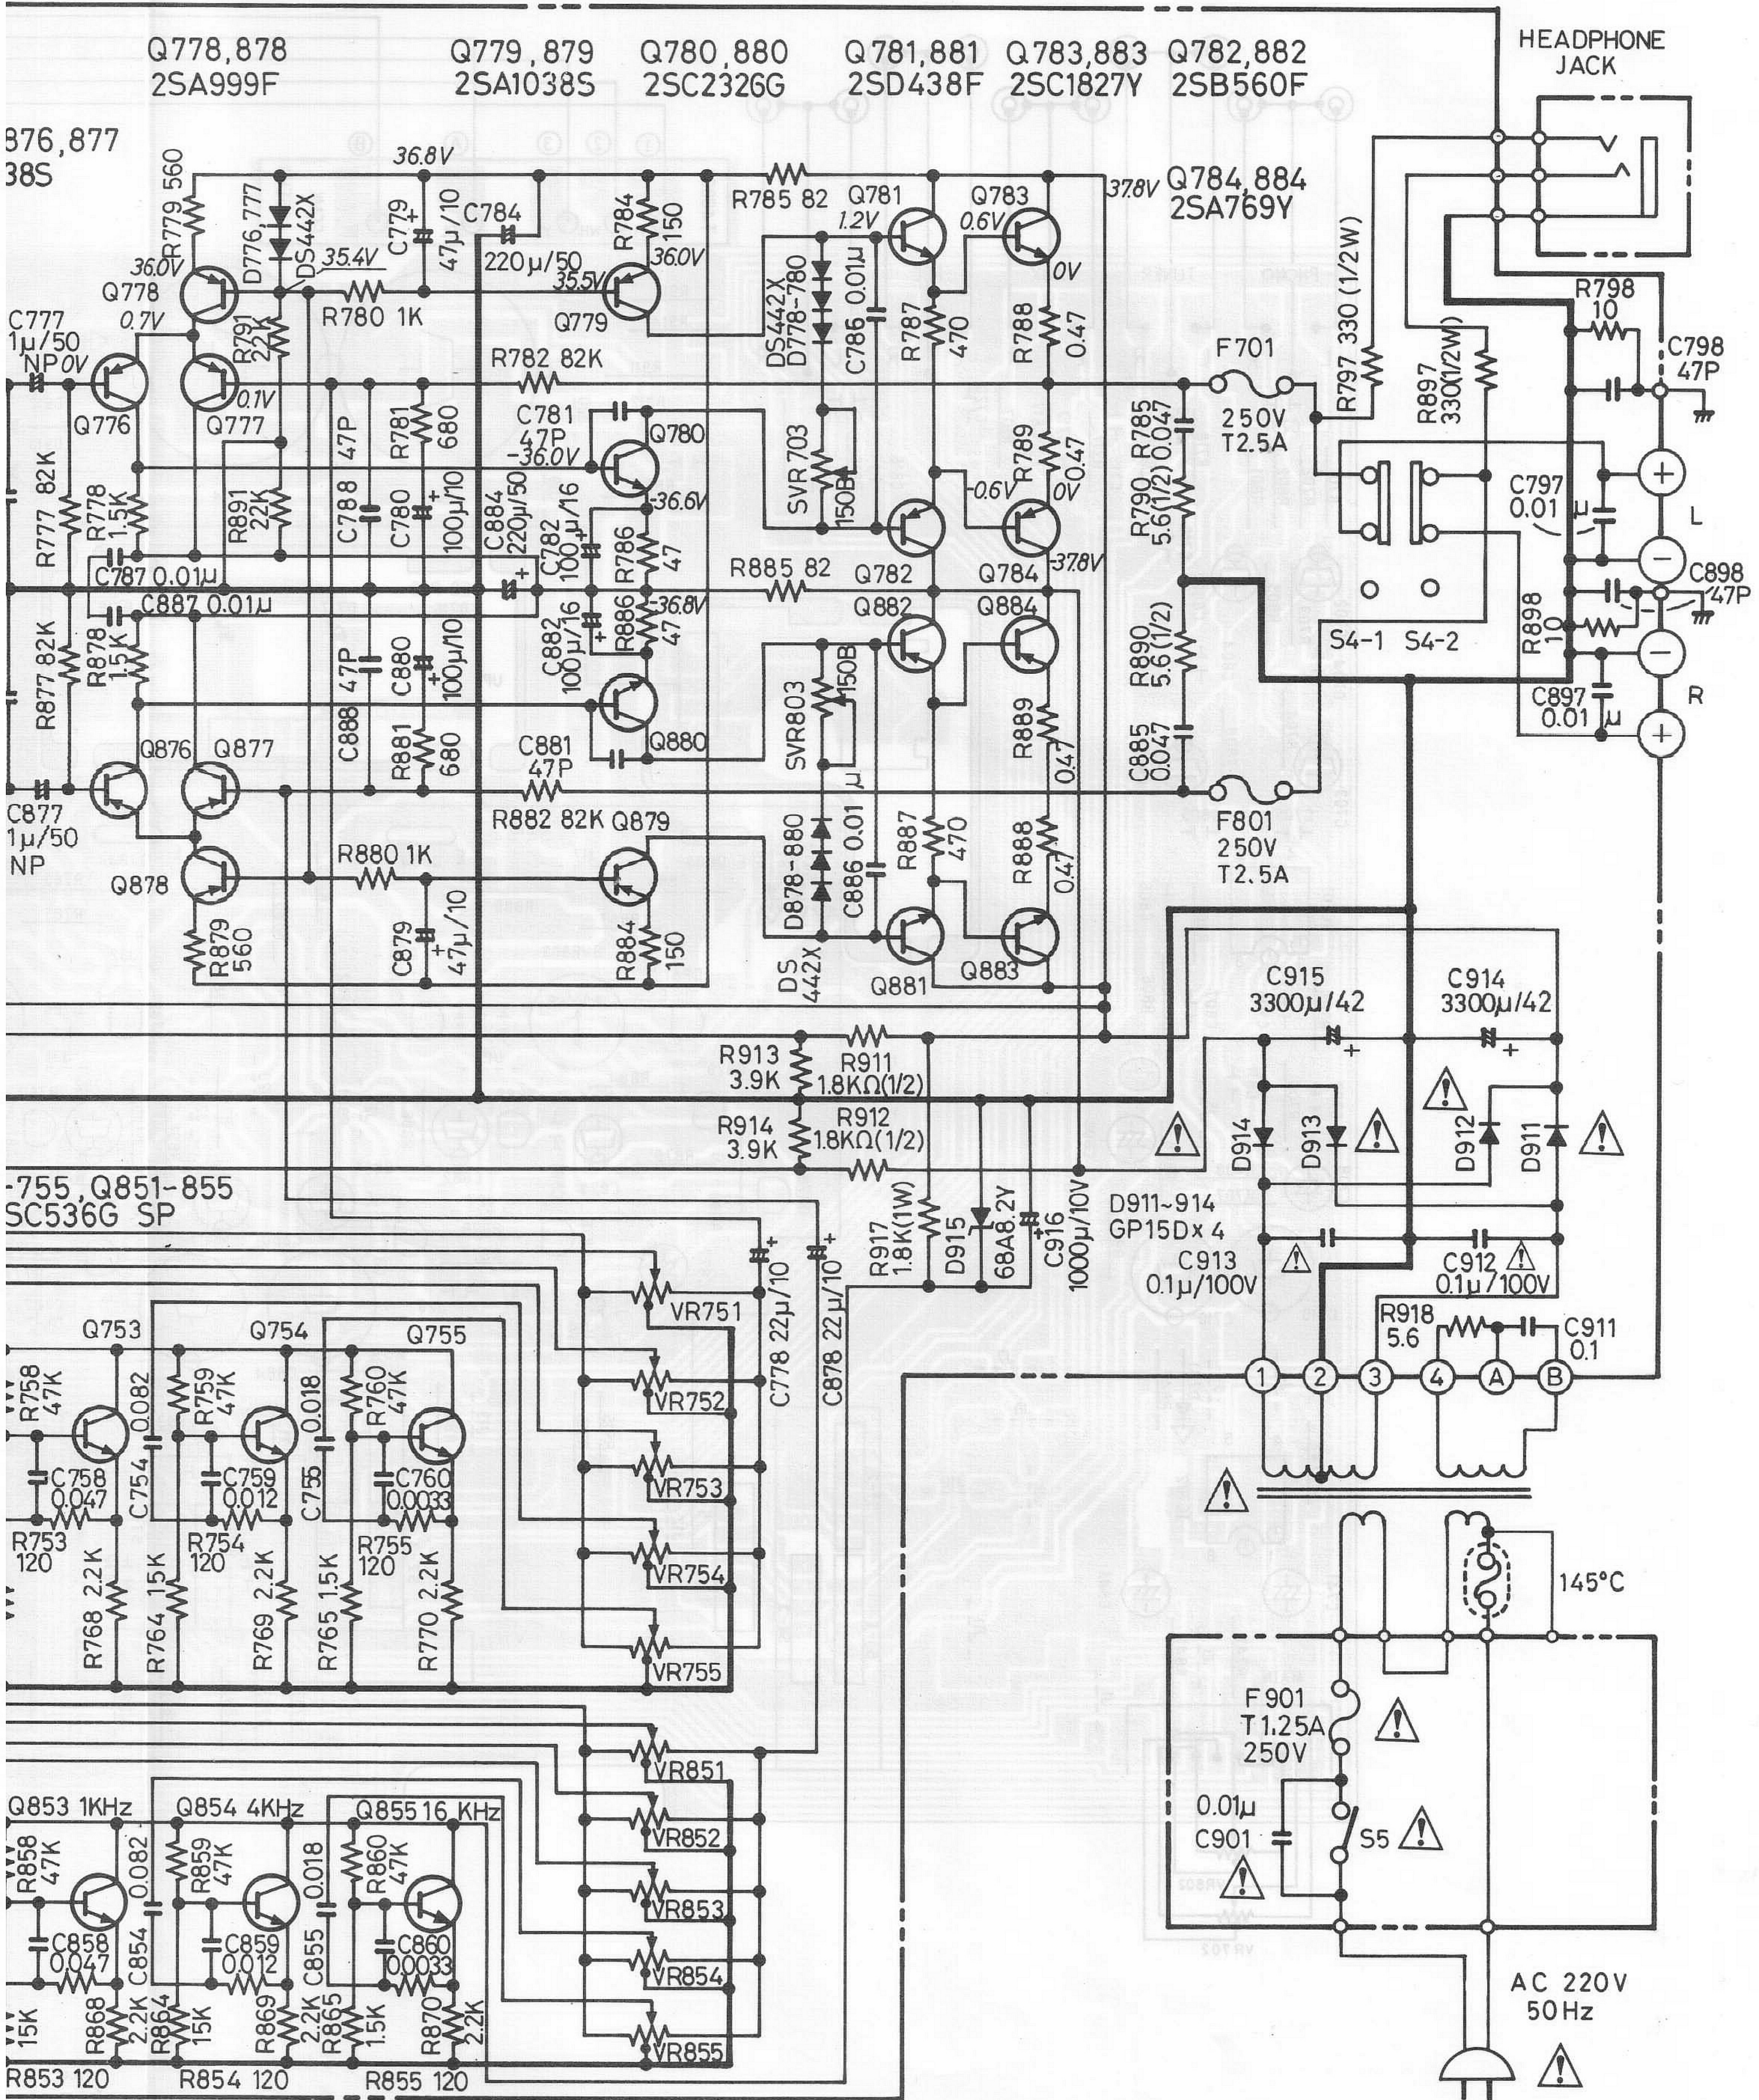

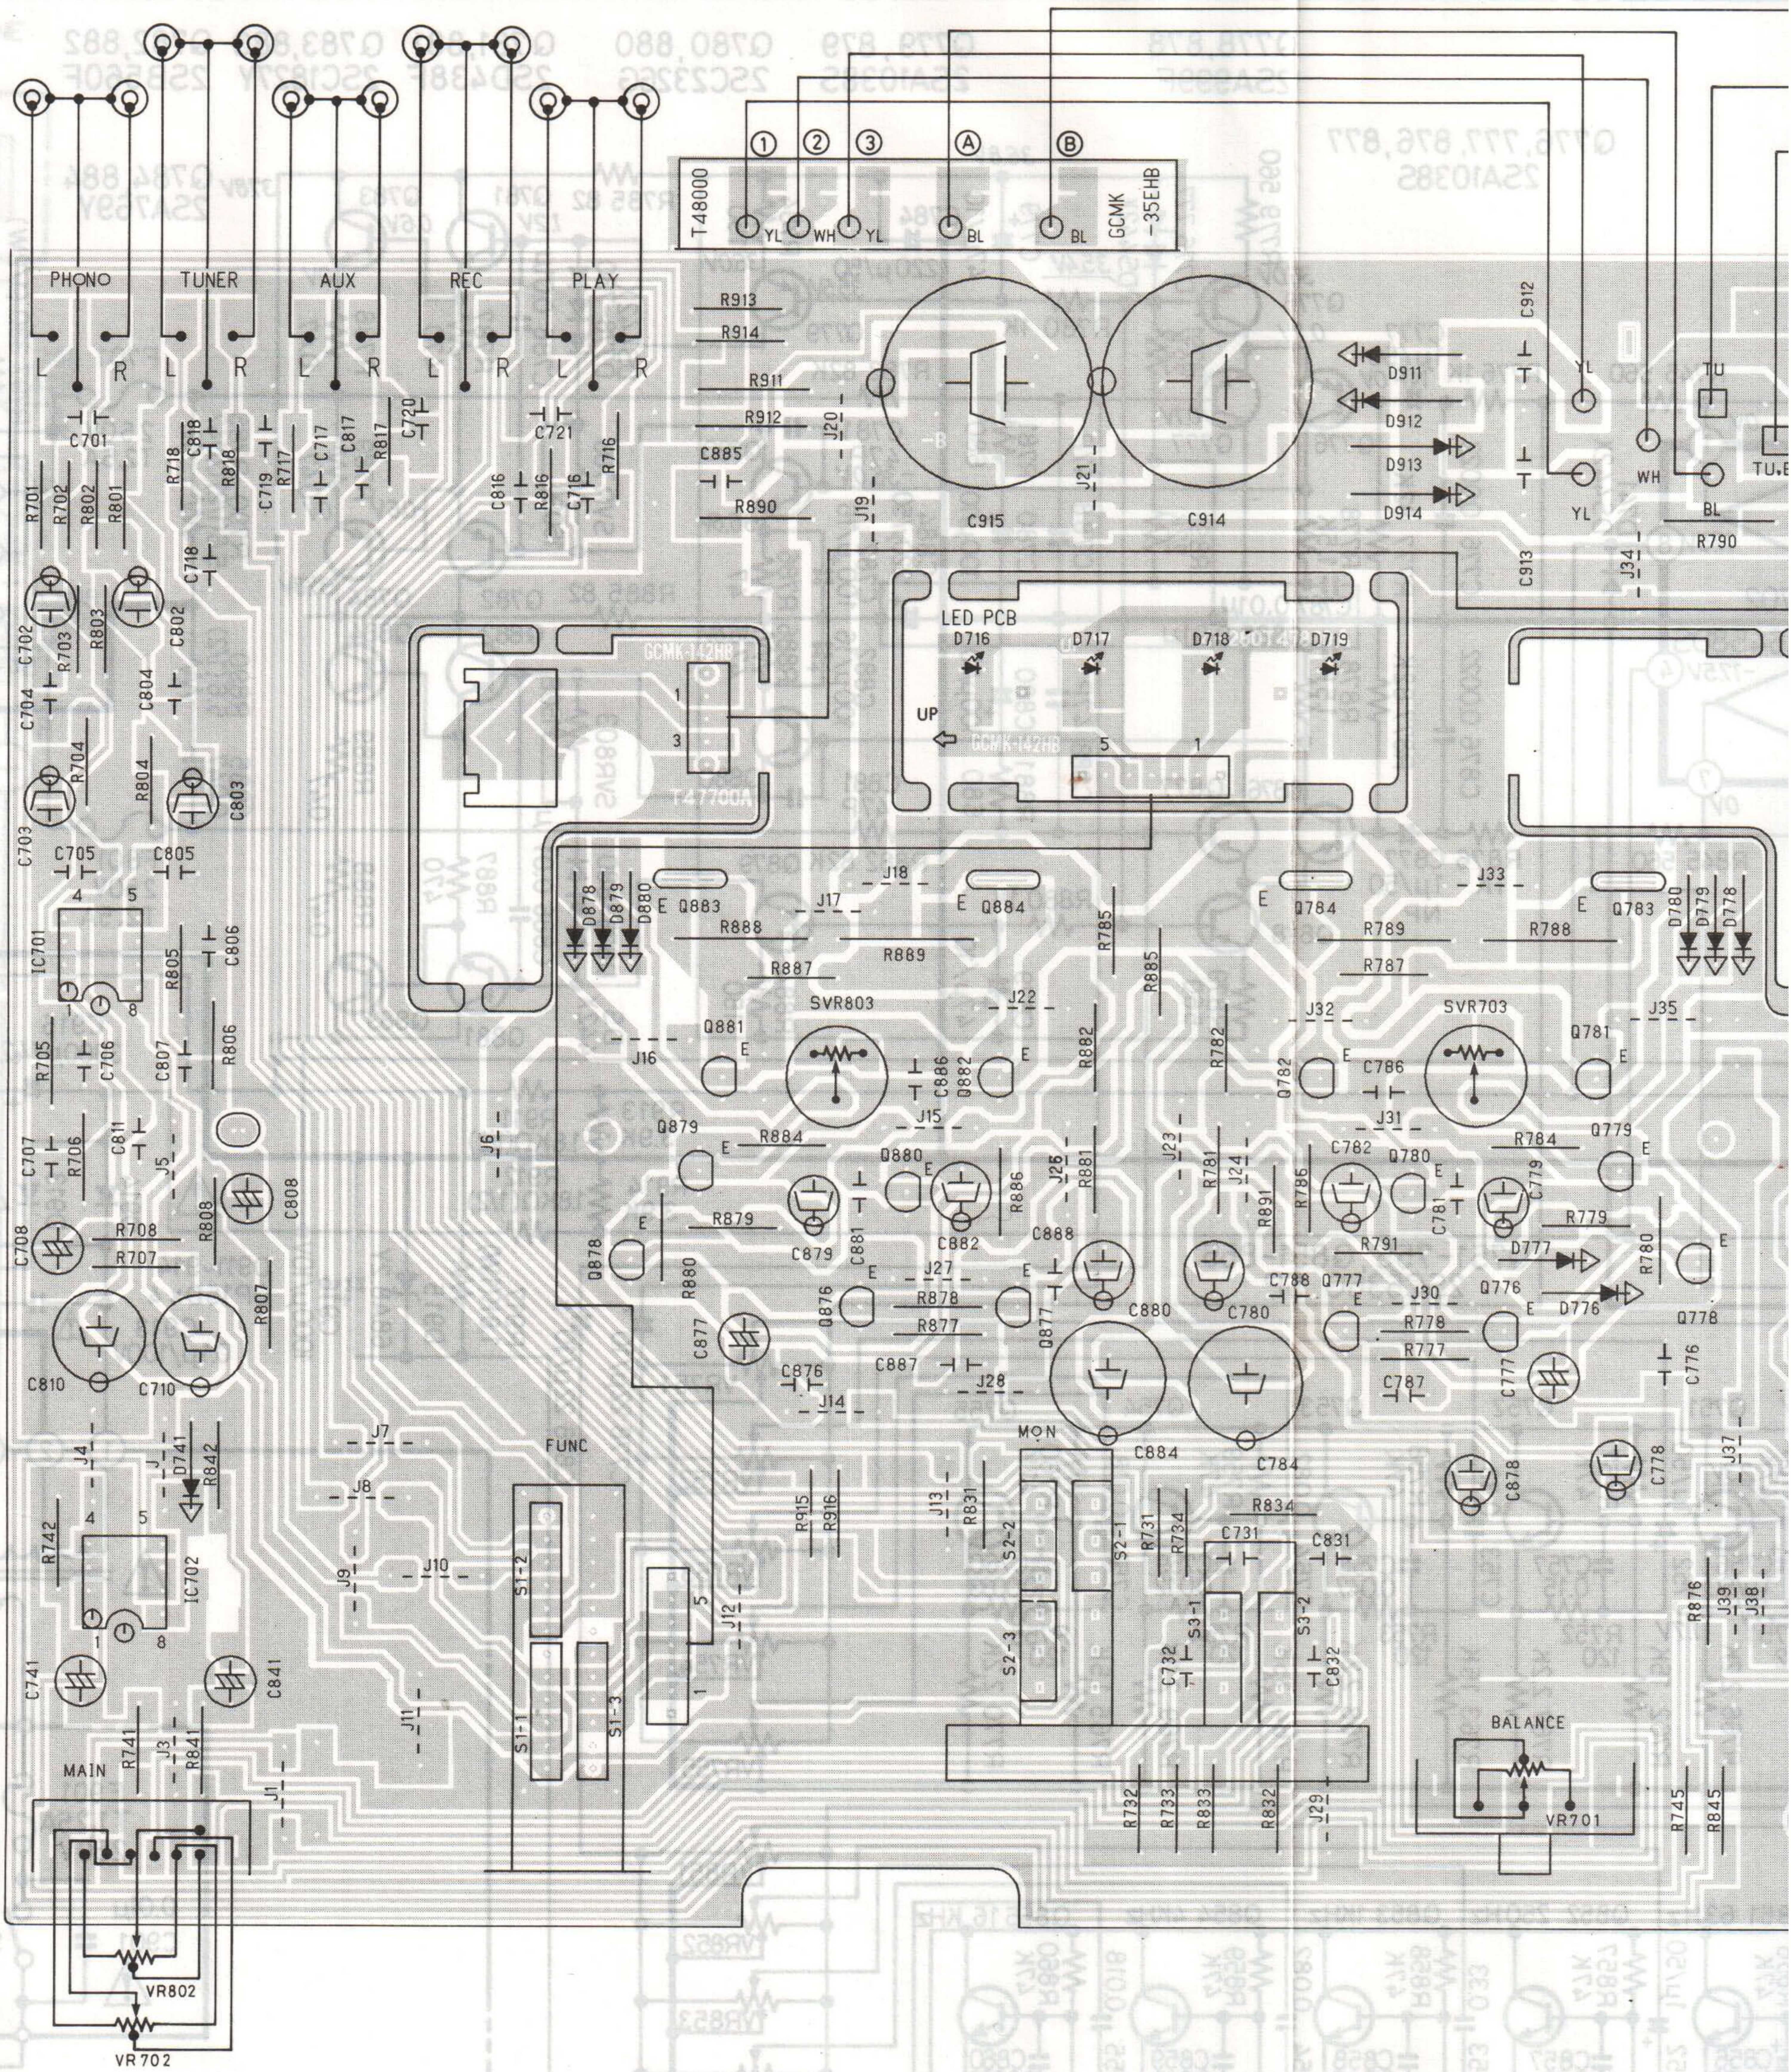

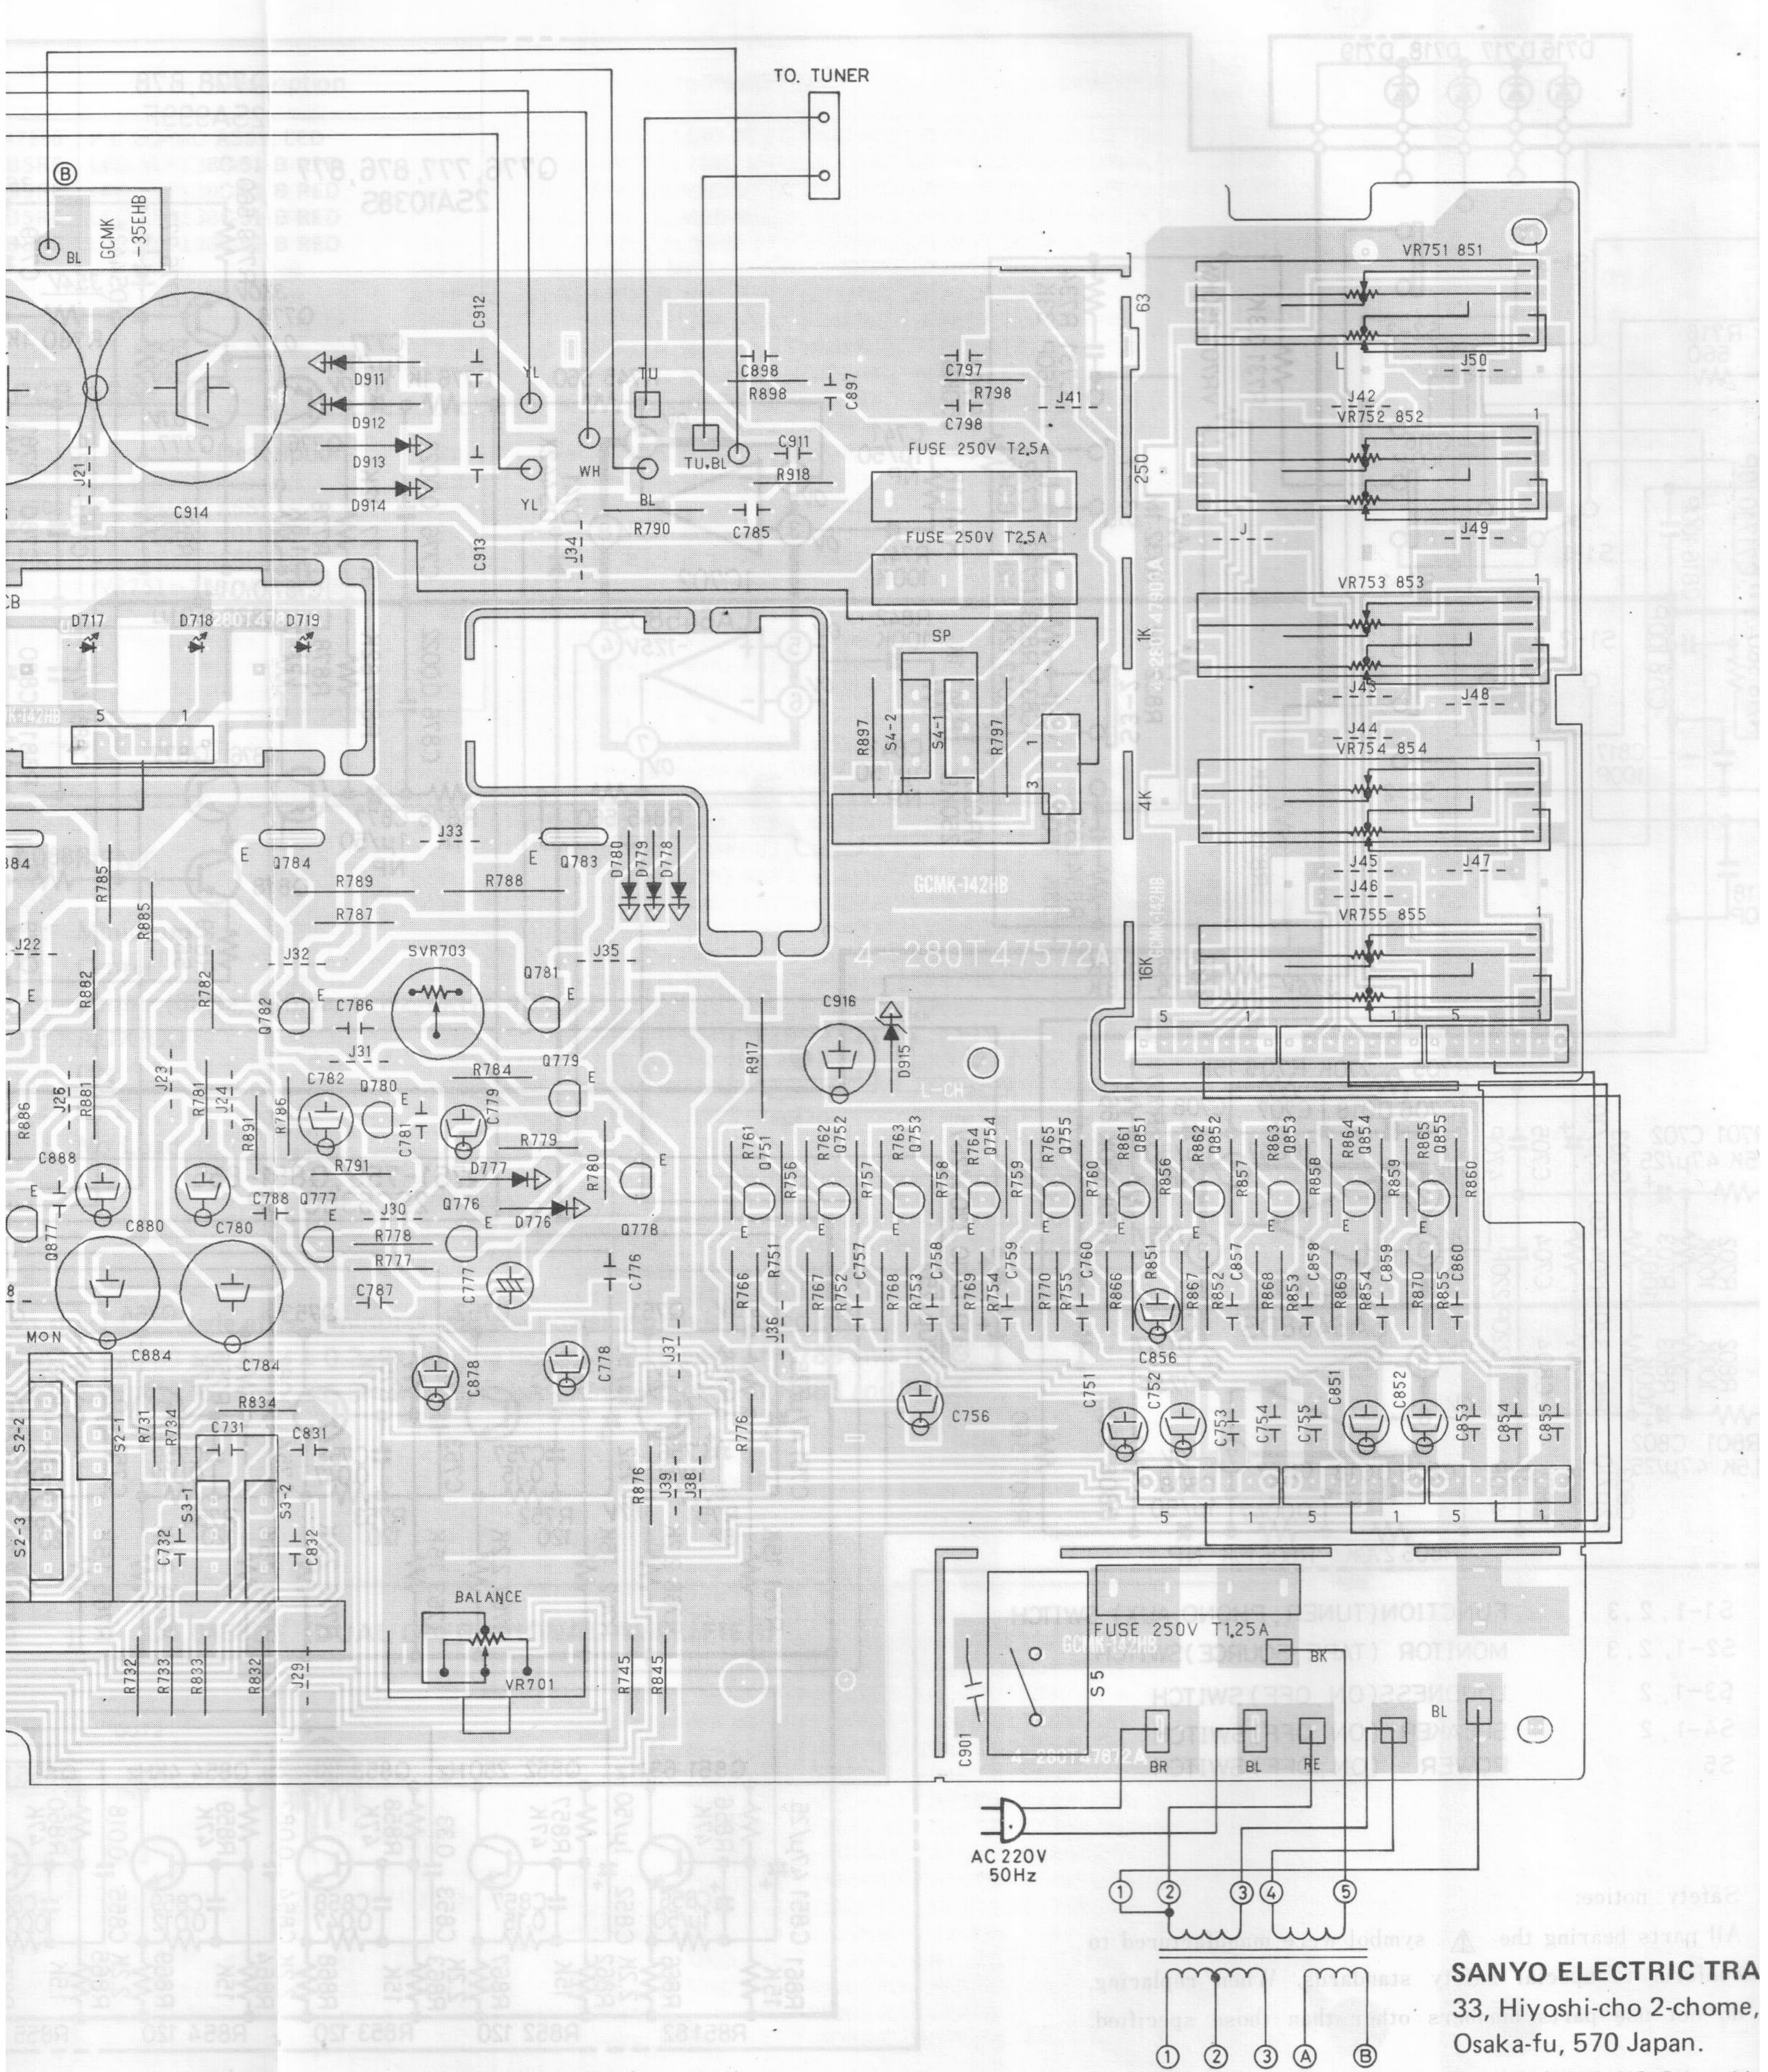

SANYO ELECTRIC TRA
33, Hiyoshi-cho 2-chome,
Osaka-fu, 570 Japan.
Oct./'84/2200 NS Printed in