

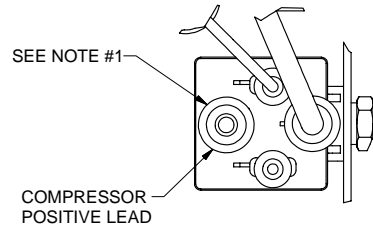
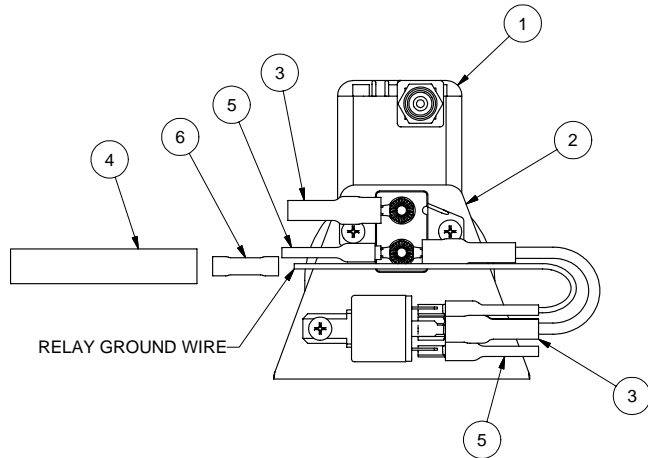


NOTES:

1. CONNECT COMPRESSOR POSITIVE LEAD TO THE TERMINAL CONNECTOR PROVIDED AND THEN INSULATE WITH ITEM 3.
2. TWIST THE COMPRESSOR NEGATIVE LEAD TOGETHER WITH THE GROUND WIRE ATTACHED TO THE RELAY AND INSERT THEM INTO ONE END OF ITEM 6 AND CRIMP.
3. ITEMS 4, 5, AND ONE ITEM 3 REMAIN LOOSE.
4. SECURE ITEM 2 TO THE COMPRESSOR BASE AS SHOWN USING NYLON TIES TO DEMONSTRATE INSTALLATION LOCATION.
5. PACKAGE THIS ASSEMBLY WITH ALL ACCESSORIES THAT COME WITH ITEM 1.

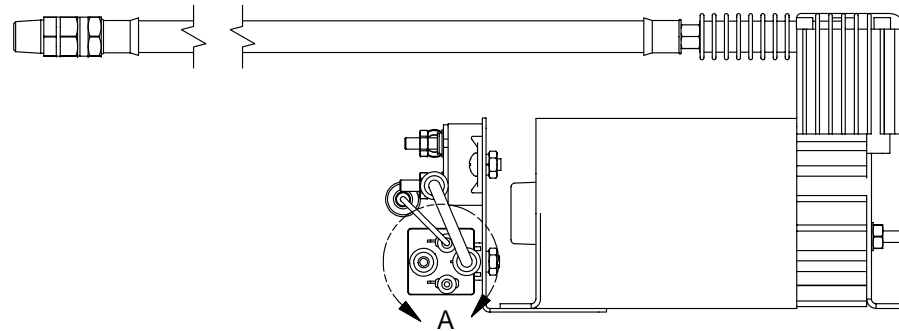

DETAIL A  
SCALE 1 : 1

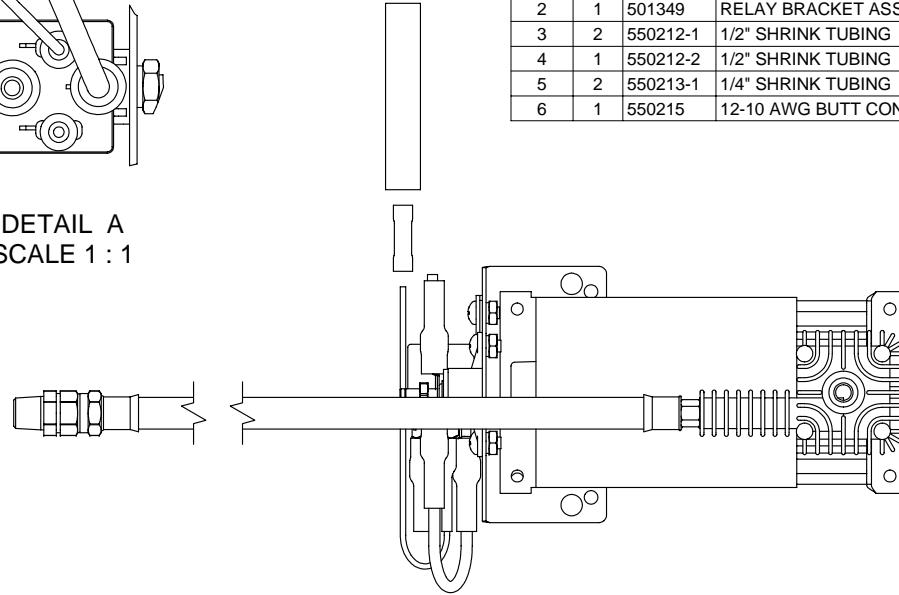

BILL OF MATERIAL			
ITEM	QTY	PART NO	DESCRIPTION
1	1	550298	450C VIAR COMPRESSOR
2	1	501349	RELAY BRACKET ASSEMBLY
3	2	550212-1	1/2" SHRINK TUBING
4	1	550212-2	1/2" SHRINK TUBING
5	2	550213-1	1/4" SHRINK TUBING
6	1	550215	12-10 AWG BUTT CONNECTOR

<b>COMPRESSOR ASSEMBLY</b> TITLE THIRD ANGLE PROJECTION DRAWING NUMBER <b>B 501880</b>		SCALE 1:2	RELEASE DATE 10/12/2005
MATERIAL SUSPENSION TECHNOLOGY INDUSTRIES 1424 SCALE ST., S.W., CANTON, OHIO 44706 PHONE (888) 877-3068 FAX (330) 458-3066		WEIGHT UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES	DATE 10/12/2005
STANDARD TOLERANCES UNLESS SPECIFIED X.X ± .06 X.XX ± .03 X.XXX ± .01		DRAWN BY CHECKED BY	DATE
THIS DRAWING IS THE PROPERTY OF SUSPENSION TECHNOLOGY, INC. AND IS LOANED TO YOU ON THE CONDITION THAT IT IS NOT TO BE REPRODUCED OR COPIED, IN WHOLE OR IN PART, OR USED FOR FURNISHING INFORMATION TO ANY PERSON WITHOUT THE WRITTEN CONSENT OF SUSPENSION TECHNOLOGY, INC. AND ALL COPIES ARE TO BE RETURNED UPON REQUEST.		ENGRG. CHANGE NOTICE 01 1363 Chip 10/12/05 REV. ECN NO. REV. BY REV. DATE	

