


SPECS

INPUT VOLTAGE — 12.8VDC ±20%
 LIGHTBAR CURRENT—7 AMPS (PEAK)
 CON3 CURRENT — 0.5 AMPS (EACH)
 LIN6 CURRENT — 1 AMP (EACH)
 DUTY CYCLE — 40% (MAX)

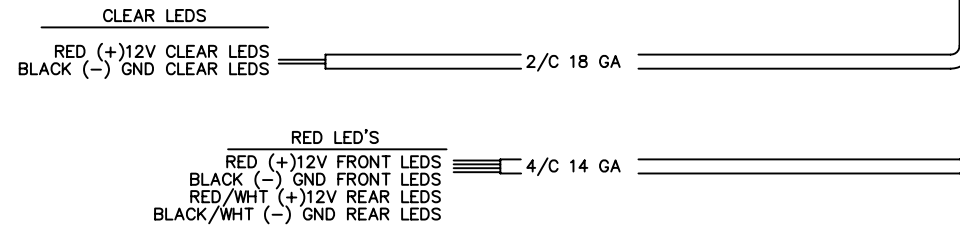

NOTE: MK9S MOUNTING KIT (LOW PROFILE).

© 2009 COPYRIGHT, WHELEN ENGINEERING COMPANY		PIONEERS IN SAFETY SIGNALS	
NFPA JUSTICE MODEL: JE2NFPA		WHELEN ® ENGINEERING COMPANY	
		ROUTE 145 TELEPHONE (860) 526-9504 CHESTER, CT 06412-0684	
DR. —	SCALE NONE	SHEET 1	OF 1
CH. —	DATE —		