



Mounting: Side mount.

Side Clearance: 3/4" (19.5mm)



Height: 3"

Loading: 400 pound class at 18" length.

Size: 12", 14", 16", 18", 20", 22", 24", 26", 28", 30", 32", 34", 36".

Finish: Zinc plated.

Option: 1" overtravel, lengths greater than 36" (special order).

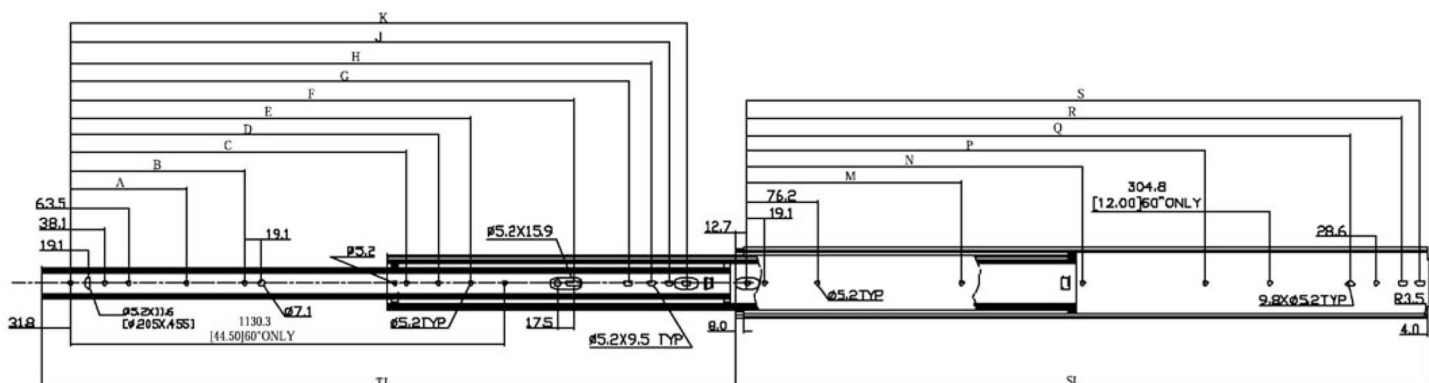

SIZE (IN)	TRAVEL (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	K (mm)	M (mm)	N (mm)	P (mm)	Q (mm)	R (mm)	S (mm)
10	254.0							103.2	128.6	147.6	166.6				152.4	209.6	228.6
12	304.8							154.0	179.4	198.4	217.4				203.2	260.4	279.4
14	355.6							204.8	230.2	249.2	268.2				254.0	311.2	330.2
16	406.4	127.0						255.6	281.0	299.9	319.0				304.8	361.9	381.0
18	457.2	127.0					246.1	306.4	331.8	350.8	369.8				355.6	412.8	431.8
20	508.0	127.0	190.5				296.9	357.2	382.6	401.6	420.6				406.4	463.6	482.6
22	558.8	127.0	190.5				347.7	408.0	433.4	452.4	471.4				457.2	514.4	533.4
24	609.6	127.0	190.5				398.5	458.8	484.2	503.2	522.2				508.0	565.2	584.2
26	660.4	127.0	190.5				449.3	509.6	535.0	553.9	573.0				558.8	615.9	635.0
28	711.2	127.0	190.5				500.1	560.4	585.8	604.8	623.8				609.6	666.8	685.8
30	762.0	127.0	190.5	368.3			550.9	611.2	636.6	655.6	674.6	234.9		501.6	660.4	717.6	736.6
32	812.8	127.0	190.5	368.3			601.7	662.0	687.4	706.4	725.4	234.9	393.7	552.5	711.2	768.4	787.4
34	863.6	127.0	190.5	368.3	469.9		652.5	712.7	738.2	757.2	776.2	234.9	419.1	603.3	762.0	819.2	838.2
36	914.4	127.0	190.5	368.3	520.7		703.3	763.6	789.0	807.9	827.0	234.9	444.5	654.1	812.8	870.0	889.0
38	965.2	127.0	190.5	368.3	571.5		754.1	814.1	839.8	858.8	877.8	234.9	469.9	704.8	863.6	920.8	939.8
40	1016.0	127.0	190.5	368.3	622.3		804.9	865.2	890.6	909.6	928.6	234.9	495.3	755.7	914.4	971.6	990.8
42	1066.8	127.0	190.5	368.3	673.1		855.7	916.0	941.4	960.4	979.4	234.9	546.1	806.5	965.2	1022.4	1041.4
48	1219.2	127.0	190.5	368.3	723.9	825.5	1008.1	1068.4	1093.8	1112.8	1131.8	234.9	596.9	958.8	1117.6	1174.8	1193.8
60	1524.0	127.0	190.5	368.3	774.7	825.5	1312.9	1373.2	1398.6	1417.6	1436.6	234.9	596.9	958.8	1422.4	1479.6	1498.6