

SPECIFICATIONS CHANGE-OUT RECEPTACLES

Series A

- 2-9 Pole Configurations
- 2-4 Pole; #14 AWG, 12 AWG, 10 AWG
- 5-9 Pole; #18 AWG
- Lexan™ or Zinc Diecast Hardware

Series B

- 2-8 Pole Configurations
- 2-7 Pole; #10 AWG
- 8 Pole; #14 AWG
- Anodized Aluminum Hardware



TECHNICAL DATA

Agency Approvals

UL Recognition:

CSA Recognition:

File #E169897

File #LR13963

Electrical Data

Current Rating:

Voltage Rating:

Dielectric Withstand Voltage:

See chart with part number detail

See chart with part number detail

2200 VAC

Environmental Data

Protection:

Temperature Range:

NEMA 1, 3, 4, 6P and 13; IEC IP 68

-20°C to +105°C

Material Data

Body:

Pigtail Leads:

Contacts:

Receptacle Shell:

Series A: Black flame resistant PVC; Series B: Neoprene

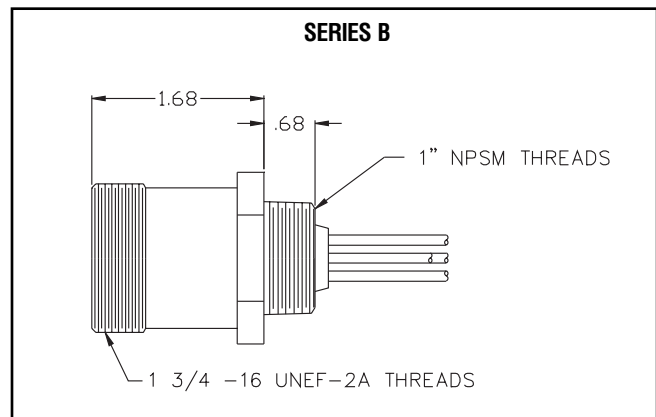
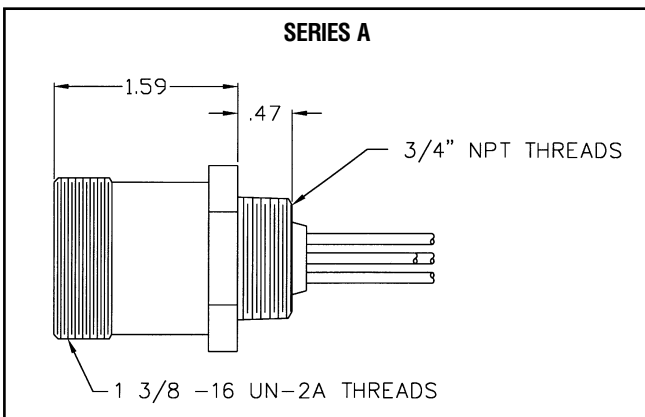
Color coded type MTW or AWM style 1015/1230

Machined Brass, copper

Series A: Zamak or Lexan™




Series B: Machined Aluminum

DIMENSIONS






Lexan is a registered trademark of GE Plastics.




CHANGE-OUT SERIES A FEMALE RECEPTACLES WITH ZINC DIECAST RECEPTACLE SHELL

| POLES | FACE VIEW FEMALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT PIPE THREAD | PART NUMBER |
|-------|---|--|-----------|-----|-------------|-----------------|------------------------|
| 2 |  | 1. Black 2. White | 600V, 18A | 14 | 12" | 1/2" 3/4" | X8651-10P X8651-11P |
| 3 |  | 1. Black 2. White 3. Green | 600V, 18A | 14 | 12" | 1/2" 3/4" | X8652-14P X8652-15P |
| 4 |  | 1. Black 2. Green 3. Red 4. White | 600V, 15A | 14 | 12" | 1/2" 3/4" | X8653-15P X8653-16P |

CHANGE-OUT SERIES A MALE RECEPTACLES WITH ZINC DIECAST RECEPTACLE SHELL




| POLES | FACE VIEW MALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT PIPE THREAD | PART NUMBER |
|-------|---|--|-----------|-----|-------------|-----------------|------------------------|
| 2 |  | 1. Black 2. White | 600V, 18A | 14 | 12" | 1/2" 3/4" | X8651-8P X8651-9P |
| 3 |  | 1. Black 2. White 3. Green | 600V, 18A | 14 | 12" | 1/2" 3/4" | X8652-12P X8652-13P |
| 4 |  | 1. Black 2. Green 3. Red 4. White | 600V, 15A | 14 | 12" | 1/2" 3/4" | X8653-13P X8653-14P |

CHANGE-OUT SERIES A FEMALE RECEPTACLES WITH LEXAN RECEPTACLE SHELL




| POLES | FACE VIEW FEMALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT PIPE THREAD | PART NUMBER |
|-------|---|--|-----------|-----|-------------|-----------------|------------------------|
| 2 |  | 1. Black 2. White | 600V, 18A | 14 | 12" | 1/2" 3/4" | X8651-76P X8651-84P |
| 3 |  | 1. Black 2. White 3. Green | 600V, 18A | 14 | 12" | 1/2" 3/4" | X8652-90P X8652-98P |
| 4 |  | 1. Black 2. Green 3. Red 4. White | 600V, 15A | 14 | 12" | 1/2" 3/4" | X8653-90P X8653-98P |

Note: Special lead lengths available upon request — consult factory.




CHANGE-OUT SERIES A MALE RECEPTACLES WITH LEXAN RECEPTACLE SHELL

| POLES | FACE VIEW MALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT PIPE THREAD | PART NUMBER |
|-------|---|--|-----------|-----|-------------|-----------------|------------------------|
| 2 |  | 1. Black 2. White | 600V, 18A | 14 | 12" | 1/2" 3/4" | X8651-77P X8651-85P |
| 3 |  | 1. Black 2. White 3. Green | 600V, 18A | 14 | 12" | 1/2" 3/4" | X8652-91P X8652-99P |
| 4 |  | 1. Black 2. Green 3. Red 4. White | 600V, 15A | 14 | 12" | 1/2" 3/4" | X8653-91P X8653-99P |

CHANGE-OUT SERIES A FEMALE RECEPTACLES WITH ZINC DIECAST RECEPTACLE SHELL




| POLES | FACE VIEW FEMALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT PIPE THREAD | PART NUMBER |
|-------|---|--|-----------|-----|-------------|-----------------|--------------------------|
| 2 |  | 1. Black 2. White | 600V, 25A | 12 | 12" | 1/2" 3/4" | X8651-654P X8651-655P |
| 3 |  | 1. Black 2. White 3. Green | 600V, 25A | 12 | 12" | 1/2" 3/4" | X8652-654P X8652-686P |
| 4 |  | 1. Black 2. Green 3. Red 4. White | 600V, 20A | 12 | 12" | 1/2" 3/4" | X8653-654P X8653-655P |

CHANGE-OUT SERIES A MALE RECEPTACLES WITH ZINC DIECAST RECEPTACLE SHELL




| POLES | FACE VIEW MALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT THREAD | PART NUMBER |
|-------|---|--|-----------|-----|-------------|--------------|--------------------------|
| 2 |  | 1. Black 2. White | 600V, 25A | 12 | 12" | 1/2" 3/4" | X8651-648P X8651-649P |
| 3 |  | 1. Black 2. White 3. Green | 600V, 25A | 12 | 12" | 1/2" 3/4" | X8652-255P X8652-649P |
| 4 |  | 1. Black 2. Green 3. Red 4. White | 600V, 20A | 12 | 12" | 1/2" 3/4" | X8653-18P X8653-17P |

Note: Special lead lengths available upon request — consult factory.




CHANGE-OUT SERIES A FEMALE RECEPTACLES WITH LEXAN RECEPTACLE SHELL

| POLES | FACE VIEW FEMALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT PIPE THREAD | PART NUMBER |
|-------|---|--|-----------|-----|-------------|-----------------|----------------------------|
| 2 |  | 1. Black 2. White | 600V, 25A | 12 | 12" | 1/2" 3/4" | X8651-1654P X8651-1655P |
| 3 |  | 1. Black 2. White 3. Green | 600V, 25A | 12 | 12" | 1/2" 3/4" | X8652-221P X8652-262P |
| 4 |  | 1. Black 2. Green 3. Red 4. White | 600V, 20A | 12 | 12" | 1/2" 3/4" | X8653-1634P X8653-383P |

CHANGE-OUT SERIES A MALE RECEPTACLES WITH LEXAN RECEPTACLE SHELL




| POLES | FACE VIEW MALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT PIPE THREAD | PART NUMBER |
|-------|---|--|-----------|-----|-------------|-----------------|----------------------------|
| 2 |  | 1. Black 2. White | 600V, 25A | 12 | 12" | 1/2" 3/4" | X8651-1648P X8651-1649P |
| 3 |  | 1. Black 2. White 3. Green | 600V, 25A | 12 | 12" | 1/2" 3/4" | X8652-219P X8652-1649P |
| 4 |  | 1. Black 2. Green 3. Red 4. White | 600V, 20A | 12 | 12" | 1/2" 3/4" | X8653-253P X8653-1649P |

CHANGE-OUT SERIES A FEMALE RECEPTACLES WITH ZINC DIECAST RECEPTACLE SHELL




| POLES | FACE VIEW FEMALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT PIPE THREAD | PART NUMBER |
|-------|---|--|-----------|-----|-------------|-----------------|--------------------------|
| 2 |  | 1. Black 2. White | 600V, 30A | 10 | 12" | 1/2" 3/4" | X8651-656P X8651-657P |
| 3 |  | 1. Black 2. White 3. Green | 600V, 30A | 10 | 12" | 1/2" 3/4" | X8652-656P X8652-657P |
| 4 |  | 1. Black 2. Green 3. Red 4. White | 600V, 25A | 10 | 12" | 1/2" 3/4" | X8653-656P X8653-657P |

Note: Special lead lengths available upon request — consult factory.




CHANGE-OUT SERIES A MALE RECEPTACLES WITH ZINC DIECAST RECEPTACLE SHELL

| POLES | FACE VIEW MALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT PIPE THREAD | PART NUMBER |
|-------|---|--|-----------|-----|-------------|-----------------|--------------------------|
| 2 |  | 1. Black 2. White | 600V, 30A | 10 | 12" | 1/2" 3/4" | X8651-650P X8651-651P |
| 3 |  | 1. Black 2. White 3. Green | 600V, 30A | 10 | 12" | 1/2" 3/4" | X8652-650P X8652-651P |
| 4 |  | 1. Black 2. Green 3. Red 4. White | 600V, 25A | 10 | 12" | 1/2" 3/4" | X8653-650P X8653-651P |

CHANGE-OUT SERIES A FEMALE RECEPTACLES WITH LEXAN RECEPTACLE SHELL




| POLES | FACE VIEW FEMALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT PIPE THREAD | PART NUMBER |
|-------|---|--|-----------|-----|-------------|-----------------|----------------------------|
| 2 |  | 1. Black 2. White | 600V, 30A | 10 | 12" | 1/2" 3/4" | X8651-1656P X8651-1657P |
| 3 |  | 1. Black 2. White 3. Green | 600V, 30A | 10 | 12" | 1/2" 3/4" | X8652-1656P X8652-1657P |
| 4 |  | 1. Black 2. Green 3. Red 4. White | 600V, 25A | 10 | 12" | 1/2" 3/4" | X8653-1656P X8653-384P |

CHANGE-OUT SERIES A MALE RECEPTACLES WITH LEXAN RECEPTACLE SHELL




| POLES | FACE VIEW MALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT PIPE THREAD | PART NUMBER |
|-------|---|--|-----------|-----|-------------|-----------------|----------------------------|
| 2 |  | 1. Black 2. White | 600V, 30A | 10 | 12" | 1/2" 3/4" | X8651-1650P X8651-1651P |
| 3 |  | 1. Black 2. White 3. Green | 600V, 30A | 10 | 12" | 1/2" 3/4" | X8652-1650P X8652-1651P |
| 4 |  | 1. Black 2. Green 3. Red 4. White | 600V, 25A | 10 | 12" | 1/2" 3/4" | X8653-1650P X8653-1651P |

Note: Special lead lengths available upon request — consult factory.

CHANGE-OUT SERIES A FEMALE RECEPTACLES WITH ZINC DIECAST RECEPTACLE SHELL





| POLES | FACE VIEW FEMALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT PIPE THREAD | PART NUMBER |
|-------|---|--|----------|-----|-------------|-----------------|-----------------------|
| 5 |  | 1. Red 2. White 3. Black 4. Orange 5. Green | 300V, 6A | 18 | 12" | 1/2" 3/4" | X8872-1B X8872-11B |
| 6 |  | 1. Red 2. White 3. Black 4. Blue 5. Orange 6. Green | 300V, 6A | 18 | 12" | 1/2" 3/4" | X8871-1B X8871-11B |
| 7 |  | 1. Red 2. White 3. Black 4. Blue 5. Orange 6. Green 7. White-Black | 300V, 5A | 18 | 12" | 1/2" 3/4" | X8870-12B X8870-2B |

CHANGE-OUT SERIES A MALE RECEPTACLES WITH ZINC DIECAST RECEPTACLE SHELL





| POLES | FACE VIEW MALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT PIPE THREAD | PART NUMBER |
|-------|---|--|----------|-----|-------------|-----------------|-----------------------|
| 5 |  | 1. Red 2. White 3. Black 4. Orange 5. Green | 300V, 6A | 18 | 12" | 1/2" 3/4" | X8872-3B X8872-12B |
| 6 |  | 1. Red 2. White 3. Black 4. Blue 5. Orange 6. Green | 300V, 6A | 18 | 12" | 1/2" 3/4" | X8871-3B X8871-12B |
| 7 |  | 1. Red 2. White 3. Black 4. Blue 5. Orange 6. Green 7. White-Black | 300V, 5A | 18 | 12" | 1/2" 3/4" | X8870-13B X8870-4B |

Note: Special lead lengths available upon request — consult factory.

CHANGE-OUT SERIES A FEMALE RECEPTACLES WITH LEXAN RECEPTACLE SHELL








| POLES | FACE VIEW FEMALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT PIPE THREAD | PART NUMBER |
|-------|---|--|----------|-----|-------------|-----------------|------------------------|
| 5 |  | 1. Red 2. White 3. Black 4. Orange 5. Green | 300V, 6A | 18 | 12" | 1/2" 3/4" | X8872-13B X8872-21B |
| 6 |  | 1. Red 2. White 3. Black 4. Blue 5. Orange 6. Green | 300V, 6A | 18 | 12" | 1/2" 3/4" | X8871-19B X8871-27B |
| 7 |  | 1. Red 2. White 3. Black 4. Blue 5. Orange 6. Green 7. White-Black | 300V, 5A | 18 | 12" | 1/2" 3/4" | X8870-22B X8870-14B |
| 9 |  | 1. Green 2. Red 3. White 4. Black 5. Red-Black 6. White-Black 7. Blue 8. Orange 9. Green-Black | 110V, 3A | 18 | 12" | 3/4" | X8980-3B |

CHANGE-OUT SERIES A MALE RECEPTACLES WITH LEXAN RECEPTACLE SHELL

| POLES | FACE VIEW MALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT PIPE THREAD | PART NUMBER |
|-------|---|--|-----------|-----|-------------|-----------------|------------------------|
| 5 |  | 1. Red 2. White 3. Black 4. Orange 5. Green | 300V, 30A | 6 | 12" | 1/2" 3/4" | X8872-14B X8872-22B |
| 6 |  | 1. Red 2. White 3. Black 4. Blue 5. Orange 6. Green | 300V, 30A | 6 | 12" | 1/2" 3/4" | X8871-20B X8871-28B |
| 7 |  | 1. Red 2. White 3. Black 4. Blue 5. Orange 6. Green 7. White-Black | 300V, 25A | 5 | 12" | 1/2" 3/4" | X8870-23B X8870-15B |
| 9 |  | 1. Green 2. Red 3. White 4. Black 5. Red-Black 6. White-Black 7. Blue 8. Orange 9. Green-Black | 110V, 25A | 3 | 12" | 3/4" | X8980-5B |








Note: Special lead lengths available upon request — consult factory.

CHANGE-OUT SERIES B FEMALE RECEPTACLES WITH MACHINED ALUMINUM RECEPTACLE SHELL

| POLES | FACE VIEW FEMALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT PIPE THREAD | PART NUMBER |
|-------|---|--|-----------|-----|-------------|-----------------|-------------|
| 2 |  | 1. White 2. Black | 600V, 25A | 10 | 12" | 1" | X8881-1 |
| 3 |  | 1. Black 2. White 3. Green | 600V, 25A | 10 | 12" | 1" | X8880-1 |
| 4 |  | 1. Red 2. White 3. Black 4. Green | 600V, 20A | 10 | 12" | 1" | X8879-1 |
| 5 |  | 1. Red 2. White 3. Black 4. Orange 5. Green | 600V, 20A | 10 | 12" | 1" | X8878-1 |
| 6 |  | 1. Red 2. White 3. Black 4. Blue 5. Orange 6. Green | 600V, 20A | 10 | 12" | 1" | X8877-1 |
| 7 |  | 1. Red 2. White 3. Black 4. Blue 5. Orange 6. Green 7. White-Black | 600V, 18A | 10 | 12" | 1" | X8876-1 |
| 8 |  | 1. Red 2. White 3. Black 4. White-Black 5. Blue 6. Orange 7. Green 8. Red-Black | 600V, 11A | 14 | 12" | 1" | X8916-1 |

Note: Special lead lengths available upon request — consult factory.

CHANGE-OUT SERIES B MALE RECEPTACLES WITH MACHINED ALUMINUM RECEPTACLE SHELL

| POLES | FACE VIEW MALE | COLOR CODE | RATING | AWG | 1/C PIGTAIL | NPT PIPE THREAD | PART NUMBER |
|-------|---|--|-----------|-----|-------------|-----------------|-------------|
| 2 |  | 1. White 2. Black | 600V, 25A | 10 | 12" | 1" | X8881-3B |
| 3 |  | 1. Black 2. White 3. Green | 600V, 25A | 10 | 12" | 1" | X8880-3B |
| 4 |  | 1. Red 2. White 3. Black 4. Green | 600V, 20A | 10 | 12" | 1" | X8879-3B |
| 5 |  | 1. Red 2. White 3. Black 4. Orange 5. Green | 600V, 20A | 10 | 12" | 1" | X8878-3B |
| 6 |  | 1. Red 2. White 3. Black 4. Blue 5. Orange 6. Green | 600V, 20A | 10 | 12" | 1" | X8877-3B |
| 7 |  | 1. Red 2. White 3. Black 4. Blue 5. Orange 6. Green 7. White-Black | 600V, 18A | 10 | 12" | 1" | X8876-3B |
| 8 |  | 1. Red 2. White 3. Black 4. White-Black 5. Blue 6. Orange 7. Green 8. Red-Black | 600V, 11A | 14 | 12" | 1" | X8916-3B |

Note: Special lead lengths available upon request — consult factory.