



IN-WALL[®] COLUMN CLAMP OEM INSTALLATION MANUAL

L I P P E R T
C O M P O N E N T S[®]

⚠ WARNING

Do not work on your slide-out system unless the battery is disconnected. Failure to act in accordance with the following may result in death or serious personal injury.

⚠ CAUTION

Moving parts can pinch, crush or cut. Keep clear and use caution.

System Information

The LCI In-Wall® column clamp part number 389787 should be utilized for installed In-Wall Slide-out systems only.

Resources Required

- Cordless or Electric Drill or Screw Gun
- Appropriate Drive Bit


Installation

1. Place the LCI In-Wall column clamp (Fig. 1A) on the inside of the slide system (Fig. 1B). The clamp should be flush to the top of the channel, against the bulb seal on the system and hang out over the wall.

NOTE: Use self-drilling screws or drill pilot holes.

2. Use #10 x $\frac{3}{4}$ " screws to attach the LCI In-Wall column clamp to the inside of the In-Wall system.
3. Use #10 screws to fasten the LCI In-Wall column clamp to the wall of the unit.
4. Repeat steps 1 - 3 for the opposite side.

NOTE: Notches around the rivet heads are an indication that the clamp is placed correctly (Fig. 1C).

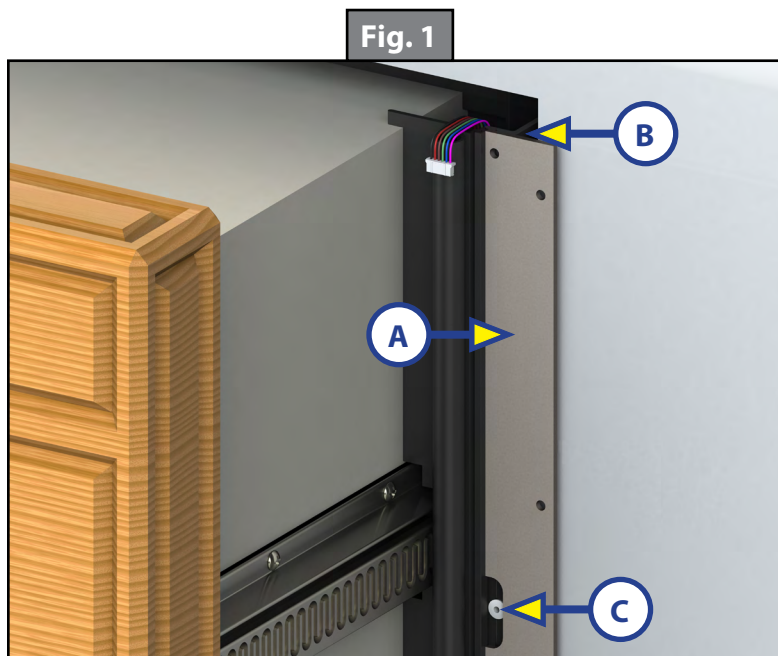

Notes

[illegible]



L I P P E R T C O M P O N E N T S®

The contents of this manual are proprietary and copyright protected by Lippert Components, Inc. ("LCI"). LCI prohibits the copying or dissemination of portions of this manual unless prior written consent from an authorized LCI representative has been provided. Any unauthorized use shall void any applicable warranty. The information contained in this manual is subject to change without notice and at the sole discretion of LCI.

Revised editions are available for free download from lippertcomponents.com.

Please recycle all obsolete materials.

For all concerns or questions, please contact
Lippert Components, Inc.

574-537-8900 | lippertcomponents.com | customerservice@lci1.com