



High Performance Rackmount Storage for Small Businesses

Data is one of the most valuable assets in any business. The sharing, storing, archiving and disaster recovery of data are critical elements in an IT infrastructure. In addition to these universal IT requirements, for a small and medium size business, scalability, ease-of-use and cost effectiveness are essential measurements in selecting the right storage solution.

The 2000 and 3000 series Rackmount ReadyNAS offer the ideal solution to a small and medium size business (SMB) that requires file serving and data

backup to support workgroups of up to 40 employees. The ReadyNAS 2000 and 3000 class products run the same ReadyNAS OS and apps, while the 3000 class products offer higher performance and faster data throughput.

All ReadyNAS support the entire suite of features in ReadyNAS OS, including 5 levels of data protection, ReadyDR disaster recovery, and virtualized storage for VMware and other virtualized networks.

These Rackmount NAS models also come with the latest ReadyNAS OS 6.7 software

for ultimate security and reliability. New features include Cloud backup to Amazon S3 (AWS) on top of Google Drive, Dropbox and Egnyte content management, 3D configuration tool, future-proof and safer Linux 4.4, unique desktop RAID 50 and 60 for more reliable storage, and many more business features that enables the ultimate business features in ReadyNAS. Yield the benefits of the latest industrial and software design from NETGEAR with ReadyNAS storage.

All Inclusive Solution for Data Sharing, Storing & Securing



- **File Sharing:** Unified storage platform for sharing files between Windows, Mac and Linux-based computers



- **Backup & Recovery:** ReadyDR disaster recovery solution based on block level replication technology



- **Hard Drive Redundancy:** RAID redundancy with automatic expansion and unlimited data snapshots for point-in-time restore.



- **App Managed:** Easily manage your ReadyNAS from the palm of your hand with NETGEAR Insight app



- **Cloud Collaboration:** Share selected folders and files with ReadyCLOUD with partners, clients or internal teams



- **Virtualization:** Thin provisioning, iSCSI support and certified with VMware

Key Business Features



- **Automatic Backup & Sync:** Using the ReadyCLOUD app for PC, scheduled protection is easier than ever before



- **Cloud-managed Replication:** Maintain data sets in multiple locations or ensure protection of data from remote or branch office locations



- **Bit Rot Protection:** A proprietary technology protecting your files from unplanned degradation



- **iSCSI and Thin Provisioning:** Powerful tools for a business taking advantage of virtual infrastructures



- **Unlimited Snapshots:** Unlimited data snapshot capability for on-box protection and flexible data recovery



- **Anti-virus & Encryption:** Keep data protected from outside threats and safe from prying eyes



- **X-RAID & Instant Provisioning:** Easily expand capacity and feel confident knowing that data is always protected



- **Modern GUI and Cloud/Remote Access from Anywhere:** Sleek modern interface and patented technology for secure remote access without configuration effort



ReadyNAS Desktop Model Comparison - 210 Series

Hardware	ReadyNAS 2120v2	ReadyNAS 2304	ReadyNAS 3138
CPU	Marvell® Armada XP Dual Core 1.6GHz	Intel Celeron Dual Core 2.0GHz	Intel Atom Quad Core 2.4GHz with QuickAssist
Memory	2GB	2GB	4GB ECC UDIMM
Drive Bays	4	4	4
Drive Types Supported	SATA/SDD 2.5" or 3.5"	SATA/SDD 2.5" or 3.5"	SATA/SSD 2.5" or 3.5"
Hot Swappable Drives	Yes	Yes	Yes
Max Raw Internal Capacity (Based on 10TB drives)	32TB (Based on 8TB drives)	40TB	40TB
eSATA Ports	2	0	2
Gigabit LAN Ports	2	2	4
USB Ports	1 x USB 2.0, 2 x USB 3.0	3 x USB 3.0	1 x USB 2.0, 2 x USB 3.0
Display Port (4k)	0	1	0
Power Supply	Internal 180W: input 100-240V AC, 50/60Hz	Internal 180W: input 100-240V AC, 50/60Hz	Internal 180W: input 100-240V AC, 50/60Hz
Fan (mm)	3 x 40	3 x 40	3 x 40
Dimensions DxWxH (mm)			
Without rackmount brackets	308 x 430 x 44	308 x 430 x 44	406 x 430 x 44
With rackmount brackets		308 x 485 x 44	406 x 486 x 44
Weight (kg)	4.19	4.19	5.21
Chassis Warranty	5 years with NBD HW Replacement	5 years with NBD HW Replacement	5 years with NBD HW Replacement
Software and Functionality	ReadyNAS 2120v2	ReadyNAS 2304	ReadyNAS 3138
Certification and Compatibility			VMware vSphere ESXi 6.0
Cloud-discovery, Setup and Management	Yes	Yes	Yes
Data Protection with Unlimited Snapshots	Yes	Yes	Yes
Web-managed Replication for Disaster Recovery	Yes	Yes	Yes
Real-time Antivirus	Yes	Yes	Yes
iSCSI and Thin Provisioning	Yes	Yes	Yes
ReadyDR	No	Yes	Yes
Insight App Management	No	Yes	Yes

ReadyNAS Solutions

File Sharing

These days, running a successful business often depends on successful file sharing—application data, virtual images, client files, email, all the digital files that make your business go. With ReadyNAS, you finally have an advanced and easy-to-use solution for centralizing, securing, and sharing those critical assets. Faster processors mean more simultaneous users can access unified storage—across PC, Mac and Linux environments. ReadyCLOUD and full Dropbox integration make it easier than ever to sync your important files, photos or videos across all of your web-connected devices.

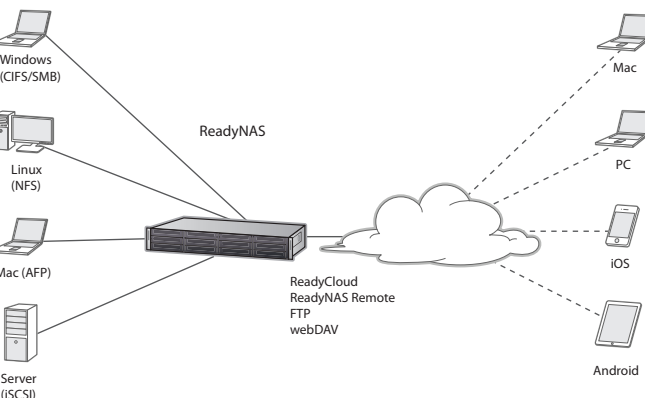
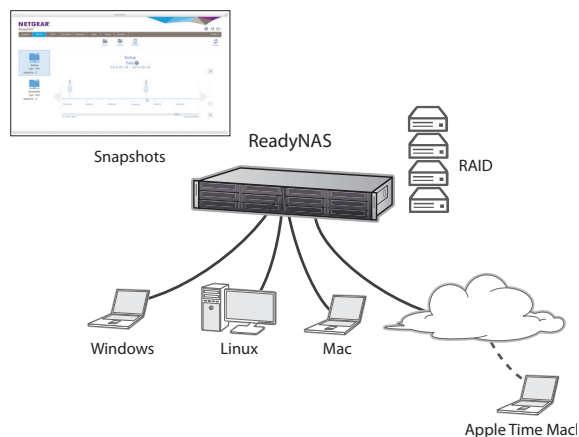


Backup

Unlimited snapshots give you complete control over the past, present, and future of your data. This enterprise-class feature copies any point of time in the file system, can be manually or automatically scheduled, and can restore any version with a simple click. Other data protection innovations for disk-based storage like Real Time Anti-Virus and Encryption bring new confidence to the integrity of your data and back-ups.

Disaster Recovery

The custom-built ReadyNAS OS protects stored data with automatic RAID configuration, the continuous security of Unlimited Snapshots, and easy-to-manage Cloud Replication. By maintaining multiple copies of vital data through cloud replication, it makes it easy for you to move data offsite to protect against natural disasters and theft.

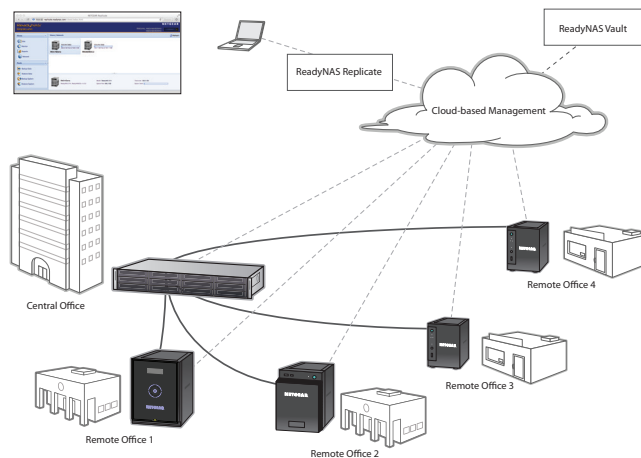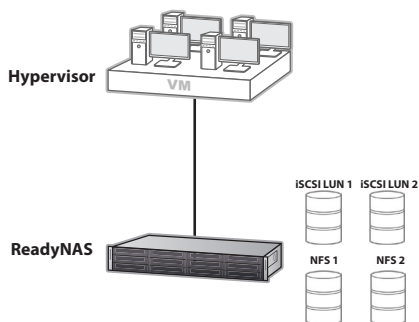

Virtualization

With Unlimited Snapshots, thin provisioning, and improved iSCSI support, ReadyNAS delivers a virtualization platform with next-generation features at an affordable price.

Technical Specifications

Data Protection (Backup & Replication)

- Unlimited block-based snapshots for continuous data protection
- Restore Snapshots to any point in time
- Restore Snapshot data from local admin GUI, ReadyCLOUD, or native Windows File Explorer
- Scheduled and manual snapshots
- File Synchronization (rsync)
- Encrypted Remote Replication
- Cloud managed Remote Replication (ReadyNAS to ReadyNAS). No licenses required for ReadyNAS OS 6 devices.
- AES 256-bit volume based encryption
- X-RAID2 (automatic single volume online expansion)
- Single Disk, JBOD
- RAID Levels: 0, 1, 5, 6, 10 (RAID level support depends on number of drives/bays)
- RAID Global Hot Spare
- eSATA Expansion
- Backup to external storage (USB/eSATA)
- Apple Time Machine support
- Remote Apple Time Machine backup and restore (over ReadyNAS Remote)
- ReadyNAS Vault™ Cloud backup (optional service)
- Dropbox™ file synchronization (requires Dropbox account)
- Real-time Anti-Virus scanning using signature and heuristic algorithms. (No end-user licenses required) Protection for viruses, malware, worms, and Trojans.
- Bitrot automatic detection & correction for degraded media

Storage Area Networks (SAN), Virtualization

- Unlimited iSCSI LUN Snapshot
- Thin or thick provision LUNs
- Multi-LUN per target
- LUN mapping
- LUN masking
- SPC-3 Persistent Reservation (iSCSI)
- MPIO (iSCSI)
- MC/S (iSCSI)
- Max # iSCSI Target: 256
- Max # iSCSI LUN: 256
- VMware ESXi 6.0 certified
- Citrix XenServer 6
- Windows Server 2008 Hyper-V
- Windows Server 2008 Failover Clustering
- Windows Server 2012 R2

ReadyCLOUD (cloud access to ReadyNAS)

- ReadyCLOUD portal based data access and management
- VPN quality remote data transfer and management
- Share data with friends & co-workers directly from portal
- Share file via email link

ReadyCLOUD Client Applications

- ReadyCLOUD client applications for Apple OS X, Microsoft Windows, Android, and Apple iOS
- VPN quality remote data transfer and management
- Simple remote access through ReadyCLOUD client (no firewall or router configuration needed)
- Sync files/folders between PC (Mac/Windows) & ReadyNAS
- Sync files/folders between multiple PCs and ReadyNAS
- Sync files/folders between multiple users and ReadyNAS
- Backup files/folders from PC to ReadyNAS

File System & Transfer Protocols

- ReadyNAS OS 6.7 or later
- Linux 4.x
- Internal File System: BTRFS
- External File System: EXT3, EXT4, NTFS, FAT32, HFS+
- Copy-on-write file system
- Microsoft Network (CIFS/SMB)
- Apple OS X (AFP 3.3)
- Linux/Unix (NFS v3)
- Internet (HTTP)
- Secure Internet (HTTPS)
- File Transfer Protocol (FTP)
- FTP over SSL / TLS (explicit)
- FTP Passive mode with port range setup
- FTP Bandwidth control
- FTP Anonymous
- FTP Transfer Log
- Secure Shell (SSH)
- Web Authoring (WebDAV)
- Storage Array Network (iSCSI)
- File Synchronization (rsync)
- Local web file manager

Users/Groups

- Max # Users: 8192
- Max # User Groups: 8192
- Max # Share Folder: 1024

Users/Groups

- Max # Concurrent Connections: 1024
- Share Folder Level ACL Support
- Advanced Folder Permissions with Subfolder ACL support for CIFS/SMB, AFP, FTP
- Microsoft Active Directory (AD) Domain Controller Authentication
- Local access list
- ReadyCLOUD based ACL
- Domain user login via CIFS/SMB, AFP, FTP

Management

- ReadyCLOUD cloud based discovery and management
- RAIDar local discovery agent share quota (Windows/Mac)
- Save and restore system configuration (clone devices)
- Local event log
- Connection reporting (SMB)
- Local Graphical User Interface (GUI) Languages: English, German, French, Japanese, Chinese, Russian, Swedish, Portuguese, Italian, Spanish, Polish, Czech, Dutch, Korean
- Genie+ marketplace integration to add productivity, media, backup, surveillance and other applications
- Unicode support
- Volume Management
- Thin provision Shares and LUNs
- Instant Provisioning/Expansion with data protection
- Restore to factory default
- Operating Systems supported: Microsoft Windows 7, 8/8.1, 10, Microsoft Windows Server 2008 R2/2012, Apple OS X, Linux/Unix, Solaris, Apple iOS, Google Android
- Supported Web Browsers (Microsoft Internet Explorer 9+, Mozilla Firefox 14+, Google Chrome 20+, Apple Safari 5+)

System Monitoring

- Device capacity, performance, resource and health monitoring
- Bad block scan
- Hard Drive S.M.A.R.T.
- File System Check
- Disk Scrubbing
- Disk Defragment
- Volume balance
- Alerts (SMTP email, LCD, SNMP, local log)
- Auto-shutdown (hard drive, fan, UPS)
- Auto-restart on power recovery

Networking Protocols

- TCP/IP
- IPv4
- Next-generation Internet Protocol (IPv6)
- Static IP Address
- Dynamic IP Address

Networking Protocols	
	Multiple IP Settings
	DHCP Client
	UPnP Discovery
	Bonjour Discovery
	Link Aggregation IEEE 802.3ad
	Port Trunking (balanced round robin, active backup, balance xor, broadcast, 802.3ad link aggregation LACP, transmit load balancing, adaptive load balancing)
	Hash Types IEEE 802.3ad LACP or XOR (Layer 2, Layer3, Layer 4)
	Jumbo Frames
	Static routes
	Secure Shell (SSH)
	Simple Network Management Protocol v2, v3
	Network Time Protocol (NTP)
Media	
	ReadyDLNA (UPnP DLNA Media Server)
	ReadyDLNA streams to any compliant device including Playstation and Xbox
	ReadyDLNA mobile clients for remote media streaming (iOS, Android)
	ReadyDLNA supported music formats (wav, wma, pcm, ogg, mp3, m4a, flac, aac)
	ReadyDLNA supported photo formats (jpg, jpeg)
	ReadyDLNA supported video formats (3gp, mp4, wmv, xvid, vob, ts, tivo, mts, mpeg, mpg, mp4, mov, mkv, m4v, m4p, m2t, m2ts, flv, flc, fla, divx, avi, asf)
	ReadyDLNA supported playlist formats (pls, m3u)
	ReadyNAS Surveillance supports up to 8 cameras (RN2120), 16 HD cameras (RR2304 and RN3138)
	iTunes Server
	iTunes supported audio formats (mp3, m4a, m4p, wav, aif)
	iTunes supported video formats (m4v, mov, mp4)
	iTunes supported playlist formats (m3u, wpl)
	TiVo Archiving
	Plex Media Server streams to DLNA and Plex clients (mobile, desktop, Google TV, Roku, Samsung & LG TVs)
Hardware	
	Intel Celeron Dual Core 2.0GHz (RR2304)
	Intel Atom Quad Core 2.4GHz with QuickAssist (RN3138)
	Memory: 2GB DDR3L (RR2304), 4GB ECC UDIMM (RN3138)
	Floating Point CPU
	Flash: 128MB for OS
	Drive Bays: 4
	Drive Types Supported: SATA/SSD 2.5" or 3.5"
	Hot Swappable Drives
	Two eSATA ports

Hardware	
	One USB 2.0 & Two USB 3.0 ports (RN3138)
	Total solution capacity: 40TB
	2xGigabit Ethernet ports with link aggregation and failover (RR2304)
	4xGigabit Ethernet ports with link aggregation and failover (RN3138)
	LEDs: Power, Activity, Disk, Backup, LAN
	Integrated rackmount ears
	Three 40mm fans
	Dimensions (DxWxH): 308mm x 430mm x 44mm (RR2304) 406mm x 486mm x 44mm (RN3138)
	Weight: 4.19 (RR2304) 5.21 (RN3138)
	Power cord localized to country of sale
Compliance	
	ENGR 10049 EST Environmental Stress Test Guideline
	ENGR 10045 EVT Engineering Validation Test Guideline
	ENGR 10048 CVT Compliance Validation Test Guideline
	ENGR 10046 System Validation Test Guideline
	ENGR 10023 HALT Accelerated Life
	Test Guideline
	ENGR 10036 CDG Component
	Derating Guideline
Environment	
	Noise levels: <28dBA
	Operating Temperature: 0-45C
	Operating Humidity: 20-80% relative humidity, non-condensing
	Power Consumption (Operation): 47.5W (RR2304) 55W (RN3138)
	Power Consumption (Wake on LAN): 0.62W
	Power Consumption (Power Off): 0.11W
	Smart Fan
	Scheduled Power on/off
	Hard drive disk spin down
	UPS Support
	Network UPS with SNMP Management
	Wake on LAN
	Auto-power on (after shutdown)
	AC Input Power Voltage 100V to 240V
	Power Frequency: 50Hz to 60Hz, Single Phase
	Certification: FCC Class B, CE Class B, RoHS, VCCI Class B

Accessories

RTRAY04: Replacement/additional 3.5" or 2.5" hard drive tray

RRAIL04: Sliding rack mount rail

Add-on Applications

One click installation of add-on applications directly through local GUI

Application available for productivity, media, backup, surveillance, and many others

NETGEAR applications include Surveillance, Photo Sharing, Advanced configuration tools

Partner applications include BitTorrent Sync, Plex, Memeo, DVblink

Community applications include Transmission, ownCloud, Qbittorrent, mSQL, VPN server, Syslog, Wordpress, Joomla, Media Wiki, and others

Application availability subject to change

Applications may impact overall performance

Software Development Kit (SDK) available for 3rd party developers

Warranty and Support

Hardware Limited Warranty	5 years*
Next-Business-Day (NBD) Replacement	Yes
Technical Support	90 days free from date of purchase*

* This product comes with a limited warranty that is valid only if purchased from a NETGEAR authorized reseller, and covers unmodified hardware, fans and internal power supplies - not software or external power supplies, and requires product registration at <https://insight.netgear.com> or using the Insight App within 90 days of purchase; see <https://www.netgear.com/about/warranty> for details. Intended for indoor use only.

NETGEAR, the NETGEAR Logo, ReadyNAS, ReadyNAS Cloud, ReadyNAS Vault, and X-RAID are trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Information is subject to change without notice. ©2022 NETGEAR, Inc. All rights reserved.

NETGEAR, Inc. 350 E. Plumeria Drive, San Jose, CA 95134-1911 USA, 1-888-NETGEAR (638-4327), E-mail: info@NETGEAR.com, www.NETGEAR.com