



# FLEX-100

SOLAR MODULE

Solar Flex™ solar panels are designed to provide a powerful charging solution for batteries. Unlike other 'thin' products, Solar Flex™ uses high-efficiency monocrystalline cells that produce more power per square foot than any other flat panel on the market.

An impermeable lamination coats the entire module, allowing it to flex against curved areas and eliminating any need for a bulky frame. The flat, lightweight module is less than 1/8 inch thick and provides an extremely durable surface. The panel can be affixed by adhesive or screw mounting options and quick-connect MC4 cables are an added bonus for ease-of-installation.

Solar Flex™ panels are aerodynamic and DURABLE - a virtually unbreakable solar battery charger.

The FLEX-100 is ideal for:

- Trailers, long-haul and heavy-duty trucks
- Utility service vehicles
- RV/Marine


## Features

- High-efficiency, back-contact solar cells
- Penetrating or adhesive mounting options
- Curves up to 30 degrees
- Durable surface is less than 1/8 in / 3 mm thick
- Industry standard quick-connect cables (MC4) work in series or in parallel
- Marine grade material
- Up to 82% lighter than other solar modules




FLEX-100 SOLAR MODULE

REPRESENTED IN YOUR REGION BY:

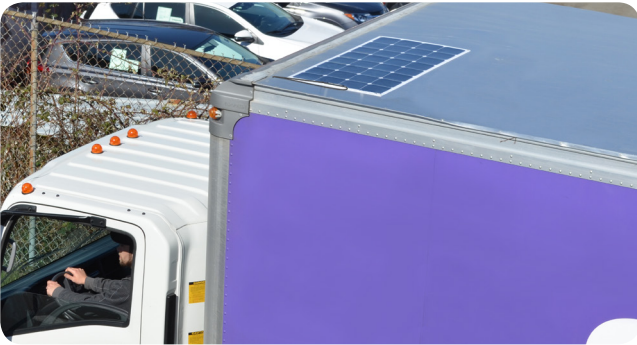

# FLEX-100

SOLAR MODULE

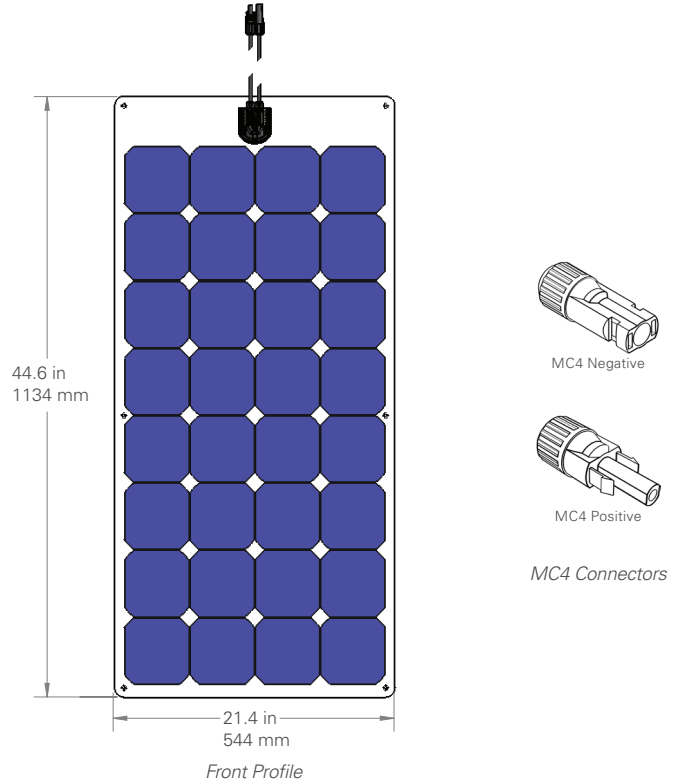

## SPECIFICATIONS

Rated power (Pm)	100W
Maximum power voltage (Vmp)	17.6V
Maximum power current (Imp)	5.68A
Open circuit voltage (Voc)	20.8V
Short circuit current (Isc)	6.14A
Power coefficient	-0.38% / °C
Voltage coefficient	-60.8mV / °C
Current coefficient	2.2mA / °C
Max power tolerance	+/- 5%
Cell type	Monocrystalline
Module efficiency	19.6%
Series fuse rating	10A
Maximum system voltage	600VDC
Weight	2.9 lb (1.35 kg)
Dimensions	44.6 x 21.4 x 0.1 in 1134 x 544 x 3 mm
Frame type / material	Laminated TPT backsheet, includes stainless steel grommets



Power Specifications calculated at STC:

- Irradiance: 1000 W/m<sup>2</sup>
- Cell Temperature: 77 °F (25 °C)
- Air Mass: 1.5

Specifications subject to local environmental conditions.  
Specifications may be subject to change.

"Carmanah" and Carmanah logo are trademarks of Carmanah Technologies Corp.  
Carmanah is a Canadian public corporation - TSX-CMH  
© 2015, Carmanah Technologies Corp.  
Document: SPEC\_FLEX-100\_RevC

