


TECHNICAL DATA

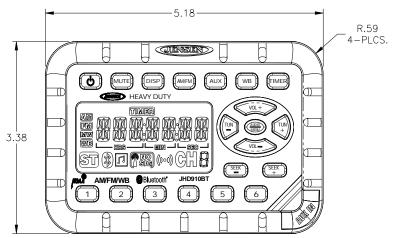



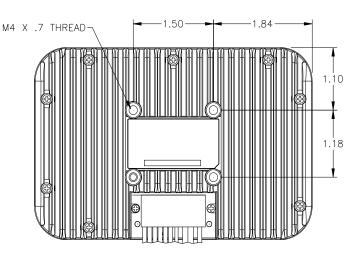

FEATURES:

- 12V DC Power
- Waterproof Front Panel & Chassis (IPx6)
- Corrosion and UV Resistant Materials/Finishes
- Selectable Illumination Color (Green/Amber) for display and buttons
- Electronic US/Euro AM/FM Tuner
- Programmable Station Presets
- 7-Channel NOAA Weatherband with Weather Alert
- 12/24-Hr. Clock with Work Timer
- Bluetooth v2.1 A2DP Playback for the wireless transmission of stereo audio and receive AVRCP commands for controls
- Auxiliary Audio Input
- Non-Volatile Memory
- Beep Confirmation Tone
- Universal Mounting Provisions (AMPS Pattern)
- Interchangeable Cosmetic Skins
- 2-Ch. Amplified Audio Output
- FCC and e-Mark Certified

C.	pecific	ations
S	pecific	auvus


General Specifications

Power System		12 VI	DC
Operating Voltage Range		9V to 18V	
Waterproof Rating		IPx6	
	Idle	0 A	
Current Draw @ 12V	Nominal	.3A	
	Maximum	1.5A	
Operating Temperature Range		-22°F to 185°F	-30°C to 85°C
Storage Temperature Range		-40°F to 185°F	-40°C to 85°C
Maximum Relative Humidity		1000	/ o
Overall Dimensions		5.2Wx3.4Hx1.8D	
Product Weight (unpackaged)		1.251	bs

Performance Specifications

1 ci i ci	pecifications	
FM Sensitivity		2 uV
AM Sensitivity		20 uV
WB Sensitivity		1 uV
Signal to Noise		>50 dB
Outrost Domina	RMS	2 x 6 W
Output Power	Maximum	18 W
Total Harmonic Distortion		.1%

TECHNICAL DATA

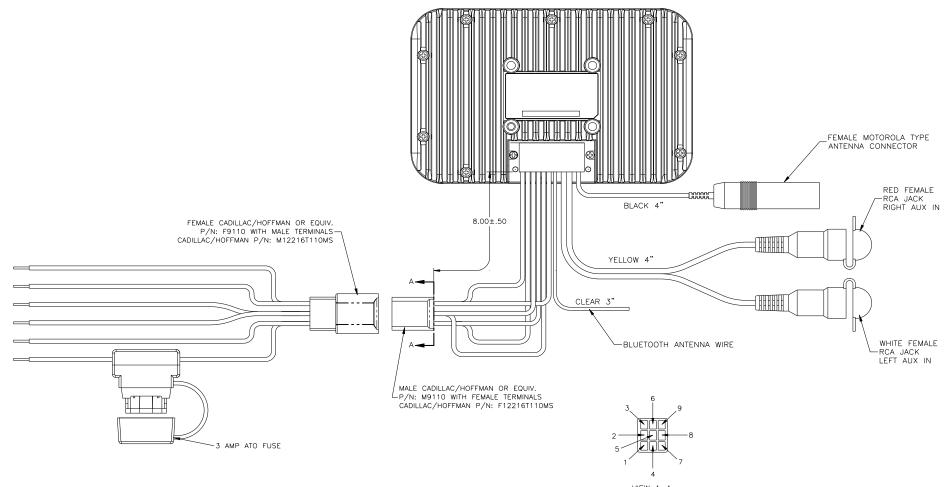

VIEW A-A WIRE INSERTION VIEW

PIN NO.	WIRE COLOR	DESCRIPTION
1	EMPTY	NO CONNECTION
2	WHITE/BLACK	LEFT SPEAKER (-)
3	EMPTY	NO CONNECTION
4	WHITE	LEFT SPEAKER (+)
5	GRAY/BLACK	RIGHT SPEAKER (-)
6	GRAY	RIGHT SPEAKER (+)
7	RED	+12V ACC
8	EMPTY	NO CONNECTION
9	BLACK	GROUND