



NOTES:

1. SWITCH & BEZEL ASSEMBLY TO INCLUDE PLASTIC SWITCH BEZEL.
2. BLACK PLATE WITH VERBIAGE ON IT, AND SWITCH. SWITCH TO BE ASSEMBLED TO BLACK PLATE.
3. EACH ASSEMBLY TO BE BAGGED INDIVIDUALLY.
4. MATERIALS AS FOLLOWS:
BEZEL MAT'L = POLYSTYRENE
BEZEL COLOR = BLACK
PLATE MAT'L = POLYSTYRENE
PLATE COLOR = BLACK
SWITCH = 10 AMP 250 VAC
SWITCH COLOR = BLACK
TEXT COLOR = SILVER
5. MOUNTING HOLES IN SWITCH PLATE TO BE CENTERED WITH MOUNTING HOLES IN BEZEL (.04) MAX.
6. ROCKER SWITCH SPECS:
MIDSIZE SNAP-IN, NON-ILLUMINATED
10 AMP MIN., 250 VAC
SINGLE POLE, DOUBLE THROW
MOMENTARY ON-OFF-ON
PANEL PIERCING DIM: .550" X 1.125"
1/4" MALE QUICK DISCONNECT (3 PLACES)

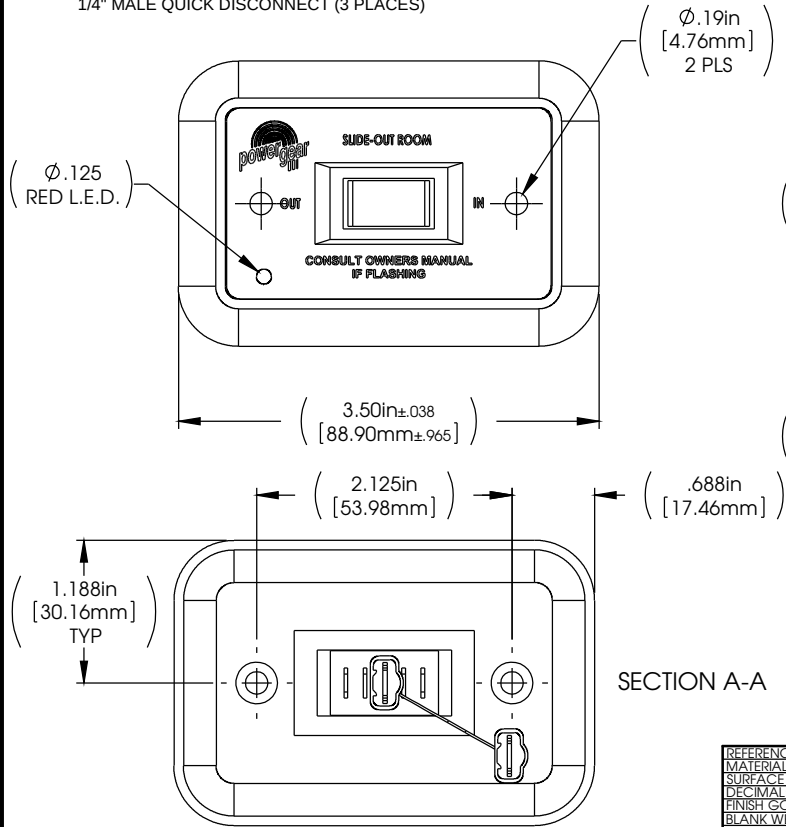

STANDARD (SINGLE) BARREL,
1/4" FEMALE TAB, FULLY INSULATED,
QUICK DISCONNECT TERMINAL
MOLEX P/N 01-90-02-0001,
01-90-03-0008, 01-90-05-0001
OR EQUIVALENT
ATTACHED QUICK DISCONNECT A
TO CENTER TERMINAL NUMBER 2

STANDARD (SINGLE) BARREL,
1/4" MALE TAB, FULLY INSULATED,
QUICK DISCONNECT TERMINAL
MOLEX P/N 01-90-01-0001
OR EQUIVALENT
2 PLACES

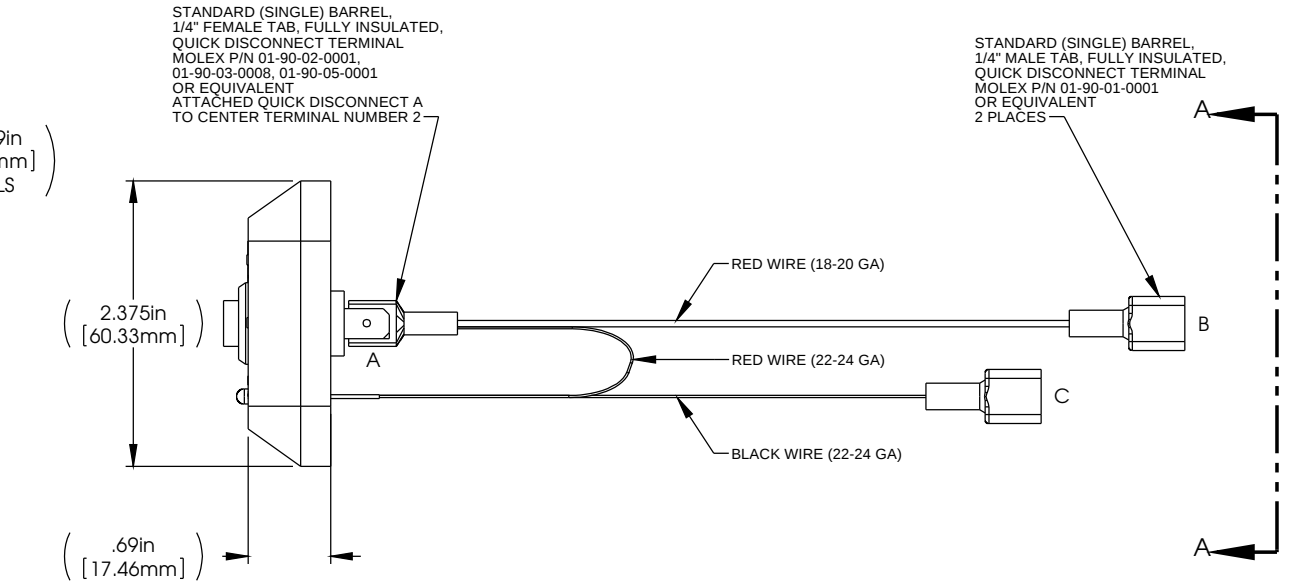

A	RED RED	18-20 22-24	B LED1
C	BLACK	22-24	LED2
QUICK DISCONNECT	COLOR	GA	CONNECTOR/PIN

TITLE: ROOM SLIDE SWITCH IN-WALL ROCKER (1510000240-RS)			
UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS ARE IN INCHES BREAK SHARP EDGES & DEBURR 2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		TOLERANCES (EXCEPT AS NOTED) DECIMAL .X $\pm$.1 .XX $\pm$.010 .XXX $\pm$.005	
FILLETS R.015 FINISH 125/		THIRD ANGLE PROJECTION	
FRACTIONAL $\pm$ 1/16		ANGULAR $\pm$ 1°	
LIPPERT COMPONENTS		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LIPPERT COMPONENTS, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LIPPERT COMPONENTS, INC. IS PROHIBITED.	
DWG. NO. 370720	SIZE B	DATE 01/28/2015	REV. B
DRAWN BY MTH	CHECKED BY MTH	APPROVED BY	SHEET 1 OF 1

REFERENCE NUMBER:	PG: 1510000240-RS
MATERIAL TYPE:	ASTM A1011 CS TY B; STL
SURFACE QUALITY:	
DECIMAL:	
FINISH GOOD WEIGHT:	0.446
BLANK WEIGHT:	
BLANK SIZE:	X